

# Acute TravelScope Digital Storage Oscilloscope



150 x 123 x 33 mm<sup>3</sup>  
Device Weight: 400g

- PC-based, USB3.0 interface / powered (Type-A / Type-C)
- Record length : 128Mpts/ch
- Channel : 4
- Sample rate : 1 GS/s
- Bandwidth : 200 MHz
- Data Logger (HDD / SSD Storage)
- Digital Voltmeter : 3 digits
- Frequency Counter : 5 digits
- DSO Trigger I : Edge, Either, External, Falling, Rising, Video, Width
- DSO Trigger II : Runt, Pattern/State, Timeout, Transition, Setup/Hold, B-Trigger, B-Event, Window
- Protocol Trigger/ Decode : BiSS-C, CAN 2.0B/CAN FD, DALI, DP\_Aux<sup>[1]</sup>, MIPI I3C 1.1.1, USB PD 3, ...

Model	Vertical Resolution	Cascade	DSO Trigger	Protocol Trigger/ Decode	Electrical Validation <sup>[*]</sup>
TS3124E	8 bits	-	I	-	-
TS3124B	8 bits	-	I, II	Yes	-
TS3124H	8, 12~16 bits	16 Ch (4x Device)	I, II	Yes	-
TS3124V	8, 12~16 bits	16 Ch (4x Device)	I, II	Yes	I2C, MIPI I3C, ...

## Software Window



## System Requirements

- USB 3.0 port
- Windows 7/8/10/11 (64-bit)  
Linux Ubuntu (64-bit)\*  
macOS\*
- PC RAM 16GB (recommended) or 8GB at least

[\*] Free update from time to time.

\* Free update by year end 2023.

# Acute®

PC-based T&M Instruments

Acute Technology Inc.

Tel: +886-2-2999-3275 E-mail: service@acute.com.tw <http://www.acute.com.tw>



# TS3000

Model		TS3124E	TS3124B	TS3124H	TS3124V
Power	Power source	USB bus-power (+5V)			
	Static power consumption	4.5W			
	Max power consumption	7.7W			
Acquisition	Mode	Sample, Average, Envelope <sup>[*]</sup> , Peak detect <sup>[*]</sup> , High resolution <sup>[*]</sup>			
	Sampling @ 1Ch	1 GS/s		1 GS/s   500 MS/s   100 MS/s	
	@ 2Ch	500 MS/s		500 MS/s   250 MS/s   100 MS/s	
	(8   12   ≥14 bits) @ 4Ch	250 MS/s		250 MS/s   125 MS/s   100 MS/s	
	Record length @ 1Ch	512 Mpts		512 Mpts   256 Mpts	
@ 2Ch	256 Mpts		256 Mpts   128 Mpts		
@ 4Ch	128 Mpts		128 Mpts   64 Mpts		
Input	Input channels	4			
	Input coupling	AC/DC			
	Input impedance	1 MΩ    <19 pF			
	Overvoltage protection	± 100 V (DC+AC peak)			
	Ch-Ch isolation	50dB @DC to 100MHz; 40dB @ 100MHz to 200MHz			
Ch-Ch skew	100 ps between two channels with the same scale & coupling settings				
Temperature	Operating / Storage	5°C~40°C (41°F~104°F) / -10°C~65°C (14°F~149°F)			
I/O port	Trig-In	Workable : 2.5V to 5V / Typical : TTL 3.3V (Rising/Falling)			
	Trigger pulse approval	> 8 ns			
	Trig-Out	TTL 3.3 V			
	Ref. Clock input	10MHz, Vpp=3.3 to 5V			
	Ref. Clock output	10MHz, TTL 3.3V			
	Connector type	MCX jack / female			
Vertical	Bandwidth	200 MHz			
	Rise time	1.75 ns @ 200 MHz; 3.5 ns @ 100 MHz; 7 ns @ 50 MHz			
	Resolution	8 bits		8, 12, 14, 15, 16 bits	
	Input sensitivity	2 mV/div to 10 V/div (Full-Scale: ±4 div/screen, ±1 div beyond screen)			
	Offset range	±150 V @ 2, 5, 10 V/div; ±1.5 V @ 0.2, 0.5, 1 V/div; ±1.5 V @ 2, 5, 10, 20, 50, 100 mV/div			
	DC accuracy	±3% of Full-Scale			
Bandwidth limit	20 MHz, 100 MHz or Full				
Horizontal	Time scale	1 ns/div to 100 s/div (10 div/screen)			
	Time resolution	125 ps			
	Time accuracy	±10 ppm			
	Delay range	Pre-trigger: 0 to 100% of 1 screen; Post-trigger up to 50 sec.			
Trigger	Trigger mode	Auto, Normal, Single, Roll <sup>*</sup>			
	Source	Ch1, Ch2, Ch3, Ch4, Ext. (TTL only)			
	Coupling	DC, LF reject (50kHz), HF reject (50kHz), Noise reject			
	Trigger range	±4 div from window center			
	Vertical sensitivity	1 div or 5 mV @ <10 mV/div; 0.6 div @ ≥ 10 mV/div			
	Hold off range	~60 ns to 10 sec.			
	DSO I	Edge, Either, External, Falling, Rising, Video, Width			
DSO II	---	Runt, Pattern/State, Timeout, Transition, Setup/Hold, B-Trigger, B-Event, Window			
Protocol Trigger & Decode	---	BiSS-C, CAN 2.0B/CAN FD, DALI, DP_Aux <sup>[1]</sup> , HID over I2C, I2C, I2S, LIN2.2, MDIO, Mini/Micro LED, MIPI I3C 1.1.1, MIPI RFFE 3, MIPI SPMI 2, Modbus, PMBus, Profibus, SENT, SMBus, SPI, SVI2, UART, USB PD 3, USB1.1			
Protocol Decode	---	1-Wire, 3-Wire, AccMeter, APML, AVSBus, BSD, CEC, Closed Caption, CODEC_SSI, DDC(EDID), DMX512, FlexRay, HD Audio, HDLC, HDQ, HTSensor, I2C(EEPROM), IrDA, ISELED Digital RGB LED, JVC IR, LED_CTRL, M-Bus, MDDI, MHL CBUS, Microchip SWI, MICROWIRE, MIPI CSI LP, MIPI DSI LP, MIPI SoundWire, NEC IR, PCM, PDM, PECL, PS/2, PWM, QEI, QI, RC-5, RC-6, RT_SWI, S/PDIF, SDQ, Serialized IRQ, SGPIO, Smart Card (ISO7816), SMI, SSI, ST7669, SWIM, SWP, UNI/O, USB4/TBT3 SB, Wiegand			
Measurement/ Processing	Measurement	Frequency, Period, ±Duty, ±Period, Rise/ Fall Time, Delay, Phase; VMax, VMin, VHigh, VLow, Vpp, VAmp, VMid, VMean, VRMS, ±Overshoot, Rise/ Fall Preshoot, Edge Count, ±Pulse Count			
	Cursor	Time difference, Voltage difference			
	Math	+, -, x, ÷, XY,  A , √A, Log(A), Ln(A), ∫Adt, e <sup>A</sup>			
	FFT	Rectangular, Blackman, Hann, Hamming, Harris, Triangular, Cosine, Lanczos, Gaussian. (Vertical Scale: dBm RMS, dBV RMS, Linear RMS)			
Export data	WORD, EXCEL, CSV, TEXT, HTML, MATLAB				
Electrical Validation (Protocol) <sup>[*]</sup>	---	---		I2C, I2S, MIPI I3C, MIPI RFFE, MIPI SPMI, PDM, SPI, UART(RS232)	
Cascade	Max. channels expand	---	16 Ch (4x Device, 1 Master & 3 Slaves)		
	Trigger source	---	Main device only		
	Skew between Master & Slave	---	±2ns @ 1 GS/s ; ±4ns @ 500 MS/s ; ±8ns @ 250 MS/s		

[1] Optional DP\_Aux adapter needed.


[2] To measure RS422/485, need to optional the ADP high-voltage differential probe.

[\*] Free update from time to time.




## Functions :

### Multiple Devices Stack Mode :

Support DSO stack mode, up to 4 devices (16 channels) can be stacked together in the same time.

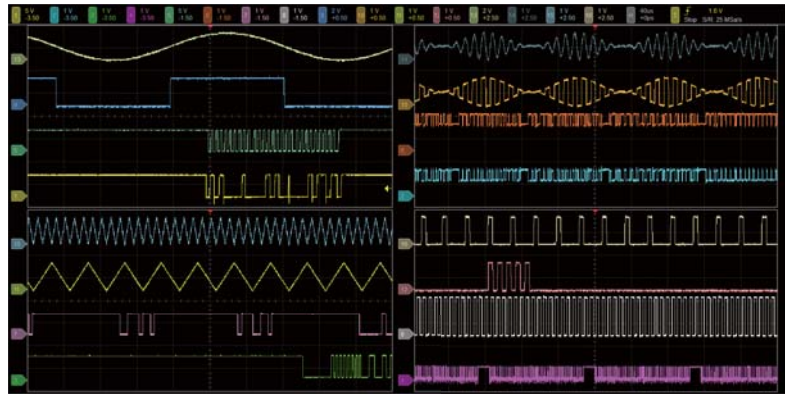

- **Runt Trigger** : Use 2 voltage thresholds and pulse width to trigger on either/  $\pm$  runt signals.
- **Timeout Trigger** : Trigger when no pulse is detected within a specified time, range from 2ns to 50s.
- **Pulse Width Trigger** : Pulse width range from 8ns to 50s.




### Vertical Offset & Zone View

Voltage division from 2mV/Div - 10V/Div combined with the channel independent Vertical Offset settings, which can be used for glitch measurement and analysis on DC power, and observing the ripple and overshooting voltage on DC offsetted voltage. It is also possible to use 16Bit high vertical resolution mode (TS3124H/V) with the Zone View feature to observe the DC voltage and ripple signal together in the same time.




### Spectrum analysis (Fast Fourier transform, FFT)

Apply FFT to the selected channel.

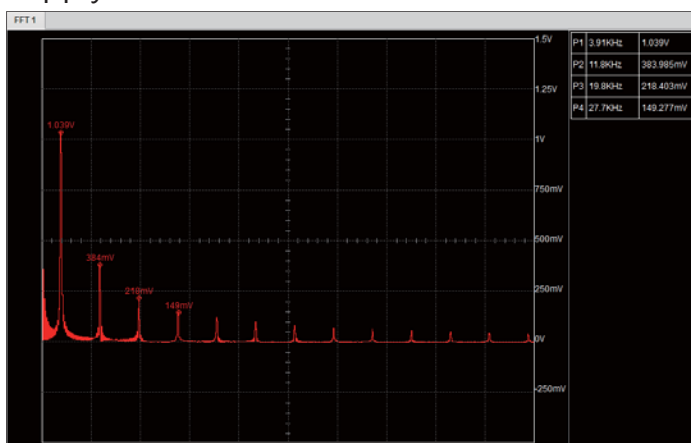

### Multiple Windows

Multiple Window feature provides 4 display types (1x1, 2x1, 1x2, 2x2), which could displays 16 channels in maximum 4 different windows, provides clear waveform readability without lower the vertical resolution.



**Measurement :**


More than 20 types of waveform measurements with customized threshold settings features, provides real-time update for vertical, time and channel to channel timing measurements with statistic features.

**Time:** Frequency, Period,  $\pm$ Duty,  $\pm$ Period, Rise/Fall Time, Delay, Phase

**Vertical:** VMax, VMin, VHigh, VLow, Vpp, VAmp, VMid, VMean, VRMS,  $\pm$ Overshoot, Rise/Fall Preshoot


**Counter:** Edge Count,  $\pm$ Pulse Count

**Math:** Add, Subtract, Multiple, Divide, XY, Absolute, Square Root, LogA, LnA, Exponential, Integral

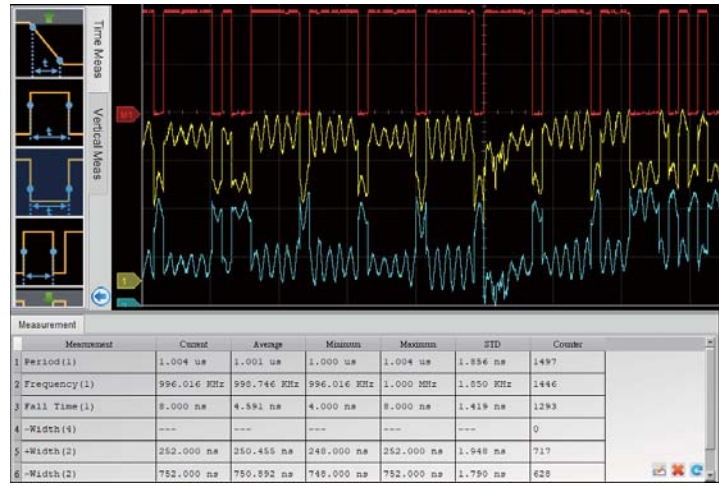


**Protocol Decode & Trigger Function**

Provides, CAN/CAN-FD, I<sup>2</sup>C, LIN, MIPI I3C 1.1.1, ProfiBus, SPI, UART(RS232), USB1.1,... protocol decode and trigger function, which is able to trigger and decode on the specified Command/Address/Data...

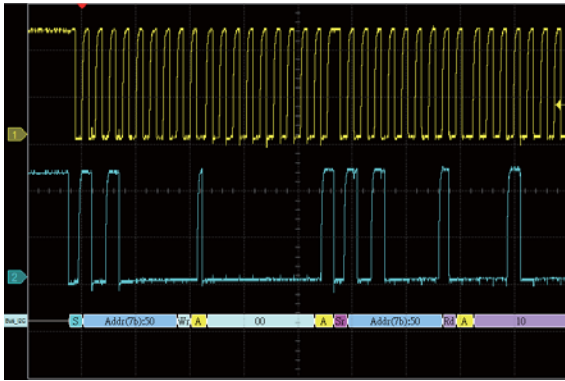

Decode the I<sup>2</sup>C waveforms

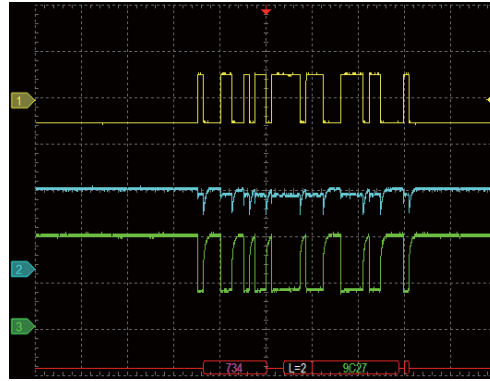


Decode the differential CAN signals with a differential probe. (CH1: Differential Probe, CH2: CAN H, CH3: CAN L)  
\* Supports CAN-FD, CAN2.0

**Digital Voltmeter (DVM) & Frequency Counter**

Provides voltage root-mean-square, voltage average and frequency counter function for the selected channel.



Measure 1 KHz, 2.5 Vpp square waveforms by the measurement function.

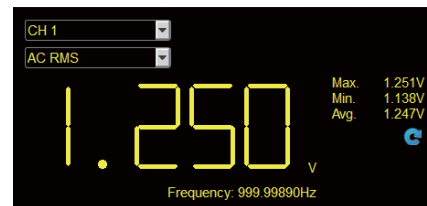

Measure 1 KHz, 2.5 Vpp square waveforms by the DVM function.

**Packing List**



Device



USB3.0 Y cable (1.8M)  
Type-C OTG Adapter



250 MHz Probe



Stack cable



Handbag