

NORIOTA



Intertek
ANSI/NSF 12



FULL DICE CUBE
2.2 x 2.2 x 2.2 cm
7/8 x 7/8 x 7/8 in



NI360F



NI360F Shown on
NIB310 Bin, Sold
Separately

NI360F COMMERCIAL MODULAR ICE MAKER, 360LB, 22 IN WIDE

FEATURES & BENEFITS

Produces up to 163 kg (360 lb) of full dice cubes per day for dependable ice availability

ENERGY STAR certified for energy-efficient operation, supporting lower day-to-day operating costs

Compact 22 in width supports substantial ice production in commercial spaces where room is limited

Vertical evaporator design produces clear full dice cube ice with consistent shape and presentation

Digital controller with advanced features, including self-cleaning mode, cleaning reminder, and screen lock supports straightforward operation and routine maintenance

Interior LED lighting supports easier viewing in low-light environments while enhancing overall presentation when installed on a matching NORIOTA ice storage bin

Automatic bin-full shut-off helps support reliable day-to-day operation


Swing-open front service panel supports easier access to water circulation components and the evaporator for cleaning and service convenience

Includes sediment water filter to help reduce incoming particle contamination and support cleaner ice machine operation

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

N O R I O T A

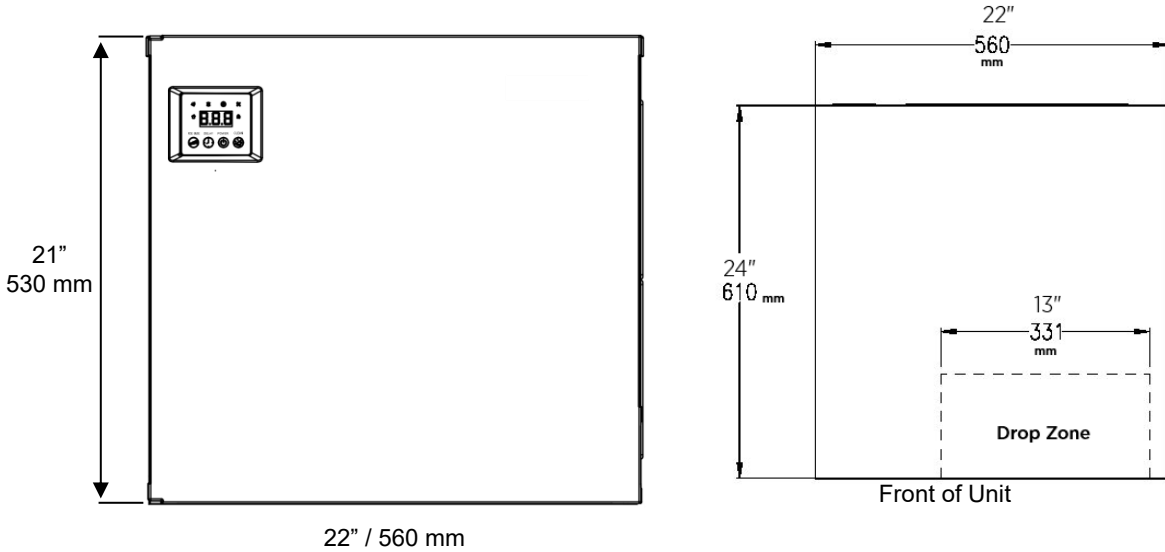

NI360F COMMERCIAL MODULAR ICE MAKER, 360LB, 22 IN WIDE

Model No.	NI360F
Ice Production Per 24Hr Air Temp. 21°C (70°F) / Water Temp. 10°C (50°F)	163 kg (360 lb)
Refrigerant	R290
Refrigerant Charge	130 g (4.59 oz)
Electrical	115 V / 60 Hz / 1 Ph, dedicated 15 A circuit
Rated Current (Ice Making / Harvest)	6.4 A / 6.8 A
Max Fuse	15 A
Voltage Range	115 V to 127 V
Power Consumption	4.81 kWh / 100 lb ice
Potable Water Use	12.3 gal / 100 lb ice
Plug Type	NEMA5-15P
Cord Length	190 cm (74.8 in)
Water Supply Line Connection	1/4 in OD water tubing
Water Pressure Range	Min 15 PSI Max 80 PSI (Above 80 requires a regulator) Min 1.0 Bar Max 5.5 Bar
Drain	19 mm (3/4 in) ID gravity drain connection required
Ambient Air Temp. Operating Range	10 °C to 38 °C (50 °F to 100 °F)
Water Temp. Operating Range	4 °C to 32 °C (40 °F to 90 °F)
Minimum Installation Clearance	150 mm (6 in) at rear and sides, and 25 mm (1 in) at top
Installation Type	Free-standing
Unit Dimensions	56.0 x 61.0 x 53.0 cm (22 x 24 x 20.9 in)
Unit Weight	44 kg (97 lb)
Shipping Dimensions	66.3 x 69.1 x 62.7 cm (26.1 x 27.2 x 24.7 in)
Shipping Weight	49.1 kg (108 lb)
Warranty	2 years parts & labour, 5 years compressor parts only
Includes	Ice scoop, tubing for water supply and drain connection, inline sediment water filter, condenser air filter

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

June 2026

All specifications subject to change without notice.