

# NORIOTA



Intertek  
ANSI/UL 471



Intertek  
ANSI/NSF 7



## NR49

### FEATURES AND BENEFITS

- **201 Stainless Steel Interior (Floor, Walls, Ceiling):** Provides durable corrosion resistance, strong resistance to dents and deformation, and smooth surfaces that are easier to clean in daily commercial use.
- **Ventilated Cooling System:** Circulates cold air throughout the cabinet to support more even temperature distribution.
- **Solid Door with Self-Closing Hinges:** Helps reduce unnecessary temperature loss by encouraging the door to return closed after use.
- **Heavy-Duty Adjustable Shelves:** White coated wire shelves support up to 50 kg (110 lb) each for flexible storage of heavy commercial product loads.
- **Digital Temperature Control & Display:** Enables accurate temperature monitoring, easy adjustments, and includes high-temperature and door-open alarms for added protection and operational awareness.
- **Full-Perimeter Magnetic Door Gaskets:** Creates a tight seal to lock in cold air and maintain optimal internal temperature.
- **Efficient LED Interior Lighting:** Delivers bright, low-heat illumination for quick and easy product identification.
- **R290 Refrigerant:** Uses environmentally friendlier hydrocarbon refrigerant with low environmental impact.


NR49 REACH-IN REFRIGERATOR, 2 SOLID DOORS

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

# NORIOTA

## NR49 REACH-IN REFRIGERATOR, 2 SOLID DOORS

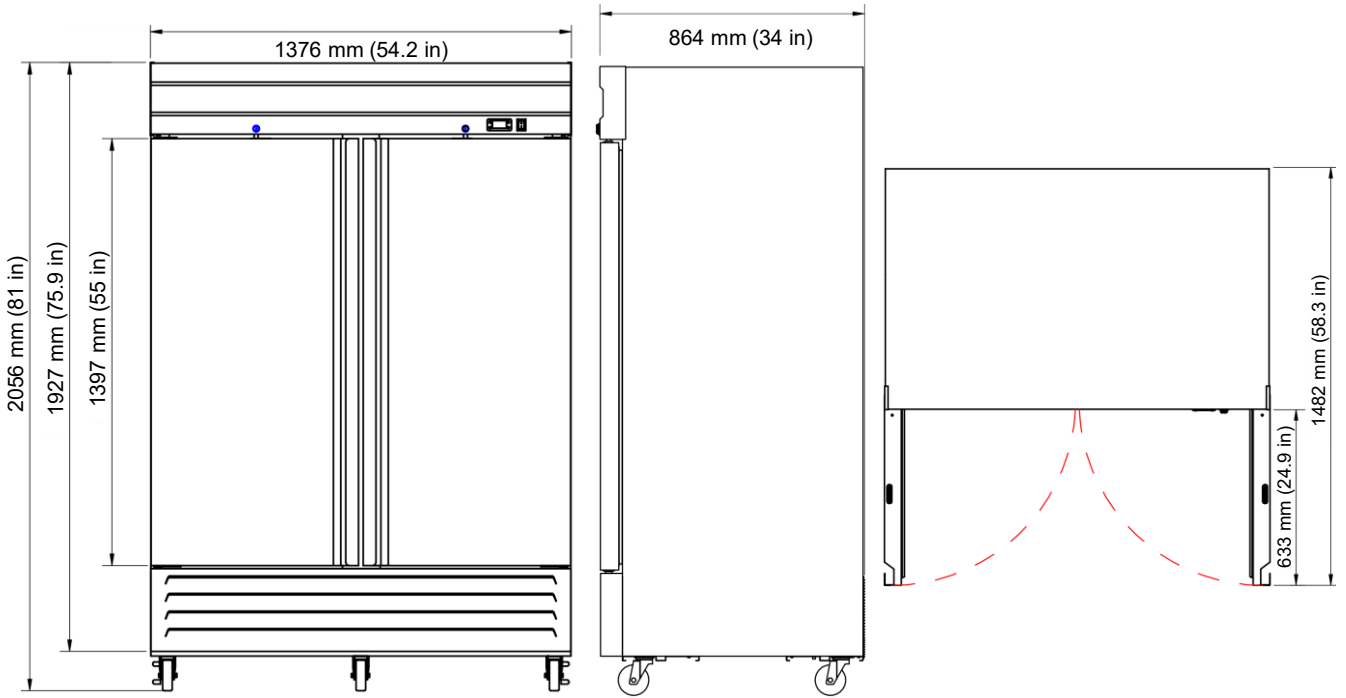

|                                    |   |
|------------------------------------|---|
| <b>Model No.</b>                   | <b>NR49</b>   |
| <b>Net Storage Capacity</b>        | 1191 L (42.06 CuFt)                                   |
| <b>Doors / Shelves</b>             | 2 Doors, 6 Shelves                                    |
| <b>Holding Temperature</b>         | 1 °C to 5 °C (33 °F to 41 °F)                         |
| <b>Defrost</b>                     | Automatic   |
| <b>Refrigerant</b>                 | R290 (62 g)   |
| <b>Compressor Location</b>         | Bottom Mounted  |
| <b>Shelf Size</b>                  | 54 x 64.8 cm (21.3 x 25.5 in)                         |
| <b>Shelf Weight Capacity</b>       | 50 kg (110 lb)  |
| <b>Electrical</b>                  | 115V / 60Hz / 1Ph / 3.1 A                             |
| <b>Power Input</b>                 | 305 W   |
| <b>Power Consumption</b>           | 3.0 kWh/day   |
| <b>Plug Type</b>                   | NEMA5-15P   |
| <b>Cord Length</b>                 | 250 cm (98.4 in)                                      |
| <b>Interior Lighting</b>           | LED Lighting  |
| <b>Door Style</b>                  | Swing   |
| <b>Door Type</b>                   | Solid   |
| <b>Lock and Keys</b>               | Yes   |
| <b>Installation Type</b>           | Freestanding  |
| <b>Product Dimensions</b>          | 137.6 x 86.4 x 205.6 cm (54.2 x 34 x 81 in)           |
| <b>Product Internal Dimensions</b> | 125.2 x 73.5 x 130.5 cm (49.3 x 28.9 x 51.4 in)       |
| <b>Product Weight</b>              | 154 kg (339.5 lb)                                     |
| <b>Shipping Dimensions</b>         | 142 x 91 x 209 cm (55.9 x 35.8 x 82.3 in)             |
| <b>Shipping Weight</b>             | 202.5 kg (446.4 lb)                                   |
| <b>Warranty</b>                    | 2 years parts & labour, 5 years compressor parts only |