



## User Guide

# MANTLE

---

The creators of beautiful, sustainable lighting.

Discover the full Tala family at [tala.co.uk](https://tala.co.uk)

---

### PREPARATION

Please read instructions thoroughly before installation and keep them for future reference.

Improper assembly can undermine the safety and longevity of the product.

### IMPORTANT

All packaging must be removed before turning on.

The product is designed to work with the Tala Mantle bulb provided. Do not use alternative bulb as product will not work effectively. For replacements, visit the Tala website or contact us for assistance.

Avoid turning on product in hot temperatures above 40°C. Doing so will reduce lumen output and bulb lifespan.

### WARNING

Mantle is not suitable for recessed or enclosed fixtures or environments, and should be displayed as instructed.

Do not leave the product under direct sunlight while switched on.


Ensure bulb is fully installed and base is sealed before exposing to damp environments and do not allow internal components and surfaces to be exposed to water.

---


SKU - MTL-R80-STN-PBL-01

SKU - MTL-R80-GRG-PBL-01



SKU - MTL-R80-COB-PBL-01

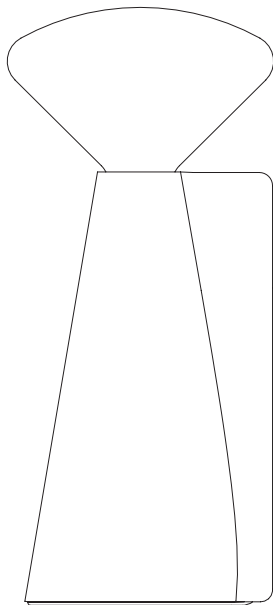



# Mantle - Provided Components

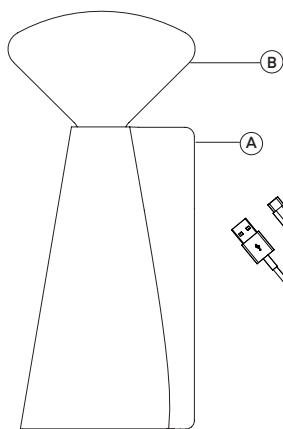

- Ⓐ x1 Mantle Luminaire
- Ⓑ x1 LED light source
- Ⓒ x1 USB Type-C charging cable
- Ⓓ x1 USB-C dust cap (Optional)



- ① USB Type-C power input
- ② Battery charge level indicator
- ③ Dimmer button

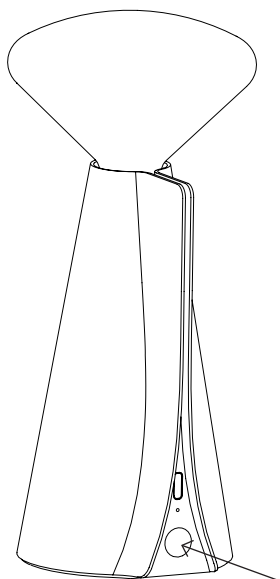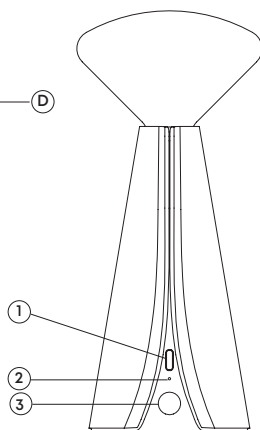

## OPERATION


Press the dimming button to turn the lamp on.

Press and hold to dim the light up or down.

Change the lamp into three-step dimming mode by holding the dimmer button pressed for 10 seconds.

The lamp can now be dimmed up in three-step increments by pressing the dimmer button.

## CHARGING

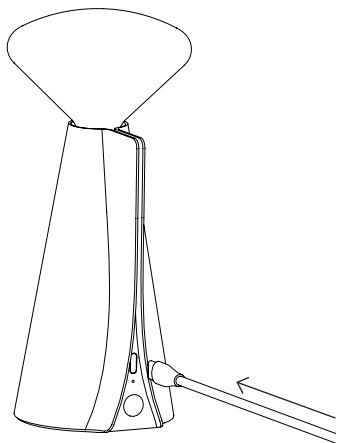


Insert the provided USB Type-C charging cable into the input at the back of the luminaire base and plug into a USB Type-A adapter.

For optimum charging, use the 1m charging cable provided and a 1.7 Amp USB Type-A adapter. Compatible with other chargers that provide at least 1.7A and 5V.

When charging correctly the battery indicator will illuminate red until fully charged.

Total charging time is 4 hours.

## BATTERY LEVEL INDICATOR

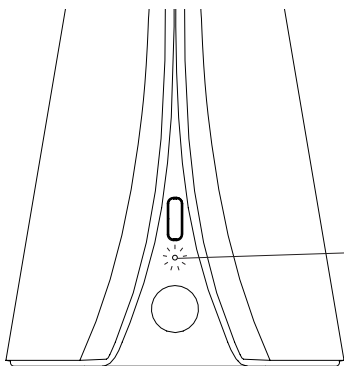

When the dimmer button is interacted with, the battery indicator light will illuminate to show the current battery level.



Green

3 Flashes : >75% Battery remaining

2 flashes : >50% Battery remaining

1 flash : >25% Battery remaining



Red

1 flash : <25% Battery remaining

Solid/ Constant on: <5% Please recharge

## IMPORTANT

Tips to prolong the battery life are:

- Once fully charged, please remove from charger
- Avoid allowing the battery to reach 0%. Recharge when the low-battery indicator begins to blink
- When not in use, store Mantle with 25-50% battery (1 Green Flash)
- During charge, make sure Mantle is uncovered to avoid over-heating

The battery and light source can all be easily replaced. For replacement parts, please visit our website or contact us at [customerservice@tala.co.uk](mailto:customerservice@tala.co.uk).

## CARE AND CLEANING

We recommend cleaning with a soft dry cloth. If required, further cleaning can be achieved with warm, soapy water. Do not use abrasive materials as these will damage the finish of the product. Do not use alcohol or other solvents.

## WARRANTY AND AFTER-CARE

This product has a two-year warranty. If there appears to be a functional defect with the product during this time, please contact our team at [customerservice@tala.co.uk](mailto:customerservice@tala.co.uk).

---

### MANTLE LAMP

Ø80 x 180mm  
IP44 | Suitable for wet locations  
5V/1.7A USB Type-C  
Battery: Li-ion 5000mAh 3.7V 18.5Wh  
Ta max. 40°C  
Only use with Tala Mantle light sources


### BATTERY LIFE

Continuous dimming  
Max brightness (200lms): 6 hrs  
Min brightness (20lms): >24 hrs  
Three-step Dimming  
Step 1 (75lms) - 24hrs  
Step 2 (140lms) - 11hrs  
Step 3 (200lms) - 6hrs

### LIGHT SOURCE

18V | 3W | 200lm  
CRI 97 | 2200K  
Ø80 x 85mm | Flicker <5%

---

This symbol  indicates that electrical and electronic equipment (WEEE) should not be mixed with general household waste.

For recovery and recycling, please take this product to a designated collection point where it will be accepted free of charge. Many retailers offer this instore. Disposing of this product correctly will help save valuable resources and prevent any potential negative effects on human health and the environment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: —Reorient or relocate the receiving antenna. —Increase the separation between the equipment and receiver. —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. —Consult the dealer or an experienced radio/TV technician for help. Caution; changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Join the Community

Instagram: @tala | Facebook: talaHQ | Pinterest: TalaLED | Tag: lighttoliveby  
Tala Energy Ltd, 25B Vyner Street, London, UK, E2 9DG | [hello@tala.co.uk](mailto:hello@tala.co.uk)  
Tala Europe B.V, Bertus Aafjeshove 40, Nieuwegein 3437JN, Netherlands  
Tala North America Inc, 909 Rose Avenue, Suite 660, North Bethesda, MD 20852, USA