
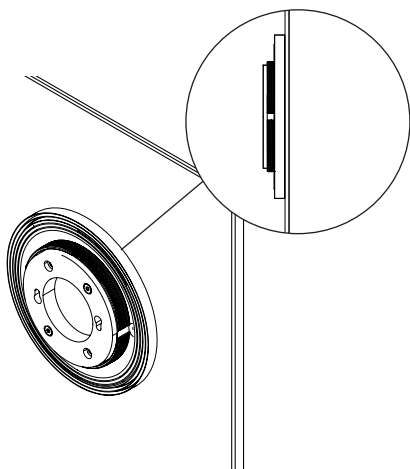


Firth Wall Light - Installation on a mirror

Mirror hole = $\varnothing 100\text{mm}$.

Ensure the mounting screws and power cable can be installed into a solid wall behind the mirror.

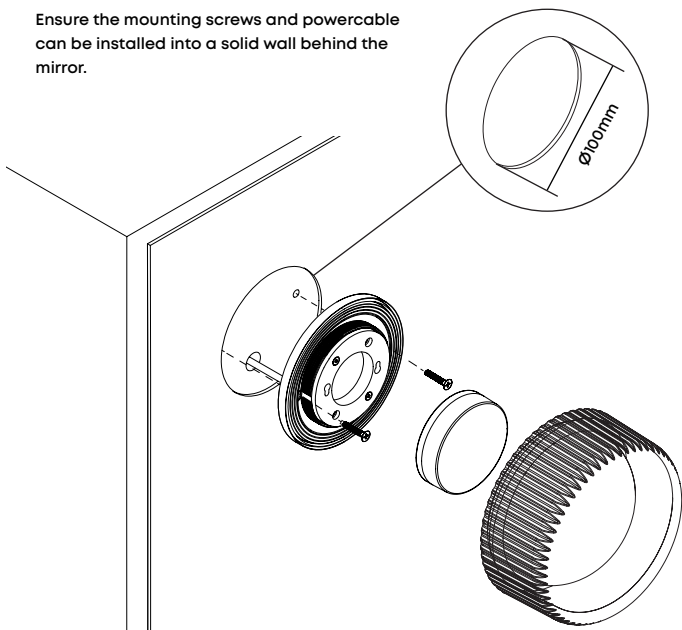

Ensure the silicone gasket is fully sealed flush against the mirror surface to prevent water and humidity ingress.

Gasket diameter = $\varnothing 120\text{mm}$