

NORIOTA



Intertek
ANSI/UL 197
CAN/CSA-C22.2
No. 109



Intertek
ANSI/NSF 4



NHP36C

FEATURES & BENEFITS


- **36 Full-Size Sheet Pan Capacity** supports high-volume proofing and heated holding while maintaining a compact footprint.
- **Dual Heat and Proof Modes** provide both dough proofing and heated holding functions, helping maximize equipment versatility and kitchen space.
- **Non-Insulated Cabinet Design** provides a lightweight, economical solution for proofing and heated holding applications.
- **Forced-Air Circulation System** helps distribute heat and humidity more evenly across multiple pan levels for more consistent proofing and holding results.
- **Adjustable Humidity Control** supports a wide range of proofing applications and product requirements.
- **Adjustable Temperature Control** allows operators to tailor cabinet conditions for proofing and heated holding.
- **Digital Temperature Display** provides an easy-to-read cabinet temperature reference during proofing and heated holding operations.
- **Clear Visibility Door** allows operators to monitor product condition without repeated door openings that can release heat and humidity.
- **Mobile Cabinet Design** features four large 152 mm (6 in) castors, including two locking castors, plus rear cord storage and protective corner bumpers to help move loaded cabinets more easily through busy commercial kitchens.
- **Removable Control Drawer** simplifies cleaning access and routine maintenance while keeping operating components easy to service.

NHP36C HEATED PROOFING AND HOLDING CABINET, NON-INSULATED

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

NORIOTA

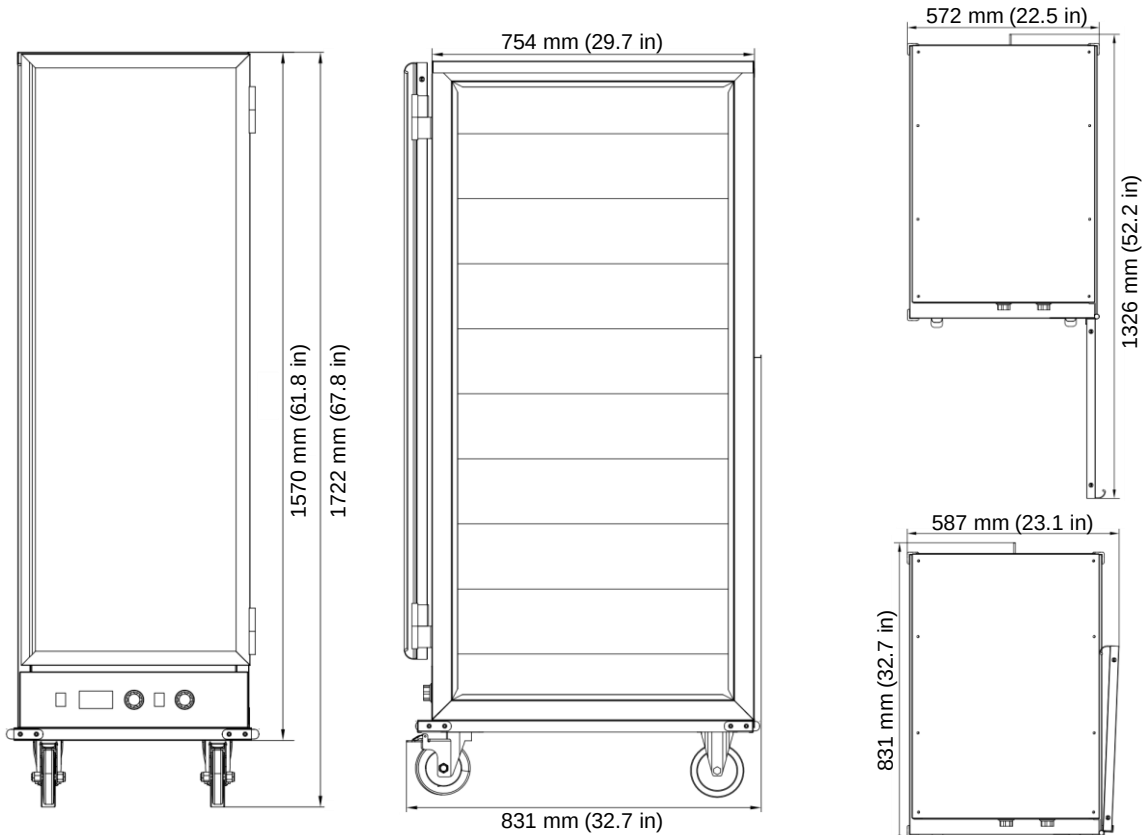

NHP36C HEATED PROOFING AND HOLDING CABINET, NON-INSULATED

Model No.	NHP36C
Cabinet	Anodized aluminum cabinet
Pan Capacity	36 full-size sheet pans
Pan Spacing	38 mm (1.5 in)
Door Configuration	Clear Lexan door
Door Swing	Field-reversible (optional left-hand hinge kit required)
Proofing Temperature Range	Ambient to 46 °C (115 °F)
Holding Temperature Range	Up to 80 °C (180 °F)
Humidity Range	30% to 95%
Electrical	115 V / 60 Hz / 1 Ph
Rated Current	12.5 A
Power Consumption	1500 W
Plug Type	NEMA 5-15P
Power Cord Length	190 cm (74.8 in)
Installation Type	Freestanding mobile cabinet
Castors	Four 152 mm (6 in), two locking
Unit Dimensions	57.2 x 83.1 x 172.2 cm (22.5 x 32.7 x 67.8 in)
Unit Weight	47.9 kg (105.5 lb)
Shipping Dimensions	58 x 86.5 x 175.3 cm (22.8 x 34.1 x 69 in)
Shipping Weight	62.7 kg (138.3 lb)
Warranty	2 years parts & labour

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

All specifications subject to change without notice.

June 2026