

# NORIOTA



Intertek  
ANSI/UL 197  
CAN/CSA-C22.2  
No. 109



Intertek  
ANSI/NSF 4



## NCCOH

## NCCOH COUNTERTOP CONVECTION OVEN

### FEATURES & BENEFITS



- **Spacious Interior Cooking Chamber:** Provides 46 x 36.8 x 34.8 cm (18.1 x 14.5 x 13.7 in) of internal space and fits four 43.5 x 31.5 cm (17.1 x 12.4 in) pans for higher-volume baking, roasting, and finishing applications.
- **Dual Convection Fans** help move heated air across multiple rack positions for more even cooking, browning, and recovery during repeated use.
- **570 °F Maximum Temperature** gives operators a wider cooking range for baking, roasting, crisping, and high-temperature finishing.
- **240 V Power Connection** requires a NEMA 6-20P plug to support 2800 W heating output and strong temperature recovery during commercial cooking.
- **120-Minute Timer** supports timed cooking cycles and helps operators manage repeatable batches during busy service periods.
- **Mechanical Thermostat Control** gives operators simple, familiar temperature control without complex programming or digital menus.
- **Interior Oven Light** improves visibility so operators can check product colour and progress without opening the door as often.
- **Drop-Down Glass Door** provides clear product visibility and convenient loading access for half-size pans and racks.
- **Four Adjustable Racks** let operators change rack positions for different product heights, batch sizes, and cooking requirements.
- **Compact Countertop Design** delivers half-size pan capacity in a countertop footprint for kitchens with limited floor space.
- **ETL Sanitation Certified** supports use in commercial foodservice environments requiring certified safety and sanitation compliance.

NORIOTA

[www.noriota.ca](http://www.noriota.ca) | [support@noriota.ca](mailto:support@noriota.ca) | 1-877-NORIOTA

# NORIOTA

## NCCOH COUNTERTOP CONVECTION OVEN

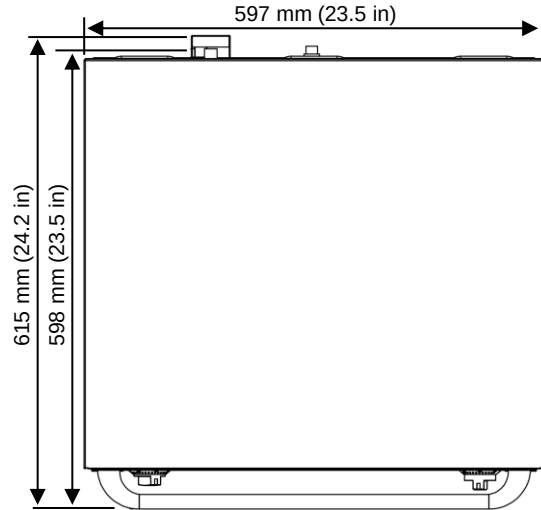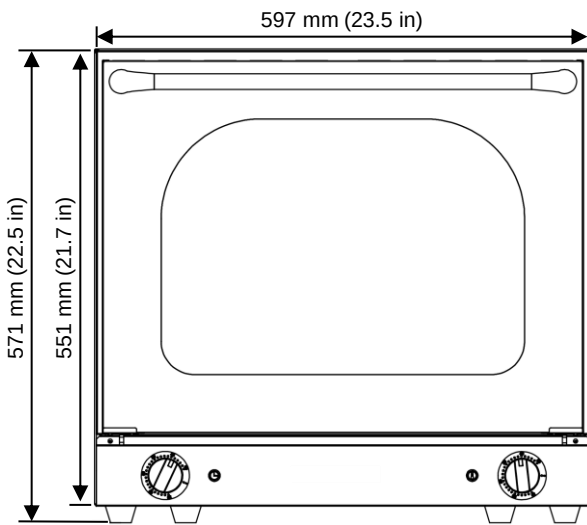

| Model No.                       | NCCOH                                                           |
|---------------------------------|-----------------------------------------------------------------|
| Included Racks                  | 4 adjustable racks                                              |
| Internal Dimensions (W x D x H) | 46 x 36.8 x 34.8 cm (18.1 x 14.5 x 13.7 in)                     |
| Usable Cooking Area (W x D x H) | 43.9 x 36.8 x 34.8 cm (17.3 x 14.5 x 13.7 in)                   |
| Compatible Pan Size             | 43.5 x 31.5 cm (17.1 x 12.4 in)                                 |
| Convection Fans                 | 2                                                               |
| Interior Light                  | Yes                                                             |
| Control Type                    | Mechanical thermostat                                           |
| Temperature Range               | 49 °C to 299 °C (120 °F to 570 °F)                              |
| Timer                           | 0-120 minutes                                                   |
| Cabinet Construction            | SUS430 stainless steel, aluminized steel, and cold rolled steel |
| Door Type                       | Drop-down glass door                                            |
| Electrical                      | 240 V / 60 Hz / 1 Ph                                            |
| Rated Current                   | 11.7 A                                                          |
| Power Consumption               | 2800 W                                                          |
| Plug Type                       | NEMA 6-60P                                                      |
| Required Electrical Outlet      | NEMA 6-20R (240 V)                                              |
| Power Cord Length               | 149.9 cm (59 in)                                                |
| Installation Type               | Countertop                                                      |
| Required Clearance              | 305 mm (12 in) top, rear, and sides                             |
| Unit Dimensions (W x D x H)     | 59.7 x 61.5 x 57.1 cm (23.5 x 24.2 x 22.5 in)                   |
| Unit Weight                     | 39.9 kg (88 lb)                                                 |
| Shipping Dimensions (W x D x H) | 64.8 x 63.2 x 63.5 cm (25.5 x 24.9 x 25 in)                     |
| Shipping Weight                 | 42.6 kg (94 lb)                                                 |
| Warranty                        | 2 years parts & labour                                          |

NORIOTA