

NORIOTA

NCCOQ COUNTERTOP CONVECTION OVEN, QUARTER SIZE



NCCOQ



FEATURES & BENEFITS

- **(3) Quarter-Size Pan Capacity** supports baking, roasting, reheating, and finishing applications while maintaining a compact countertop footprint.
- **Convection Airflow System** uses fan-forced air circulation to help promote more consistent cooking throughout the oven cavity.
- **Wide Temperature Range** adjusts from 66 °C to 232 °C (150 °F to 450 °F) to support a variety of commercial cooking applications.
- **Mechanical Thermostat Control** allows operators to set and maintain cooking temperatures using simple, familiar controls.
- **120-Minute Timer** provides adjustable cooking control with an easy-to-use mechanical timer.
- **Large Viewing Window** in the drop-down glass door to monitor product progress without frequent door openings.
Three Adjustable Racks provide flexible rack positioning to accommodate different products and cooking requirements.
- **Quarter-Size Cooking Area** provides 33 x 30.2 cm (13 x 11.9 in) of usable cooking space per rack for everyday commercial cooking tasks.
- **Compact Countertop Design** delivers quarter-size convection oven capacity while helping conserve valuable workspace.
- **ETL Sanitation Certified** meets commercial safety and sanitation standards for professional foodservice environments.

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

NORIOTA

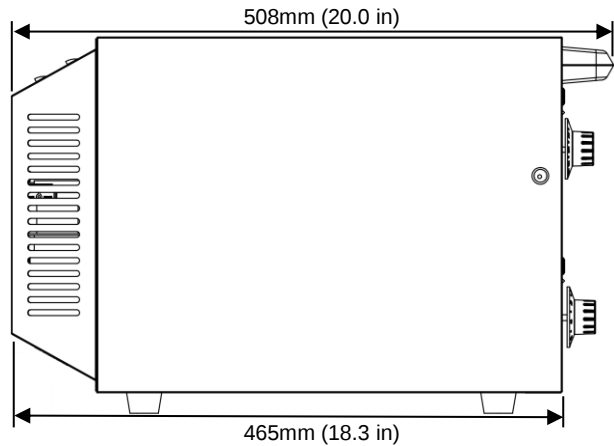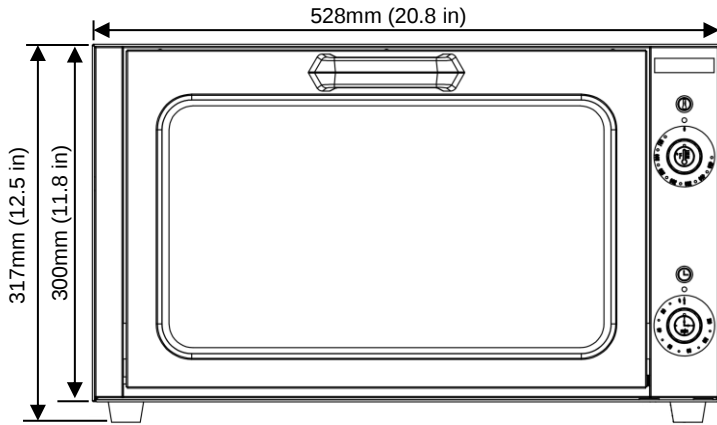

NCCOQ COUNTERTOP CONVECTION OVEN, QUARTER SIZE

Model No.	NCCOQ
Capacity	(3) Quarter-size sheet pans
Included Racks	3 adjustable racks
Internal Dimensions (W x D x H)	40.6 x 30.2 x 25.1 cm (16 x 11.9 x 9.9 in)
Usable Cooking Area (W x D x H)	33 x 30.2 x 25.1 cm (13 x 11.9 x 9.9 in)
Control Type	Mechanical thermostat
Temperature Range	66 °C to 232 °C (150 °F to 450 °F)
Timer	0-120 minutes
Cabinet Construction	SUS430 stainless steel, aluminized steel, and cold rolled steel
Door Type	Drop-down glass door
Electrical	120 V / 60 Hz / 1 Ph
Rated Current	14.6 A
Power Consumption	1750 W
Plug Type	NEMA 5-20P
Installation Type	Countertop
Required Clearance	305 mm (12 in) top, rear, and sides
Unit Dimensions (W x D x H)	52.8 x 50.8 x 31.7 cm (20.8 x 20 x 12.5 in)
Unit Weight	21.9 kg (48.3 lb)
Shipping Dimensions	59.9 x 55.9 x 39.9 cm (23.6 x 22 x 15.7 in)
Shipping Weight	24.0 kg (52.9 lb)
Warranty	2 years parts & labour

NORIOTA

www.noriota.ca | support@noriota.ca | 1-877-NORIOTA

All specifications subject to change without notice.

June 2026