

lamber® **DSP4EKDPS**



This professional under counter dishwasher is capable of delivering up to 600 dishes per hour with 4 operation cycles that ensure clean and sanitized dishes. The compact stainless steel design makes it ideal for commercial kitchens that require reliable and long-lasting performance during service hours.

FEATURES

- Exclusive DPS model equipped with top rotating rinse arm provides thorough water coverage for improved cleaning performance.
- Built-in drain pump enables flexible installations where gravity drainage is not available.
- Thermostatic control system maintains the selected wash and rinse temperatures throughout every cycle.
- Features like automatic tank loading, soft start, and integrated soap and rinse pumps reduce manual tasks.



PARTS AND
LABOR



SPECIFICATIONS

Power:	3550 W – 208 V – 1 PH – 60 Hz – 17 A
Clearance:	12.6" (32 cm)
Rack dimensions:	19.6" x 19.6" (50 cm x 50 cm)
Work height:	15.3" (38 cm)
Tank capacity:	4 gal (15 L)
Wash cycle duration:	2 - 3 - 4 - 15 min.
Wash cycle capacity:	30/20/15/4 baskets/h
Water consumption per cycle:	0.6 gal (2 L)
Electric pump:	550 W
Wash tank element:	2000 W
Rinse tank element:	3000 W
Boiler capacity:	1.32 gal (5 L)
Water inlet temperature:	131 ÷ 140 °F (55 ÷ 60 °C)
Water inlet connection:	3/4" G
Water outlet connection:	32 mm / 3/4"
Inlet water pressure:	40 ÷ 80 psi
Water hardness:	7.2 ÷ 12.5 °F (-13 ÷ -10 °C)
Rinse temperature:	180 ÷ 195 °F (82 ÷ 90 °C)
Noise level:	< 70 dB (A)
Dimensions:	
	Length: 25.6" (65 cm)
	Width: 23.7" (60 cm)
	Height: 32.2" (81 cm)

Connection:




(208/240 V)


Net weight: 136 lb (62 kg)



LEFT VIEW

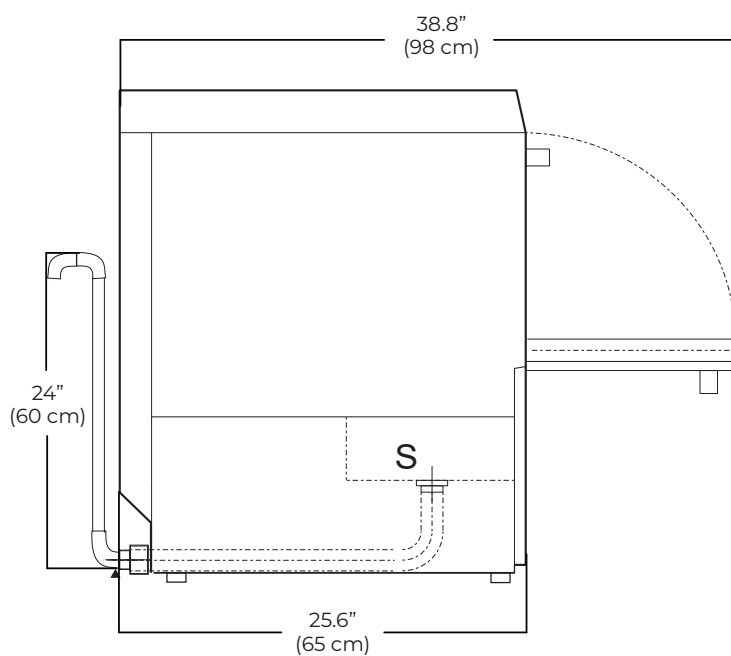

FRONTAL VIEW

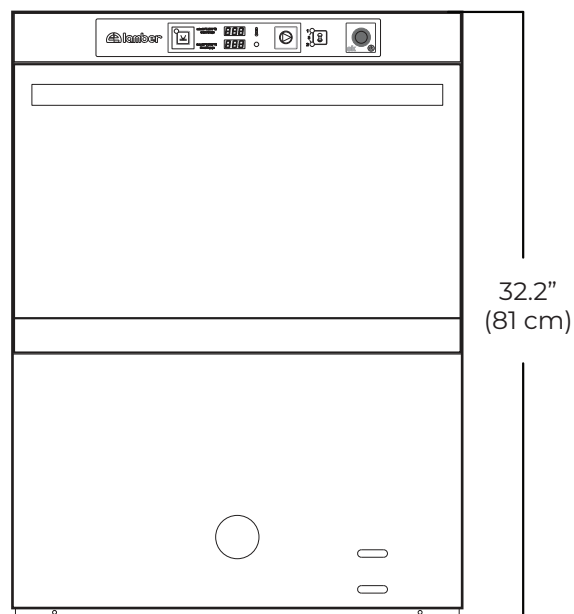

TOP VIEW

