



Westinghouse

INNOVATION YOU CAN BE SURE OF

WPX3200

PRESSURE WASHER

The new Westinghouse WPX3200 pressure washer has 3,200 psi of muscle to blast away the toughest dirt and grime from your outdoor cleaning jobs. With up to four times the area cleaning performance of mains electric-powered pressure washers, this petrol-powered cleaner can save you both time and water while being easy and safe to use.

Features and Benefits

Reliable Performance

High output, fuel efficient, 4-stroke Westinghouse OHV petrol engine.

Premium Features

Axial cam pressure pump, 5 spray nozzles and built-in 1.9 litre detergent tank.

Simple Operation

Easy to use quick-change spray nozzles and colour-coded touch points.

Ergonomic

Endura-Grasp™ high pressure spray gun with 7.6 metre abrasion resistant hose.

Portable

Waist height sure-grip handle and Never-Flat all terrain wheels for manoeuvrability.

Safety Protection

Spray gun handle with trigger safety lock. Low engine oil level shutdown system.

Plug & Play

Just add petrol, detergent and connect to water. All other requisites included.

Buy With Confidence

2-year domestic use warranty coverage (conditions apply).


3200 PSI
PRESSURE

9.5 L/MIN
FLOW RATE

70 M²/H
CLEANING *



Cleaning Applications

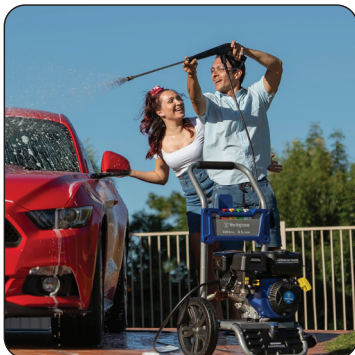

5 Quick-Change Spray Nozzles

RED	YELLOW	GREEN	WHITE	BLACK
Intense Cleaning	Strong Cleaning	Moderate Cleaning	Gentle Cleaning	Low Pressure Detergent
0°	15°	25°	40°	60°


* Indicative cleaning performance for comparison based on rated water pressure and flow rate.

Power - when you need it - where you need it

Specifications

WPX3200

ENGINE		SPRAY GUN AND LANCE	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled	Spray Gun	Trigger Control with Safety Lock
Cast Iron Sleeve	Yes	Lance	533 mm Long, Stainless Steel
Displacement (cc)	212	SPRAY NOZZLES	
Speed (rpm)	3,600	Spray Pattern	0°, 15°, 25° & 40° Wash 60° Detergent
Oil Capacity (mL)	600	Inlet Connector	PWMA ¼" Quick Connect Coupler Plug
Oil Grade	SAE 10W-30	HIGH PRESSURE HOSE	
Low Oil Shutdown	Yes	Working Pressure (bar / psi)	234 / 3,400
Spark Plug	Torch F7RTC	Length (m)	7.62
Fuel	Unleaded Petrol	Connectors	PWMA M22 Threaded Plug Collars
Fuel Tank Capacity (L)	3.3	DETERGENT TANK	
Starting Method	Recoil	Capacity (L)	1.9
Exhaust Emissions Certification	US EPA and Australia	Tethered Cap	Yes
EMC Certification	EN 55012 and EN 61000	FRAME AND WHEELS	
WATER PUMP		Frame Construction	32 mm Steel Tube
Pump Type	3-Piston, Axial Cam, Direct-Drive	Wheels	305 mm Never-Flat All Terrain
Pump Construction	Stainless Steel Pistons, Aluminium Head and Casing	DIMENSIONS	
Maximum Pressure (bar / psi)	221 / 3,200	Width (mm)	535
Maximum Flow Rate (L/min)	9.5	Depth (mm)	495
Cleaning Rate (m²/h) *	70	Height (mm)	990
Detergent Injection	On Demand, 1:20 Detergent to Water	WEIGHT	
Inlet Connector	12 mm Snap-On Garden Hose Plug	Weight - Dry (kg)	28
Outlet Connector	PWMA M22 Threaded Receptacle	Weight - Wet (kg)	33

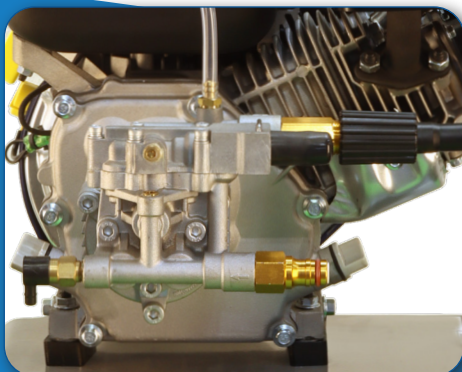

Included Accessories

