

FURRION

AC/DC WALL MOUNT
DISTRIBUTION PANEL

FDP12WA-BL



USED WITH FURRION CONVERTER
(FCVSDC60A/FCVSDC80A)




EASY INSTALLATION

- AC and DC distribution center with max 30A/12V 15 DC distribution and 12 AC branch circuits
- Easy installation and uninstallation of AC wiring string relief

- Simple minimalist design
- Can be used with Furrion FCVSDC60A/ FCVSDC80A 12V series converter



FDP12WA-BL | AC/DC WALL MOUNT DISTRIBUTION PANEL

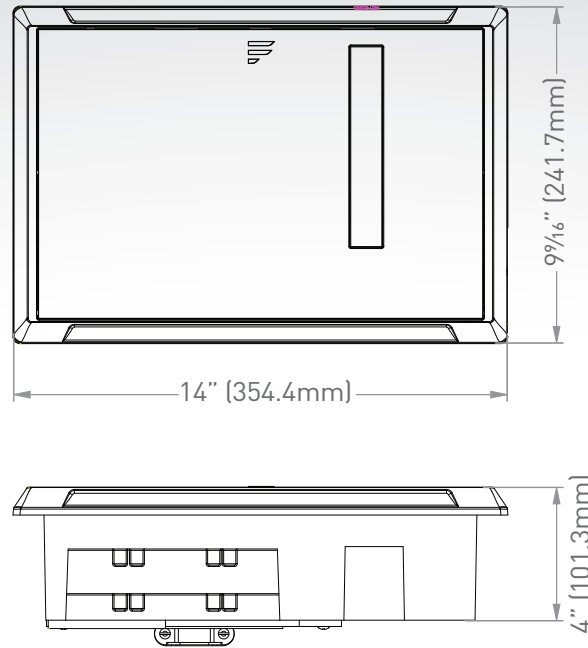

Specifications

System Voltage	Input 120Vac 30Amp or 240Vac 50Amp.
AC Distribution	Max. 12 branches (7 for 30A main; 12 For 50A main)
AC Main Breakers	30Amp or 50Amp x2
AC Receptacle	5-20R 120V 20A receptacle
DC Circuits (Total)	15DC outputs (30Amp x2CH, 20Amp x13CH)
DC Terminal bar	Built-in negative battery terminal
Fuse Status Indicator LED	The LED is no light when Fuse is in good condition, it will light with RED when fuse is broken.
Certification	UL67 and FCC Part 15B

Dimensions

Rough Opening (L x H x W)	12 ³ / ₁₆ " x 8 ³ / ₁₆ " x 3"
Larger Door Assembly (L x H x W)	13 ⁷ / ₁₆ " x 11 ¹ / ₄ "

Packaging Information

Packaging Type	Brown box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	14 ⁹ / ₁₆ " x 5 ¹¹ / ₁₆ " x 10 ⁷ / ₁₆ " (370 x 145 x 265 mm)
Individual Packaging Gross Weight (kg/lbs)	
Individual Packaging Net Weight (kg/lbs)	

Master Carton

Packaging Type	Master carton box
Quantity Per Box (pcs)	4
Master Carton Dimensions (W x H x D)	20 ¹ / ₁₆ " x 12 ³ / ₁₆ " x 15 ³ / ₁₆ " (525 x 310 x 385 mm)
Master Carton Gross Weight (kg/lbs)	
Master Carton Net Weight (kg/lbs)	

* Note: "V"=Equipped