

# Palla Compasso

Designed by **Franco Mireni** (Registered)



## Body

Track mounted spotlight with light-head and mounting arm in cast aluminium.

Available with three circuit universal track adapter or Dali track adapter. Include transparent safety cover to protect the led source accessible through a twist and lock front bezel. Available in three different sizes.

Versatile aiming angle tiltable vertically 0°-90° in two directions and rotatable horizontally 360°.

## Accessories

Honeycomb louvre, anti-glare hood, snoot and visor. Snap System™ accessories available for SORAA SLC series with narrow beam angle.

## Finish

Powder coat in black and white colour.

## LED sources

Citizen CLU Series. Xicato Artist, Beauty and Designer Series. SORAA SLC Optical Light Engine. CRI: 90, 95, 98 | CCT: 2700K, 3000K, 4000K. Other CRI and CCT options, Tuneable White and DimToWarm versions available on request.

## Optic

Lens. Narrow, medium and wide beam angle available.

## Driver

Track adaptor inclusive of integrated no-dimable driver. Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.

## Applications

Semi-spherical design for the purpose to meet the highest requirements of the latest advance in lighting technology. Great for wallwashing to illuminate vertical surface and upper area of wall.

Application areas: retail, museums, hospitality, offices.

## Related Products

**Palla In & Out Recessed**  
P.28



**Palla Surface**  
P.182



**Palla Pendant**  
P.224




# Palla Compasso



## Palla Compasso 70 / 100 / 130

Track

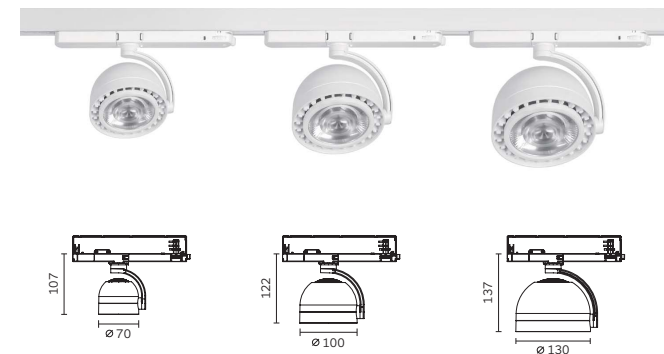

Code ordering example: **6 3 3 1 B C 2 2 - 9 0 3 0 1 6 D 0 1 0**

|                          | Product Code | Light Source Code* | >CRI      | CCT**           | LED Power | Nominal Lumen | Beam Angle (BA°)    | Driver Options     | Finish            |
|--------------------------|--------------|--------------------|-----------|-----------------|-----------|---------------|---------------------|--------------------|-------------------|
| Palla Compasso 70 Track  | <b>6331</b>  | <b>BC22</b>        | <b>90</b> | <b>30</b> 3000K | 12W       | 1500 lm       | <b>16 / 25 / 36</b> | <b>D0</b> No Dim   | <b>10</b> ■ Black |
|                          |              |                    |           | <b>40</b> 4000K |           | 1550 lm       |                     | <b>DA</b> Dali Dim | <b>11</b> □ White |
| Palla Compasso 100 Track | <b>6332</b>  | <b>BC33</b>        |           |                 | 21W       | 2200 lm       | <b>15 / 24 / 38</b> | <b>DC</b> CASAMBI  |                   |
|                          |              |                    |           |                 |           | 2300 lm       |                     |                    |                   |
| Palla Compasso 130 Track | <b>6333</b>  | <b>BC33</b>        |           |                 | 33W       | 3220 lm       | <b>12 / 22 / 32</b> |                    |                   |
|                          |              |                    |           |                 |           | 3300 lm       |                     |                    |                   |

## Notes:

\* For complete code ordering information, please see page 377.

\*\* For other CCT options, please contact us.

For related accessories, please see page 149.

## Palla Compasso Family configuration options

Code ordering example: 6 3 3 1 B C 2 2 - 9 0 3 0 1 6 D 0 1 0

### Palla Compasso 70

Track

| Product Code      | Light Source Code       | >CRI      | CCT             | LED Power | Nominal Lumen | Beam Angle (BA°)    | Driver Options     | Finish            |
|-------------------|-------------------------|-----------|-----------------|-----------|---------------|---------------------|--------------------|-------------------|
| <b>6331</b>       | <b>BC22</b> Citizen COB | <b>90</b> | <b>30</b> 3000K | 12W       | 1500 lm       | <b>16 / 25 / 36</b> | <b>D0</b> No Dim   | <b>10</b> ■ Black |
|                   |                         |           | <b>40</b> 4000K |           | 1550 lm       |                     | <b>DA</b> Dali Dim |                   |
| <b>BS12</b> Soraa | SLC-16                  | <b>95</b> |                 | 10W       | 500 lm        | <b>10 / 25 / 36</b> | <b>DC</b> CASAMBI  |                   |
|                   |                         |           |                 |           | 525 lm        |                     |                    |                   |

### Palla Compasso 100

Track

| Product Code       | Light Source Code       | >CRI      | CCT             | LED Power | Nominal Lumen | Beam Angle (BA°)    | Driver Options     | Finish            |
|--------------------|-------------------------|-----------|-----------------|-----------|---------------|---------------------|--------------------|-------------------|
| <b>6332</b>        | <b>BC33</b> Citizen COB | <b>90</b> | <b>30</b> 3000K | 21W       | 2200 lm       | <b>15 / 24 / 38</b> | <b>D0</b> No Dim   | <b>10</b> ■ Black |
|                    |                         |           | <b>40</b> 4000K |           | 2300 lm       |                     | <b>DA</b> Dali Dim |                   |
| <b>BS12</b> Soraa  | SLC-16                  | <b>95</b> |                 | 14W       | 800 lm        | <b>10 / 25 / 36</b> | <b>DC</b> CASAMBI  |                   |
|                    |                         |           |                 |           | 850 lm        |                     |                    |                   |
| <b>BX25</b> Xicato | Artist XTM              | <b>98</b> | <b>27</b> 2700K | 13W       | 1400 lm       | <b>16 / 28 / 38</b> |                    |                   |
| <b>BX31</b>        | Beauty XTM              | <b>95</b> |                 | 9.5W      | 931 lm        | <b>28 / 35 / 45</b> |                    |                   |
| <b>BX41</b>        | Designer XTM            | <b>90</b> |                 | 11.4W     | 1300 lm       |                     |                    |                   |

### Palla Compasso 130

Track

| Product Code       | Light Source Code       | >CRI      | CCT             | LED Power | Nominal Lumen | Beam Angle (BA°)    | Driver Options     | Finish            |
|--------------------|-------------------------|-----------|-----------------|-----------|---------------|---------------------|--------------------|-------------------|
| <b>6333</b>        | <b>BC33</b> Citizen COB | <b>90</b> | <b>30</b> 3000K | 33W       | 3220 lm       | <b>12 / 22 / 32</b> | <b>D0</b> No Dim   | <b>10</b> ■ Black |
|                    |                         |           | <b>40</b> 4000K |           | 3300 lm       |                     | <b>DA</b> Dali Dim |                   |
| <b>BS22</b> Soraa  | SLC-30                  | <b>95</b> |                 | 20W       | 1200 lm       | <b>09 / 25 / 36</b> | <b>DC</b> CASAMBI  |                   |
|                    |                         |           |                 |           | 1300 lm       |                     |                    |                   |
| <b>BX25</b> Xicato | Artist XTM              | <b>98</b> | <b>27</b> 2700K | 20W       | 2000 lm       | <b>25 / 36 / 45</b> |                    |                   |
| <b>BX32</b>        | Beauty XTM              | <b>95</b> |                 |           |               |                     |                    |                   |
| <b>BX43</b>        | Designer XTM            | <b>90</b> |                 | 25.7W     | 3000 lm       |                     |                    |                   |

#### Notes:

For other CCT options, please contact us.

## Optical Accessories



| Product / Optical Accessories | Honeycomb Louvre<br>Colour 10 | Visor<br>Colours 10, 17 | Snoot<br>Colours 10, 17 | Anti-glare Tube<br>Colours 10, 17 |
|-------------------------------|-------------------------------|-------------------------|-------------------------|-----------------------------------|
| Palla Compasso 70 Track       | <b>2B95</b>                   | <b>2B98</b>             | <b>2B96</b>             | <b>2B97</b>                       |
| Palla Compasso 100 Track      | <b>2B99</b>                   | <b>2C03</b>             | <b>2C01</b>             | <b>2C02</b>                       |
| Palla Compasso 130 Track      | <b>2C04</b>                   | <b>2C07</b>             | <b>2C05</b>             | <b>2C06</b>                       |

For SORAA specific accessories, please contact us and we will provide the detailed information.