

INSTALLATION GUIDE

ChargePort Plus | TA-7810



teleadapt



Table of Contents

2	Products Covered By This Installation Guide
2	ChargePort Plus Part Numbers
3	Important Safety Instructions
3	Approval Information
4	What Is Included In The Box
5	Preparation For Installation
5	Installation
5	Additional Information
6	Warranty
6	Contact Details

2

Products Covered By This Installation Guide

ChargePort Plus is an attractive power and charging solution designed with hotel guest rooms in mind. It clamps securely onto the back of a desk or nightstand and simply plugs into a 120V, US 3-pin NEMA outlet.

The 3 conveniently sited mains outlets, which are protected by a user resettable safety cutout, can supply a total of 15A.

In addition there are 3 USB charging sockets (2 x USB A and 1 x USB Type-C) which can provide up to 32W for fast charging. The USB Type-C socket supports USB Power Delivery.

ChargePort Plus Part Numbers

TA-7810US-USN2F	ChargePort Plus Black, 2m cable.
TA-7810US-WN2F	ChargePort Plus White, 2m cable.
TA-7810US-USN3F	ChargePort Plus Black, 3m cable.
TA-7810US-WN3F	ChargePort Plus White, 3m cable.

Important Safety Instructions

- Read these instructions carefully before attempting any installation. Follow all instructions and heed all warnings. These instructions should be kept for future reference.
- This equipment is designed for indoor use only.
- The mains plug used to disconnect this equipment from its power source must be readily accessible at all times.
- Ensure the power cords are uncoiled before installation.
- Protect the power cords from being walked on or pinched particularly at plugs, convenience receptacles and the point where they exit from the equipment.
- The power cord must be plugged into a mains socket outlet with protective earthing.
- The maximum distance to the receptacle (mains outlet) is determined by the length of cord provided.
- Clean only with a dry cloth.
- Refer all servicing to qualified service personnel. Servicing is required when the equipment has been damaged in any way, for example if the power supply plug or cord is damaged, liquid has been spilled or objects have fallen into the equipment, the equipment has been exposed to rain or moisture, does not operate normally or has been dropped or damaged.
- Unplug this equipment during lightning storms or when unused for long periods of time.
- Do NOT defeat the safety purpose of the grounded plug. If the provided plug does not fit into your outlet consult a qualified electrician to replace the obsolete outlet.
- Do NOT install or use this equipment near water.
- Do NOT expose this apparatus to rain or moisture.
- Do NOT expose to dripping or splashing. No objects filled with liquid such as vases shall be placed on the equipment.
- Do NOT install near any heat sources such as radiators, convection heaters or other apparatus such as amplifiers that produce heat.
- Do NOT exceed the maximum load of 10 amps.

Approval Information

ETL, conforms to UL STD 962A, certified to CSA STD C22.2 No.308.

3

ChargePort Plus | Installation Guide


ChargePort Plus | Installation Guide

4

What Is Included In The Box

- 1 x ChargePort Plus with integrated cabling.
- 1 x desk clamp.
- 1 x Installation Guide

Dimensions

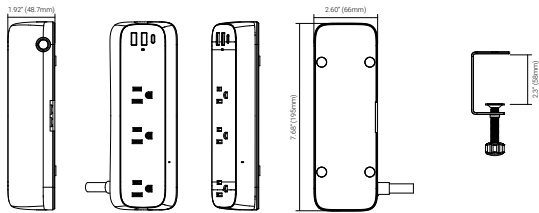

Preparation For Installation

The ChargePort Plus is designed to be installed on a desktop and within reach of a suitable mains outlet. The desk clamp can fit desk tops up to 2.3" (58mm) thick.



Installation

Before starting installation make sure you have read and understood the "Important Safety instructions".

Note the ChargePort Plus must be sited so the power outlet can be reached with the cord provided and without modification to the cord.

Step 1

Place the ChargePort Plus on the desk surface as required.

Step 2

If using the clamp, loosen the clamp, fit the top of the clamp in the slot at the rear of the ChargePort Plus and gently tighten the clamp to secure. Do not over tighten.

Step 3

Insert the plug on the end of the ChargePort Plus power cable into an appropriate 120V mains outlet.

Installation is now complete

5

ChargePort Plus | Installation Guide

6

ChargePort Plus | Installation Guide

Warranty

Please see TeleAdapt "Sales Terms & Conditions" which are available at <http://www.teleadapt.com/teleadapt/sales-terms-conditions.html>.

Contact DetailsAmericas

TeleAdapt Inc
1315 Greg Street
Suite 110
Sparks
NV 89431
USA
Tel: +1 775 355 8585

Asia

TeleAdapt (Hong Kong) Limited
Hong Kong
Kowloon
Tel: +852 2155 1383
Email: hk@teleadapt.com

7

ChargePort Plus | Installation Guide


The page features several registration marks (crosshairs) and crop marks (circles with lines) positioned around the perimeter of the central dark gray area.

teleadapt

Visit our website at: www.teleadapt.com

TA-7810-xxxx, ChargePort Plus Installation Guide.
Revision 10, 2023-02-21.

All rights reserved. All copyrights and trademarks acknowledged.
Specifications subject to change without notice.

A color calibration bar is located at the bottom of the page, consisting of a series of colored squares: black, white, and various shades of gray, followed by primary and secondary colors (yellow, cyan, magenta, blue, green, red, black, yellow, pink, light blue, and dark gray).