


## Loer Pendant Small - Trio Cluster Installation Instructions

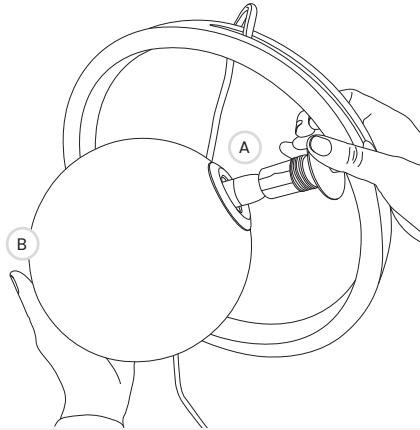

**Only qualified persons should assemble the luminaire. If in doubt, consult a suitably qualified person. Installation MUST be carried out in accordance and compliance with current building regulations.**

**Ensure the electrical supply is turned OFF at the fuse board.**

1. Identify if there are any hidden pipes or electrical cables in the wall to avoid causing damage or risk of electrical shock during installation. Determine the fixing method appropriate to the ceiling structure and secure the plate bracket to the ceiling using the screws provided, ensuring it is secured to a suitably strong joist or beam.
2. Before attaching the ceiling plate to the bracket, each pendant should be adjusted to the desired drop height. Loosen the cord grip at the top of each pendant drop. Excess wire can be carefully coiled into the recess of the ceiling plate or ceiling. Tighten the cord grips to securely hold each of the pendants at the chosen height. Support the ceiling plate so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help. The luminaire is designed to be attached to an electrical supply of **220-240V AC 50-60Hz**.
3. Once the individual pendant drops are adjusted to the desired height and the electrical connection is made, hand tighten the decorative screws through the ceiling plate onto the plate bracket to securely hold the fitting in place.
4. Screw in the light bulbs supplied (A). The cluster light fitting has been designed to work with E27 **LED** candle shape light bulbs, up to a maximum of **9.5 Watts** each.
5. Carefully thread glass sphere (B) over the light bulb and locate onto the brass thread of the bulb holder. Gently tighten the sphere onto the bulb holder securely connecting the two parts. Due to the fragility of the glass sphere diffuser, this step should be carried out with great care to avoid breakage.
6. Turn the power supply on to complete installation.

*\*\*\* If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. \*\*\**