


Component Identification:

- 1** INPUT : Connection for guitar
- 2** AMP : Simulation selector, Turn to select desired simulated amps AC, JAZZ, PLEX, TUBE, LEAD, SL77, PV51, RECTO.
- 3** GAIN : Adjust the gain/drive level.
- 4** TREBLE: Adjust active TREBLE range equalization with boost & cut.
- 5** BASS : Adjust active BASS range equalization with boost & cut.
- 6** VOLUME(MASTER) : Setting from zero to full power.
- 7** Modulation Effects : Select DSP effect “CHORUS”, “FLANGER”, “VIBRATO”.
 - * **CHORUS**: In this effect, slightly detuned sound is added to the original sound, giving the sound greater breadth and fullness.
 - * **FLANGER**: This creates a flanging effect that creates a sort of a spinning, sensation with the sound.
 - * **VIBRATO**: It is a vintage vibrato sound, and the gentle shaking is excellent.
- 8** Effects : Turn this knob to change to either “DELAY”, “REVERB” “D+REVERB”
 - * **DELAY**: Turn the knob to change the time and amount of Delay effects.
 - * **REVERB**: Turn the knob to adjust the reverb level.
 - * **DELAY + REVERB**: Turn the knob to adjust the Delay+Reverb level.
- 9** Electronic Rhythm Module : Using the Rhythm Machine
 - * **Drum button** : Press the button for 3 seconds to drum on/off
 - * **Turn button** : Press the button to change the rhythm and tempo and volume
 - * **DOWN, UP** : - Rhythm: 30 different drum sounds can be changed
 - Tempo: Change the rhythm tempo speed
 - Volume: Adjust the drum volume
- 10** AUX IN : It is for external device connection, has 350 mV sensitivity.
- 11** PHONES: Used to connect stereo headphone. Automatically turns off the amplifier speaker.
- 12** POWER : The switch is to turn ON/OFF.
- 13** EXT. OUT : Speaker cabinet connection 8 Ohm.
- 14** PRE OUT : Preamp out.
- 15** OTG : 44Hz / 24BIT Computer & smart phone recording, live performance possible
Mode Switch : Switch button LIVE mode and INTERFACE mode
- 16** CONNECTIVITY :
 - Turn on RETRO 25.
 - Enter pairing mode and pair “RETRO 25” in smart phone.
 - When pairing smart phone, it needs to go through pairing process, but it pairs automatically hereafter
- 17** DC IN : DC IN JACK.

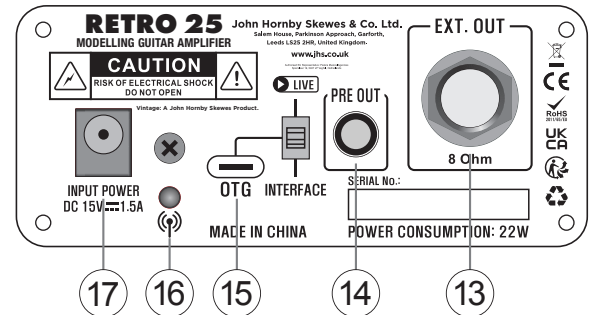

SPECIFICATION

- | | |
|--|---|
| - Power Output : 25W MAX @ 1.0% THD Into 4Ω | - Pre Out: Preamp out |
| - Input : 1 X Guitar Input, 1 X Aux In | - Speaker : 2 X 5" 4Ω |
| - Output: 1 X Phones, 1 X PRE Out, 1 X EXT. Out | - AMP: AC, JAZZ, PLEX, TUBE, LEAD, SL77, PV51, RECTO. |
| - Bluetooth: 5.0 | - Controls : Gain, Treble, Bass, Volume(Master), Power S/W. |
| - OTG: Desktop and mobile phone 44Hz /24 Bit recording and live performance. | - Effects: Chorus/Flanger/Vibrato, Delay/Reverb/D+Reverb |
| - EXT-OUT: 8 Ohm speaker cabinet connection | - Rhythm Controls : Drum, Turn, Down, up |
| | - Dimension : W357 X D187 X H195(mm) |

John Hornby Skewes & Co. Ltd.
Salem House, Parkinson Approach, Garforth,
Leeds LS25 2HR, United Kingdom.

www.jhs.co.uk

Authorized EU Representative: Peders Media Agency
Sporlaar 19, 5407 JP Wejden, Netherlands

MADE IN CHINA



Vintage: A John Hornby Skewes Product.

© JHS 2024. Specifications are subject to change without prior notice.

WARNING: Amplifier fails to function, please contact your local distributor.
Under no circumstances remove the back panel of the amplifier while it is Connected to main supply.