

SIROCCO HAND DRYER BRUSHED



- BRUSHED 304G STAINLESS STEEL
- DRYING TIME: 10-12 SECONDS
- VOLTAGE: 110-130V~/220-240V~
- FREQUENCY: 50/60HZ
- RATED POWER: 1000W
- MOTOR POWER: 550W
- HEATING ELEMENT POWER: 450W
- RPM: 30000
- SOUND PRESSURE (AT 1M): 75DBA
- PROTECTION RATING: IPX4

AVAILABLE IN MULTIPLE FINISHES




BRUSHED S/S

CODE:
PL95MBS



BLACK


CODE:
PL95MBK

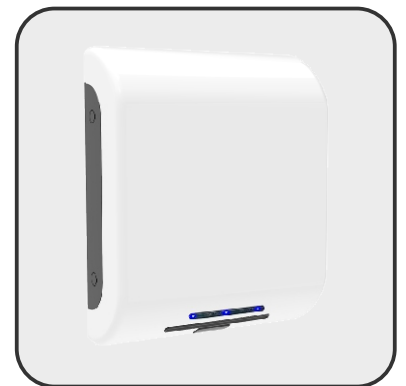

WHITE

CODE:
PL95MWH

DIMENSIONS IN MM:-

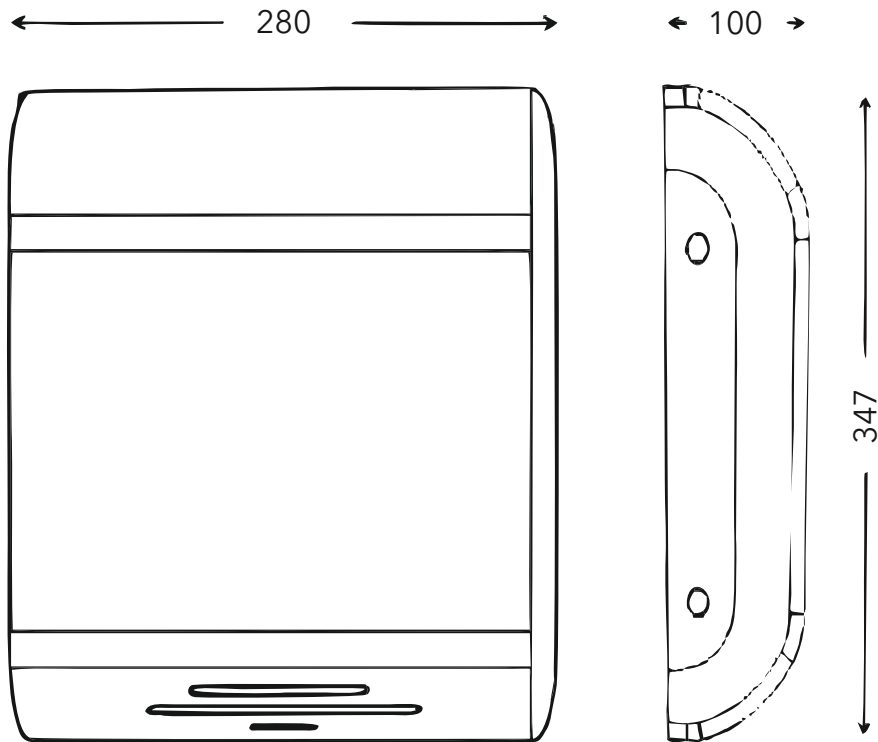

DURABLE MOTOR: EQUIPPED WITH HIGH-QUALITY BEARINGS AND A LONG-LASTING 90MM CARBON BRUSH.

SAFE HEATING: UTILISES A PTC CERAMIC HEATER THAT DOES NOT TURN RED ON THE SURFACE, ENHANCING SAFETY.

EFFECTIVE STERILISATION: FEATURES A DOUBLE-LAMP UV STERILISER (90MM X 8MM) PROVIDING A LARGE IRRADIATION AREA FOR IMPROVED DISINFECTION. INDEPENDENT SWITCH BUTTONS CATER TO VARIOUS USER NEEDS.

ADVANCED FILTRATION: E11 HEPA FILTER (120MM X 83MM X 15MM) REMOVES 97.66% OF BACTERIA, ENSURING CLEAN AIR.

ADJUSTABLE CONTROLS: WIND SPEED: NOISE LEVEL AND DRYING TIME CAN BE CUSTOMISED.

HEAT CONTROL: ENHANCES USER COMFORT. **SENSOR RANGE:** ADJUSTABLE INDUCTION DISTANCE TO ACCOMMODATE VARIOUS INSTALLATION POSITIONS.

ROBUST CONSTRUCTION: MADE FROM STAINLESS STEEL, THE DRYER IS SECURED WITH FOUR CONCEALED ANTI-THEFT SCREWS FOR ENHANCED SECURITY.

USER-FRIENDLY MAINTENANCE: THE RIGHT SIDE PANEL ALLOWS EASY ACCESS TO ADJUST MOTOR SPEED, AIR TEMPERATURE, SENSOR POWER BUTTON, AND UV LAMP BUTTON WITHOUT REMOVING THE FRONT COVER, SIMPLIFYING OPERATION AND MAINTENANCE.

RELIABLE OPERATION: CONTROLLED BY A CPU WITH AN ACCURATE AND RELIABLE INFRARED SENSOR.

SAFETY FEATURES: INCLUDES MULTIPLE PROTECTIONS AGAINST OVERHEATING, OVERCURRENT, AND PROLONGED OPERATION.



THE SYMBOL OF A GENUINE DISPENSER