

How to Install Your New Light

Please check that you received all of the components pictured in this guide. Reach out to us if anything is missing. It's very rare, but it happens. Don't forget to turn off the electrical power source.

Tools you will need that aren't included: standard wire stripper, Phillips head screwdriver.


CAUTION

Electrical shock risk. Turn off electrical power at the main fuse box or circuit panel before beginning installation, servicing the light, or installing accessories. We recommend working with a qualified electrician familiar with the type of work you'd like done.


ATTENTION

Risque de choc électrique. Coupez l'alimentation électrique au niveau de la boîte à fusibles principale ou du panneau de circuits avant de commencer l'installation, l'entretien de la lumière ou l'installation d'accessoires. Nous vous recommandons de travailler avec un électricien qualifié familier avec le type de travail que vous souhaitez effectuer.


Contents

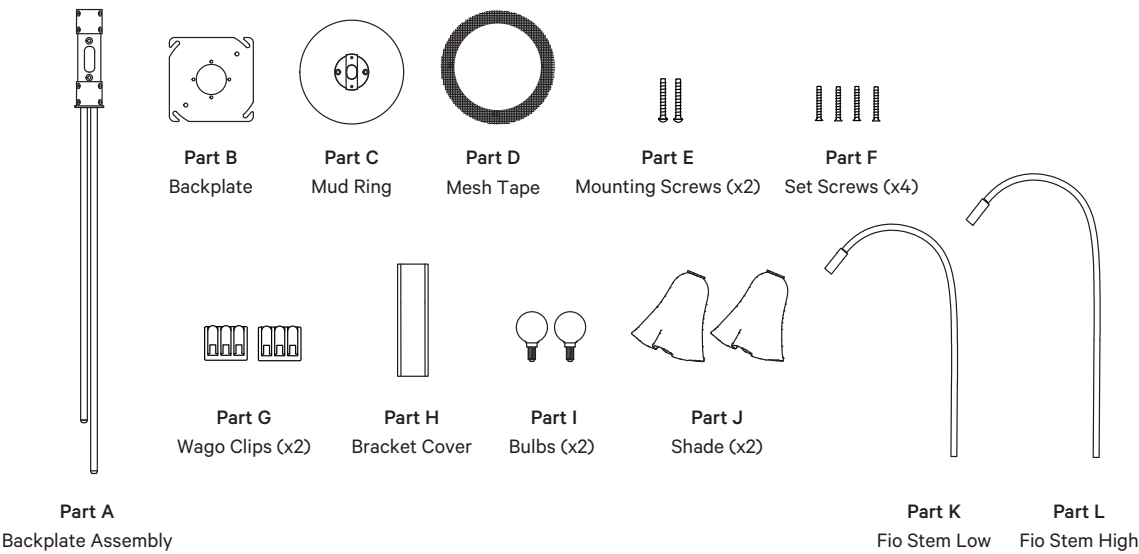


Step 1: Turn off electrical power at the main fuse box or circuit panel before beginning installation.

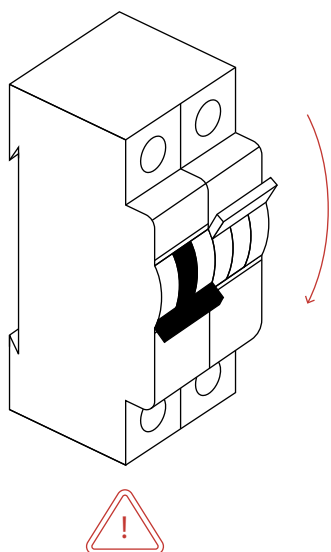


Step 2: Mount the backplate (B) to the junction box using a phillips head screwdriver to tighten the mounting screws (E). Make sure the backplate is recessed at least 1/16 of an inch for proper installation.

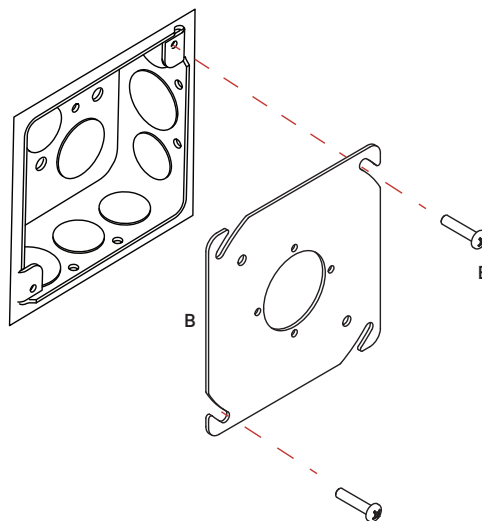


Step 3: Attach the mudring (C) to the backplate (B) using the countersunk screws (F) provided.

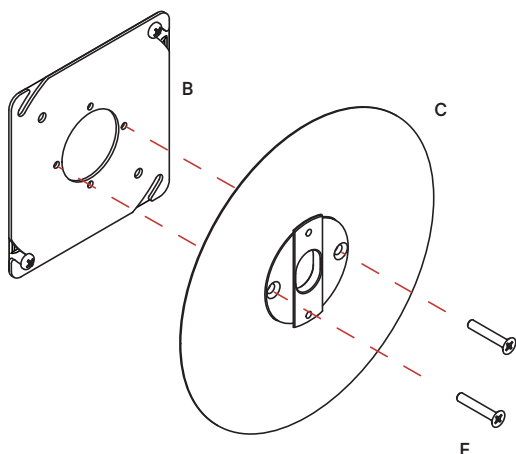


Step 4: Apply drywall mesh tape, overlapping the perimeter of the mud ring and the wall. Plaster over drywall mesh-tape, mudring, and wall. We recommend applying three coats of plaster, allowing time for the plaster to dry and sanding between coats. Ensure this area painted before proceeding to the next steps.

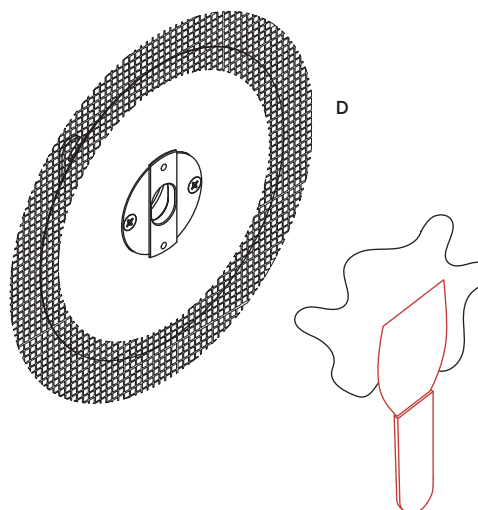


Step 5: Attach the bracket assembly (A) to the exposed part of the mudring (C).

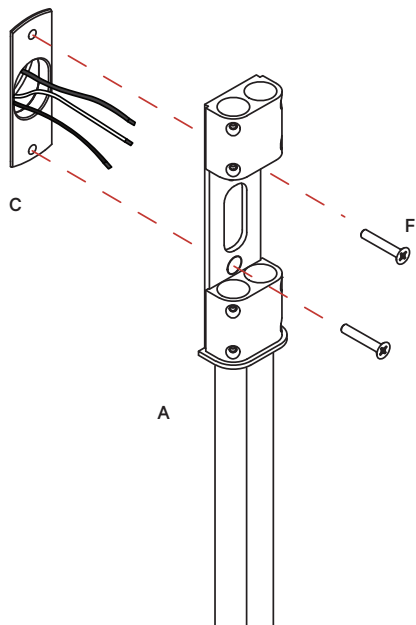


Step 6: Feed the wires of the arc stems (J+K) through the top of the bracket assembly (A), and follow with the stems.




Step 7: Align the holes of the bracket (A) with the holes of the stems (K+L) secure the stem using the set screw (F) provided.

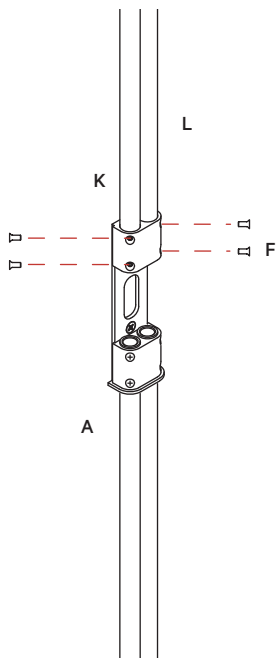


Step 8: Use the wago clips (G) to connect the wires in the Fio stem to the corresponding wires in the low stem. White is neutral; Black is live; Green/ Yellow is ground.

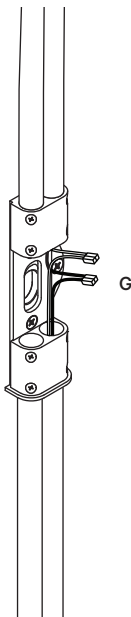

Step 9: Slide the bracket cover (H) over the bracket (A).

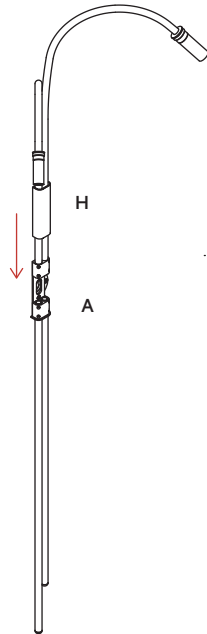

Step 10: Carefully feed the shade (J) onto the end of each stem (K+L).

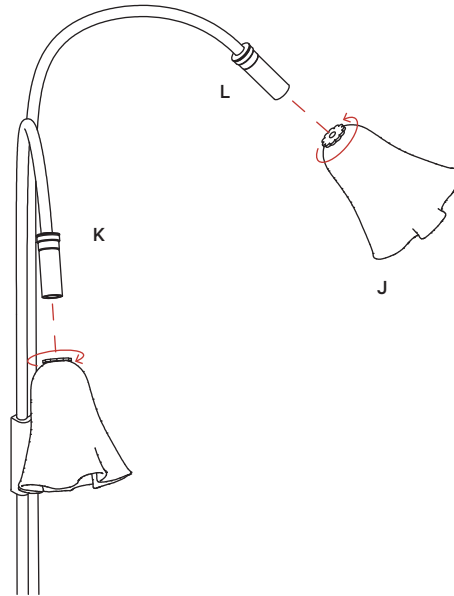

Step 11: Screw the included bulbs (I) into place. Turn the power back on at the main fuse box or circuit panel you disabled before installation.

