


Pixapro® 2.4GHz Wireless Radio Remote Instruction Manual

This 2.4GHz Wireless Radio Remote control allows you to wirelessly control a single head unit, or multiple groups of lights simultaneously, without having to walk up to each individual light and set each one. This remote control is for use with the Pixapro® LED 100 Series and LED 1024B LED Video Lights.

1. Specifications:

Model	WR-L	Operating Range	15 meters
Power Supply	Two AAA Batteries (not included)	Camera Interface	Hot Shoe
Frequency	2.4GHz	Dimensions (mm)	84 x 45 x 35 mm
No. of Channels	10 Zones 10 Channels	Weight (g)	48g

2. Diagram:

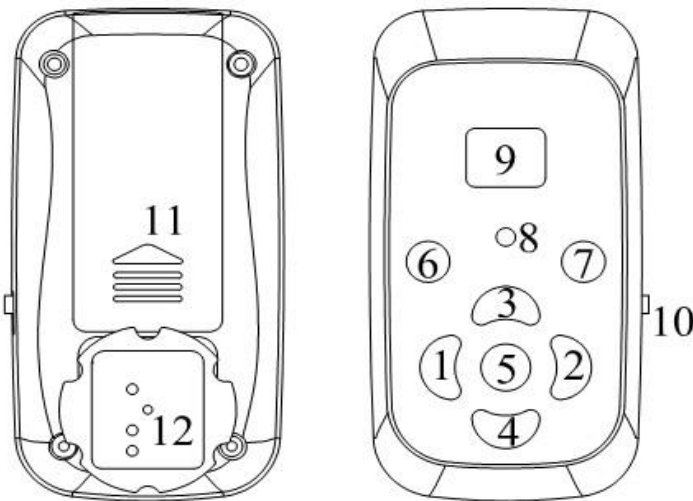

1. P0-P9 Zone Select
2. C0-C9 Channel Select
3. Up Button
4. Down Button
5. Function Button
6. AL Function Key
7. PL Function Key
8. Function Switching Indication
9. Digital Display
10. Power Switch
11. Battery Compartment & Battery Cover
12. Hot Shoe Connection

3. How to Use:

- 1) Open the battery compartment (11) and insert 2x AAA Batteries.
- 2) Turn on by the using the power switch located on the side of the unit.(10)
- 3) To Select a Channel: Press the Zone Button (1), and the display shows “P” (For setting Zones or Groups). You can change zone by using the up and down buttons (3&4). To set your channels, press the Channel button (2), and the display shows “C” (For setting the channel). You can change the channel by using the up and down buttons (3&4).
- 4) **Remote Control:** Please confirm the zone and channel of your light(s), then change the Zone and channel of the wireless remote to match the zone and channel of your light(s).
- 5) **Function Button:** If the light has two color temperatures to select, push the Function Button (5). The function switching indicator (8) will show either red or green. The red light indicates that you are controlling the 3200k LEDs, and the green light indicate that you are controlling 5500k LEDs. At the same time, the Digital Display (9) will show luminance of the LEDs that are being controlled.
- 6) **AL Function Key:** Push the AL Function button (6); When the digital display (9) shows “AL”, push the up and down buttons (3&4) function button (5) and you can remote control all of the lights together. When the digital display (9) shows nothing, wireless remote will reset to a single light set up automatically.
- 7) **PL Function key:** Push the PL Function button (7); When the digital display (9) shows “PL”, push up and down buttons (3&4) the function button (5) and you can remote control all the lights which have same “P” number (Zone Number); When the digital display (9) shows nothing, wireless remote will reset to a single light set up automatically.

4. Warning!

- 1) Please keep product clean. When clean up the product, please turn off the power.
- 2) Please turn off the power and remove the batteries to prevent battery leakage if you will not use remote control receiver for a long time.
- 3) Please do not place the product in direct sunlight or in a hot, humid or dusty environment. Do not expose the product to water.
- 4) Please do not use solvent, gasoline, paints and pesticides on this product.
- 5) Do not attempt to repair the product on your own. Please contact your dealer if needed.