

## ● Warning And Notes


1. The environment should be kept dry and ventilated when using the light.
2. Please do not let the device be exposed to rain or moisture, to avoid circuit problem.
3. Please do not use the light with over- rated voltage.
4. It's normal the fixture will be a little hot when working.
5. During transportation and installation process, please do not hit against other items, or else it may cause deformation to the lamp shade and damage to the light.
6. Please do not directly look at the light bulb with naked eyes when the light is on.
7. Please do not place the light near by such as alcohol or gasoline and other flammable or volatile solvents.
8. Please use the soft dry cloth to clean the light. You can wash with a cloth with some neutral detergent to remove the dirt that is difficult to remove, and then dry with a soft cloth.
9. Keep the light out of reach from children.
10. Please do not work when over-current.
11. Do not disassemble equipment. Touch the product's internal part could result in injury. In the event of malfunction, the product should be repaired only by a qualified technician.
12. Please cut off power when the light isn't used for long time.
13. Please note the precautions, or could result in injury.

PIXAPRO

Unit 5 Sterling Park  
Pedmore Road  
Brierley Hill  
United Kingdom  
DY5 1TB

# RICO240 RGB MKII

## Instruction Manual

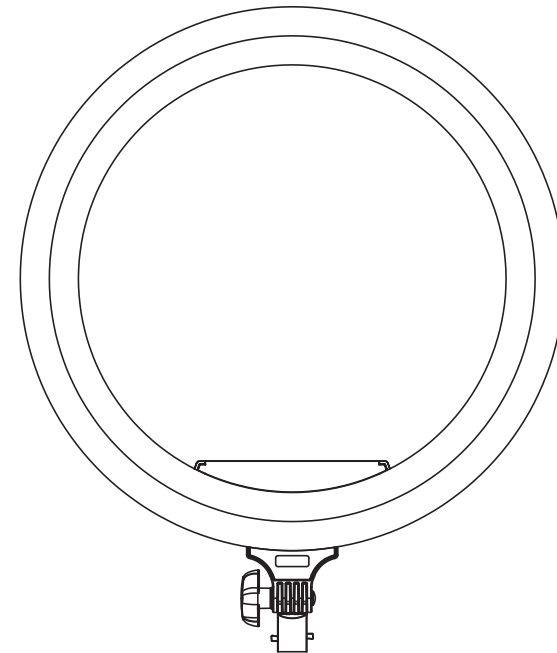


● Product Information

This 19" LED Ring Light is an ideal way to achieve soft, nearly shadowless light quality that's flattering to skin, makeup, and close-up portraiture. The light's RGB mode features 360 selectable colours. You can make these adjustments locally from the fixture or remotely. You may recharge your smartphone via the 5V2A USB port while shooting. The light intensity from 10-100% is controlled by a simple dial, and color temperature is adjustable from 3200K-5600K. The Ringlight has dual power design, it comes with UL certified power adapter and accept 110V-240V voltage, and the battery mounts accept Sony type NP-F750/970 batteries.

● Model Parameter List

|                       |  |
|-----------------------|--|
| Output Power          | 60W  |
| Luminous Flux         | 4800LM   |
| LED Quantity          | White LED 432PCS/RGB LED 108 PCS                           |
| Color Temperature     | 3200-5600Continuous adjustment                             |
| Color Change          | 0-360°   |
| Light Source          | (0.5W SMD LED/1.5W RGB LED bulbs)                          |
| Color rendering index | ≥95  |
| Dimmer                | 10%-100%   |
| Remote Control        | 99 channels 2.4G wireless remote control                   |
| Lithium Battery Type  | NP-F750/NP-F960*2  |
| DC power input        | DC13-19V   |
| Adapter               | DC15V 4A   |
| Size                  | Outer diameter 485mm, Inner diameter 390mm, Thickness 45mm |

● Overview

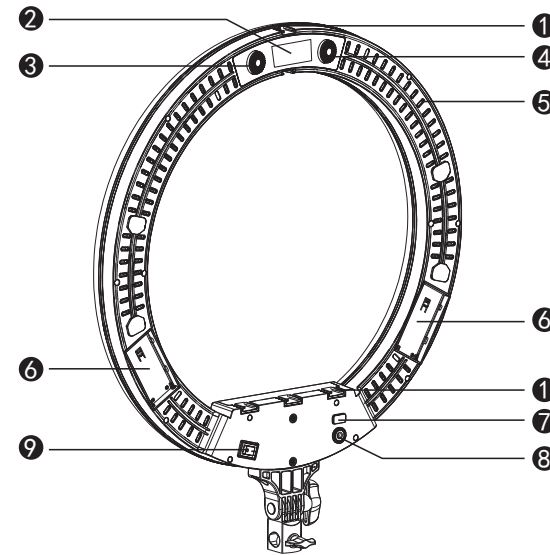

- ① Shoe cover
  - ② LED display
  - ③ Dial to adjust color temperature / Special effect
- Special Effect Mode :**  
 In CCT mode, press knob ③ for 2 seconds to go to special effect mode.  
 F1: Paparazzi      F2: Fireworks      F3: Faulty bubble  
 F4: Thunder flash      F5: TV
- In RGB mode, press knob ③ for 2 seconds to go to special effect mode.  
 F1: Alarm lamp      F2: Colors circulation      F3: SOS  
 F4: KTV      F5: Fire
- ④ Dimmer / RGB mode / remote channel
  - ⑤ Vents
  - ⑥ Battery mount
  - ⑦ USB
  - ⑧ Power socket
  - ⑨ Power Off/ adapter switch / battery switch