


Polaris

2x2 LED panel light

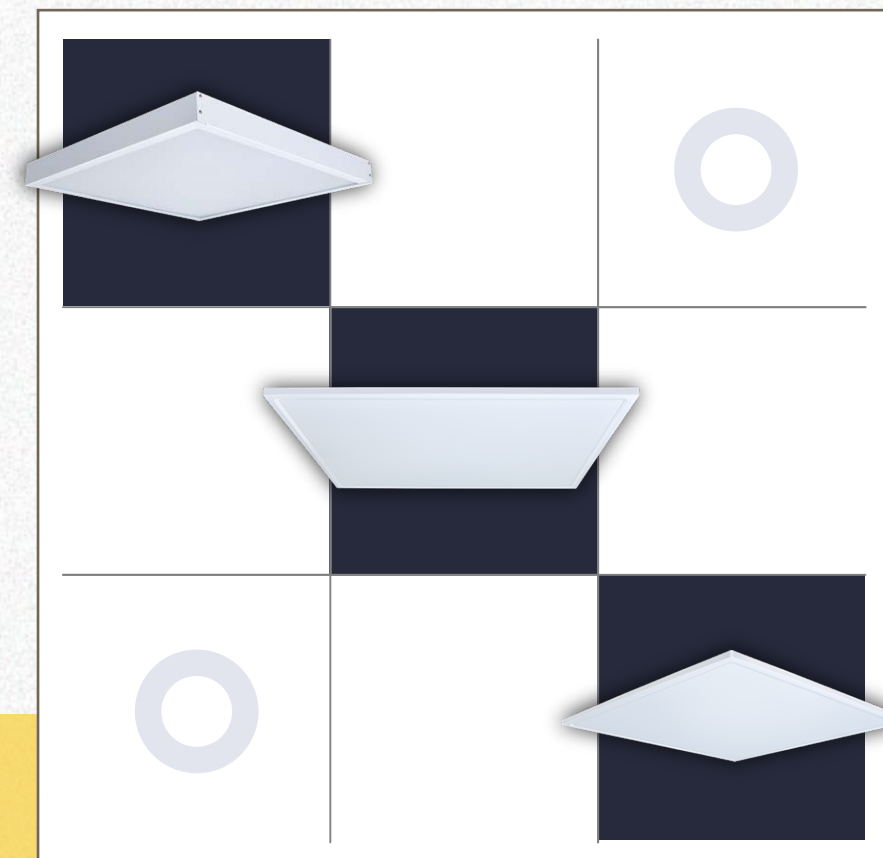

**Light the Grid.
Win the Space.**



Step into a new era of performance with Polaris.
Designed to blend seamlessly into modern workspaces



Crompton Greaves Consumer Electricals Limited
05GBD, Godrej Business District, Pirojshanagar,
Vikhroli (West), Mumbai, Maharashtra - 400079, India
Customer Care No. : +91 9228880505 | www.crompton.co.in
Email: consumer.support@crompton.co.in

 System efficacy of 100, 120 & 140 Lm/W	 CCT of 6500K, 5700K, 4000K & 3000K	 Backed by 2 & 5 year warranty options
 Available in 24W, 30W, 36W, 40W, 50W, 60W options	 Sleek 600x600mm design	 Flexible installation with surface frame & clamps as an accessory
 Standard & UGR diffuser options for glare-free lighting	 Durable CRCA housing powder coated in white	 Option of EMI/EMC & CISPER 15 compliant driver
 Available in surface & recessed mounting options	 THD <10%, PF >0.95, 4kV surge protection, CRI of 80	 IP40-rated for tough commercial use

What Makes Polaris Stand Out?

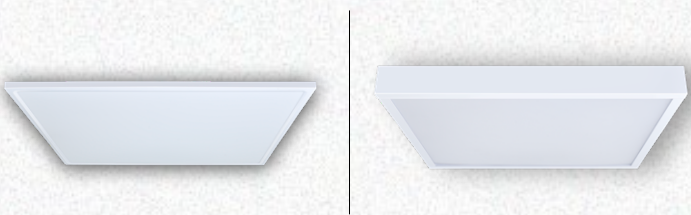

◆ ◆ ◆ 75,000 burning hrs L70 LED Life

Polaris 2x2	Wattage (W)	Approx. Wt. (Kg)	Mains Current. (A)
CCR-145-60-65-SL-DP-NWH	60	1.35	0.305
CCR-145-50-65-SL-DP-NWH	50	1.35	0.255
CCR-145-40-65-SL-DP-NWH	40	1.35	0.190
CCR-145-36-65-SL-DP-NWH	36	1.35	0.180
CCR-145-30-65-SL-DP-NWH	30	1.35	0.135
CCR-145-24-65-SL-DP-NWH	24	1.35	0.120
TCR-145-50-65-SL-DP-NWH	50	1.35	0.255
TCR-145-40-65-SL-DP-NWH	40	1.35	0.190
TCR-145-36-65-SL-DP-NWH	36	1.35	0.180
TCR-145-30-65-SL-DP-NWH	30	1.35	0.135
TCR-145-24-65-SL-DP-NWH	24	1.35	0.120

