

Crompton

Lighting



Crompton Greaves Consumer Electricals Limited
05GBD, Godrej Business District, Pirojshanagar,
Vikhroli (West), Mumbai, Maharashtra - 400079, India
Customer Care No. : +91 9228880505 | www.crompton.co.in
Email: consumer.support@crompton.co.in

Irendz⁺
Illuminate without limits




Offices evolve. Becoming personal, transformative and made for more than just work. In these new age offices, light flows with the space. It adapts to the people and illuminates for performance.

Today's office lighting is imaginative & effortless, and Trendz+ makes it so!




An office linear designed to illuminate the workspace of your dreams!


Crafted with a polished finish, Trendz+ lights up the space with minimum joints and maximum efficiency. Made available with the possibility of a standalone or continuous connection, Trendz+ is your choice of luminaire for sleek, uninterrupted luminance.

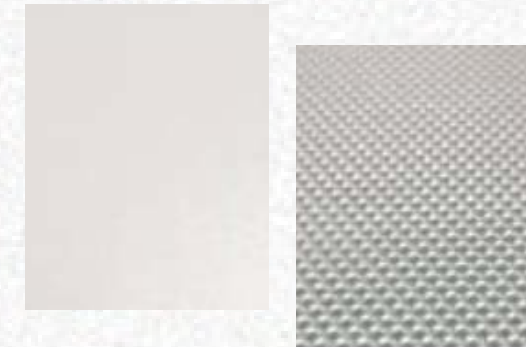

Standard & Prismatic
Diffuser Optics




Housed in a White/Black
Extruded Aluminium Body

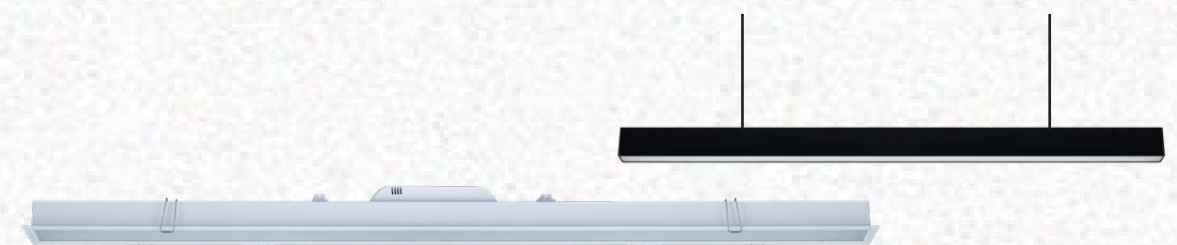

Available in both
suspended & recessed versions

From the light engine to the light distribution...
Exceptional without compromises.

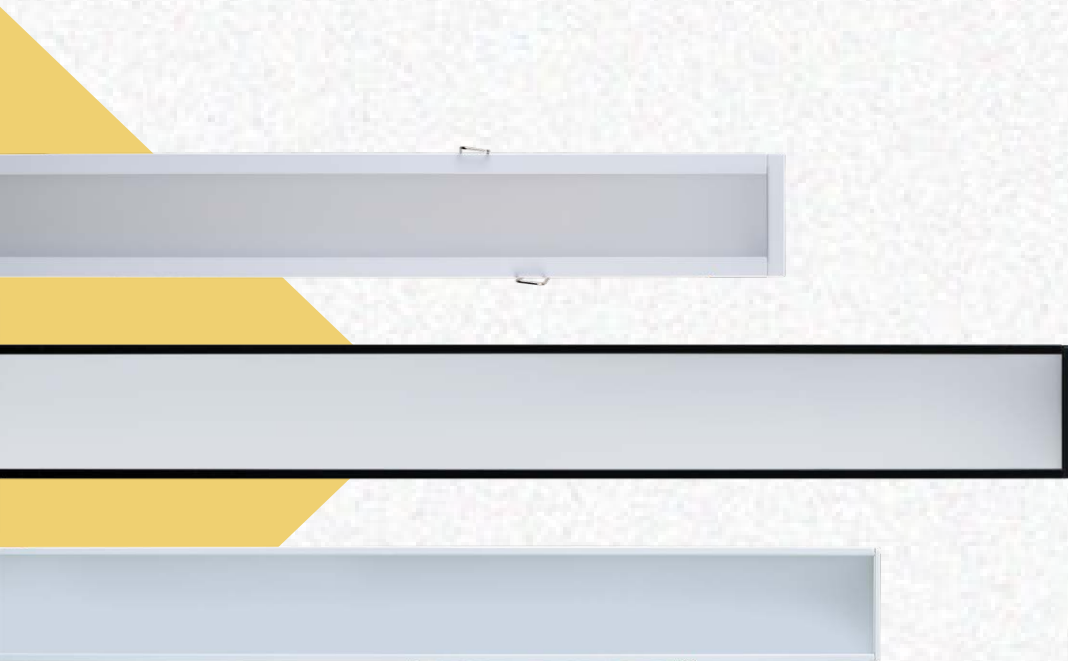

Slim and Polished

Extruded aluminum housing with
Screwless push-fit end cap for a sleek look



Seamless Illumination

Superior design with no light leakage,
providing uniform light distribution



Flexible Sizes

Standalone available in a wide range
of 2ft, 3ft, 4ft, 6ft, 8ft variants



Versatile Mounting

Install as you wish with provision for
recess and suspension mounting



Effortless Connectivity

Unique connectors made available
for continuous mounting



Quick Installation




Hassle-free installation with "Ready In the Box"
connecting kit with Loop In Loop Out facility




Effortless Maintenance

Easy to access top
maintainable driver box

Available in ready sizes
and formations

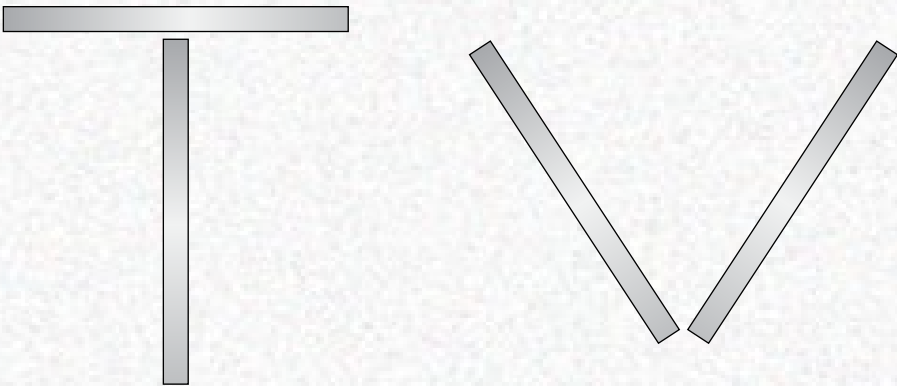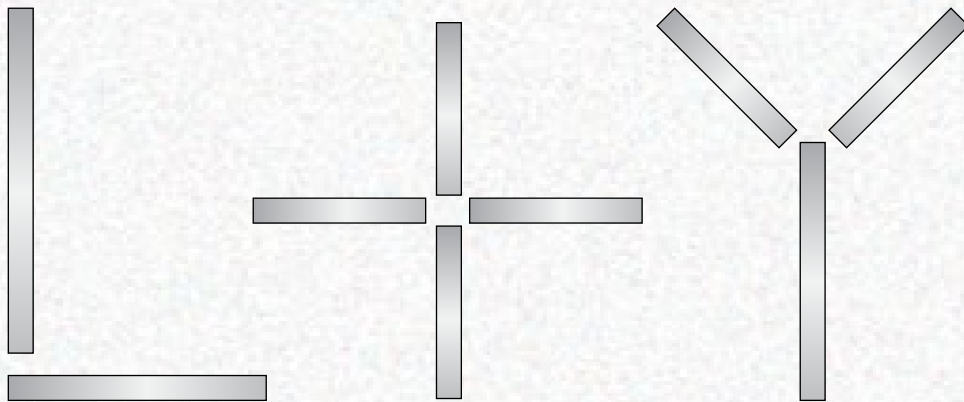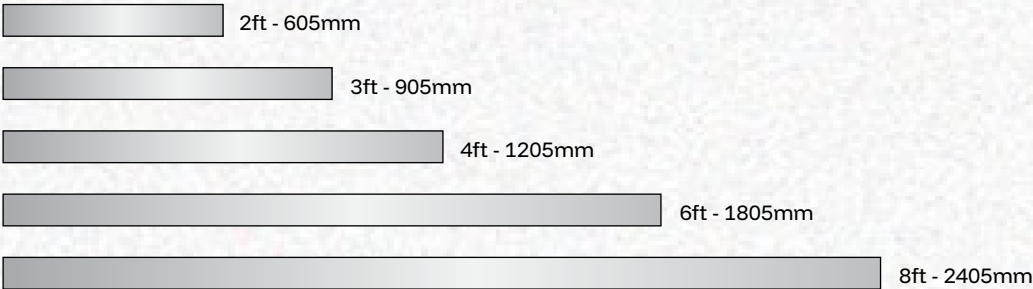



Technical Specifications

- | | | |
|---|---|--|
|  Wattage
10W to 80W |  Lengths
2ft, 3ft, 4ft, 6ft, 8ft |  Diffuser
Standard & Prismatic
Diffuser options |
|  Housing Colour
White & Black |  CCT
6500K / 5700K / 4000K |  Connectivity
Standalone & Connecting
Option (With connecting kit
in the box) |
|  Housing
Extruded
Aluminium Housing |  Loops
Ready to use loop in
loop out facility |  Mounting System
Option of Suspended &
Recess mounting |
|  Suspension
Suspension kit in the
box for suspended
option |  System Efficacy
Standard: 120 Lm/W
Prismatic: 110 Lm/W |  Driver in
Top accessible driver
compartment |
| |  Formations
Formations (L, Y, V, +, T)
available as ready option | |




Application Areas


Office Spaces



Hospitality

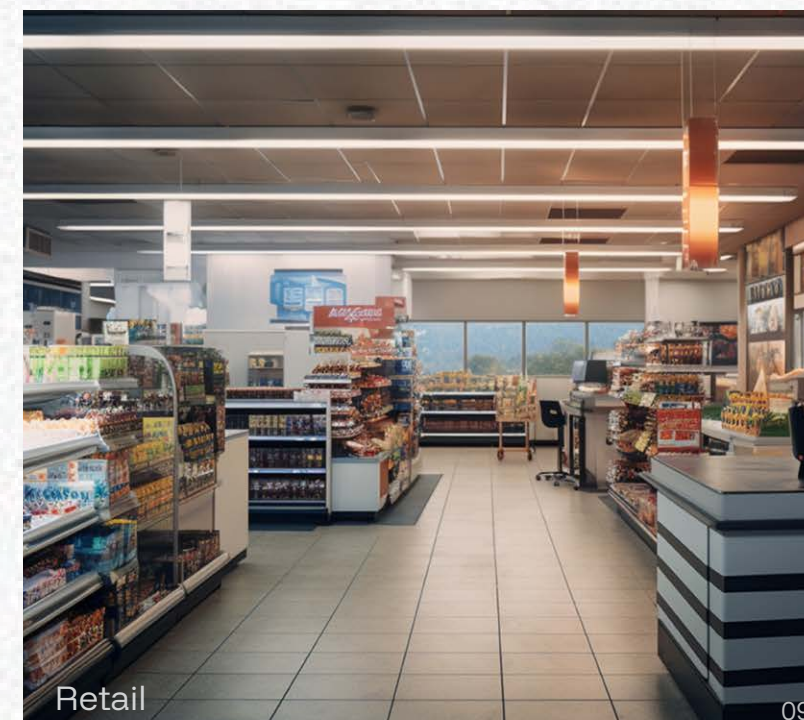

Retail

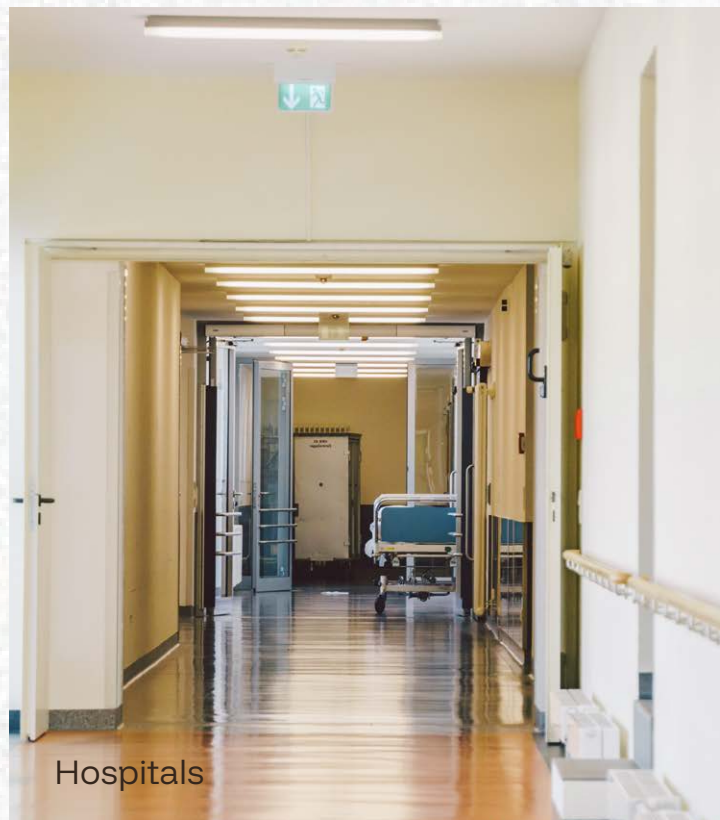

Hospitals



Educational Institutes



Technical Specifications

For Suspended Version

TCP-145-20-65-HL2-DP-12-NWH

For Recess Version

TCR-146-20-65-HL2-DP-12-NWH

P or R denotes the mounting type

20 denotes the luminaire wattage


65 denotes the CCT

HL2 denotes the system efficacy

DP or UG denotes standard/prismatic diffuser

12 denotes the luminaire length

NWH or NBK denotes the housing colour

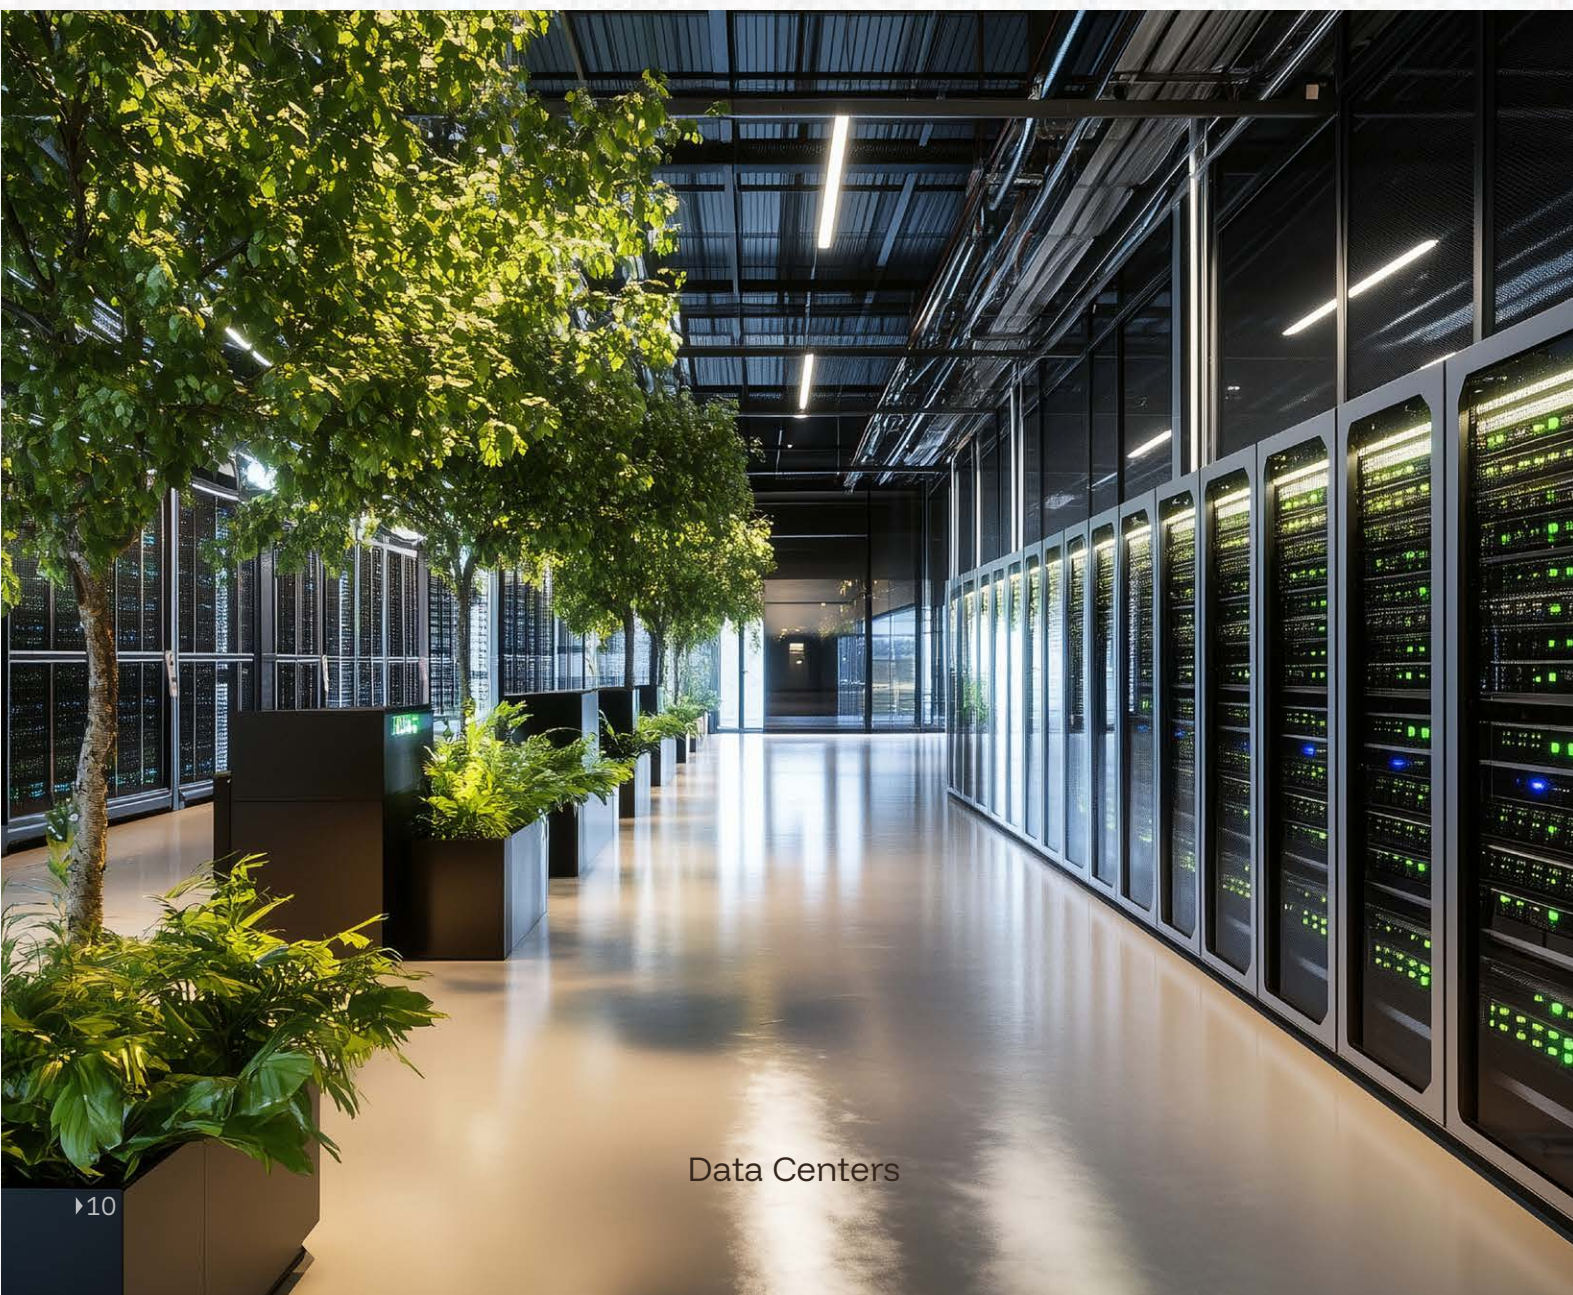

Data Centers