

ALUMINIUM BATTEN

AluLite

Quietly Powerful




Crompton Greaves Consumer Electricals Limited
05GBD, Godrej Business District, Pirojshanagar,
Vikhroli (West), Mumbai, Maharashtra - 400079, India
Customer Care No. : +91 9228880505 | www.crompton.co.in
Email: consumer.support@crompton.co.in



Built for brilliance, powering performance.


AluLite is built on a simple principle - true performance never fails. It's engineered strength, exceptional efficiency, and smart design works together, illuminating spaces with a quiet efficiency.

Crafted from a thermally conductive extruded aluminium channel, the luminaire ensures optimum heat dissipation and longer LED life, making AluLite the perfect fit for functional illumination.



IP40
Ingress
Protection

Highest efficiency industrial batten with 150 lm/W illumination

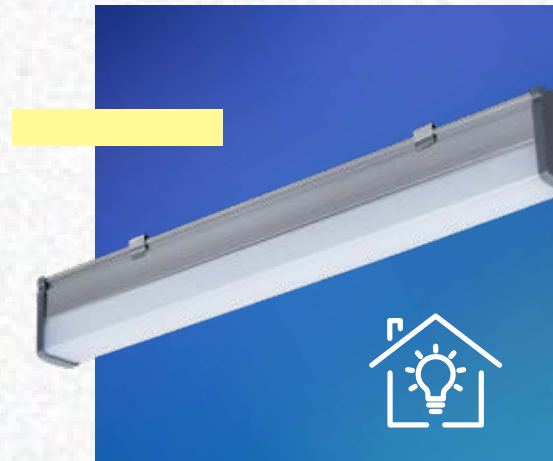

Designed for highest productivity

Made with robust and durable extruded aluminium housing and best in class LED, AluLite delivers uniform, glare-free illumination that is stable and reliable across applications.



Benefit of lowest TCO

The combination of aluminium housing, precision optics, and efficient drivers results in lower running costs, extended product life, and the lowest Total Cost of Ownership in its class.



A complete range for every application

Available in a wide range of wattages from 5W to 60W, and with a wide range of CCT options to choose from, the range covers every lighting need, from corridors and homes to workstations and retail.



Workspaces




Corridors















Warehouses & Factories



Retail Stores

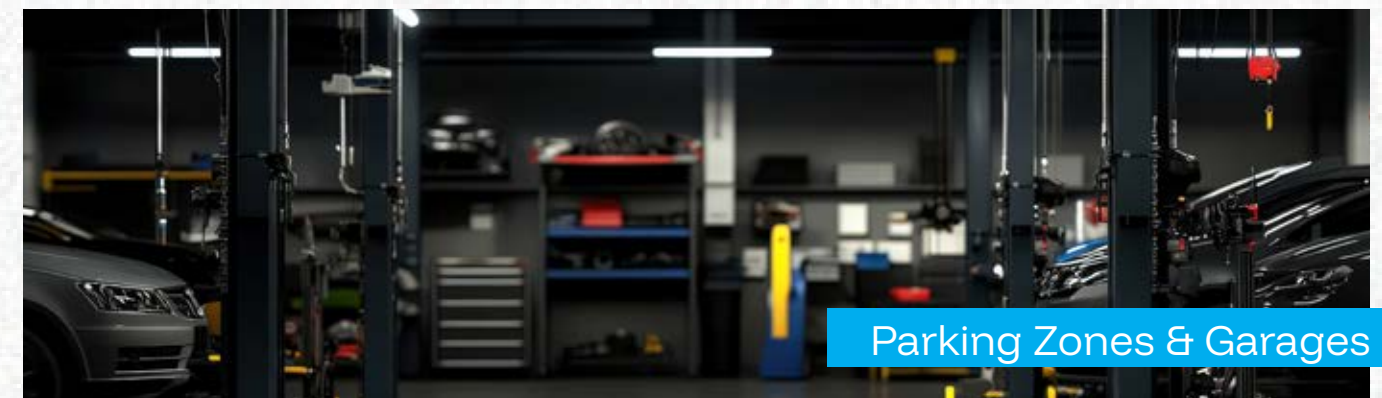

Parking Zones & Garages

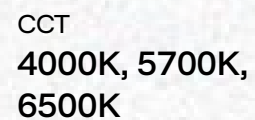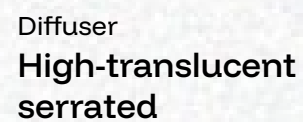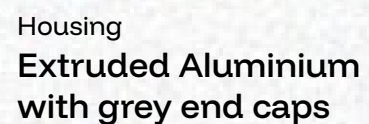

CCS-111-20-65-SL-DP-NWH	20	80	0.09	0.176	6500K
-------------------------	----	----	------	-------	-------


- Replace 20 with 10 / 40 / 50 / 60 in the above catalogue reference number

- Replace 65 with 40 / 57 in the above catalogue reference number

- Replace SL with HL2 for 120 LPW & HL5 for 150 LPW in the above catalogue reference number

- 10W – 0.05A / 20W – 0.09A / 40W – 0.18A / 50W – 0.22A / 60W – 0.27A

**RATED SYSTEM WATTAGE AND CURRENT WILL HAVE TOLERANCE AS PER IS 16104: 2012



TCS-111-20-65-SL-DP-NWH	20	80	0.09	0.180	6500K
-------------------------	----	----	------	-------	-------

- Replace 20 with 05 / 10 / 24 / 36 / 40 in the above catalogue reference number

- Replace 65 with 40 / 57 in the above catalogue reference number

- Replace SL with HL2 for 120 LPW in the above catalogue reference number

- 5W – 0.05A / 10W – 0.05A / 20W – 0.09A / 24W – 0.11A / 40W – 0.18A

**RATED SYSTEM WATTAGE AND CURRENT WILL HAVE TOLERANCE AS PER IS
16104: 2012