

Crompton

Lighting



Industrial Highbays

DELPHINUS PLUS

Lighting for uninterrupted productivity




Crompton Greaves Consumer Electricals Limited
05GBD, Godrej Business District, Pirojshanagar,
Vikhroli (West), Mumbai, Maharashtra - 400079, India
Customer Care No. : +91 9228880505 | www.crompton.co.in
Email: consumer.support@crompton.co.in

When it comes to productivity, **every second counts.**

Your industrial workplaces demand consistent performance, safety, and efficiency across every process and leaves zero room for disruption.

Your workspace needs
lighting that performs
without interruption.

Delphinus Plus is designed for demanding industrial environments, delivering lighting that ensures consistent, safe, and efficient operations at your workspace.

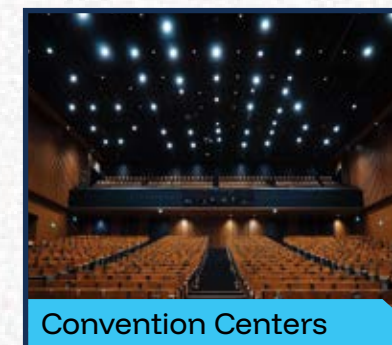



Non-stop Performance

Long LED life of up to 1,00,000 burning hours with built-in 5kV surge protection significantly reduces maintenance needs and downtime



High Colour Accuracy

Backed with NABL LM79 performance testing, ensuring colour precision and reducing visual fatigue during long working hours



Heavy-duty Performance

Features a rugged pressure die-cast aluminium housing with IP66 and IK10 ratings to perform reliably in demanding industrial conditions



Uniform & Shadow-free Illumination

Premium grade IP lens for optimised light distribution which help reducing accidents



Flexibility for Diverse Applications

Cradle and eye bolt mounting options enable easy and adaptable installation



Assured Long-Term Durability

2-year warranty and BIS compliance (IS10322) assures durability, and consistent performance



Delphinus plus is designed to deliver



Wattages
80/ 100/ 120/ 150/
180/ 200/ 250W



CRI
>80



THD
<10%



Protection
IK 10



Mounting System
Cradle & EYE bolt
provided for
mounting purpose



Beam Angle
60°/ 90°



Power Factor
>0.95



Protection
IP 66



Housing
Pressure die cast
Aluminum powder
coated in RAL-7046



CCT
5700K




Burning Hours
>100,000




Surge
5kV


80W &100W

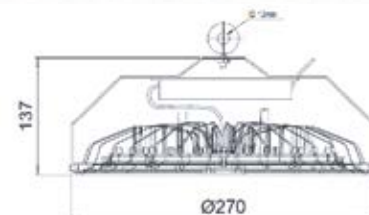

120W & 150W

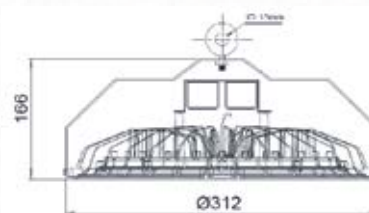

180W, 200 W
& 250W

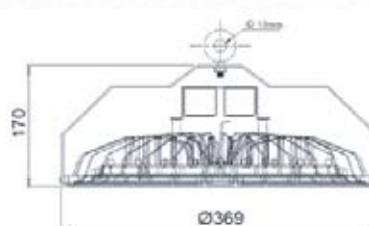

270 mm Diameter

**NOMINAL WATTAGE (W)	CRI (min)	VOLTAGE (V)	Mains current (A)	Approx weight (Kg) ± 10%	CCT (K)
EIP-347-80-857-60D-HL5-LM-NTG					
80	80	240	0.38	1.82	5700
EIP-347-100-857-60D-HL3-LM-NTG					
100	80	240	0.48	1.82	5700

- Available wattages - 80W / 100W
- Available efficacy - >130LPW / 150 LPW
- Mains current - 80W – 0.38A / 100W – 0.48

312 mm Diameter

**NOMINAL WATTAGE (W)	CRI (min)	VOLTAGE (V)	Mains current (A)	Approx weight (Kg) ± 10%	CCT (K)
EIP-346-120-857-60D-HL3-LM-NTG					
120	80	240	0.57	2.40	5700
EIP-346-150-857-60D-HL3-LM-NTG					
150	80	240	0.72	3.03	5700

- Available wattages - 120W / 150W
- Available efficacy - >130LPW / 150 LPW
- Mains current - 120W – 0.57A / 150W – 0.72A

369 mm Diameter

**NOMINAL WATTAGE (W)	CRI (min)	VOLTAGE (V)	Mains current (A)	Approx weight (Kg) ± 10%	CCT (K)
EIP-345-180-857-60D-HL3-LM-NTG					
180	80	240	0.86	3.67	5700
EIP-345-200-857-60D-HL3-LM-NTG					
200	80	240	0.96	3.67	5700
EIP-345-250-857-60D-HL3-LM-NTG					
250	80	240	1.20	3.67	5700

- Available wattages - 180W / 200W / 250W
- Available efficacy - >130LPW / 150 LPW
- Mains current - 180W – 0.86A / 200W – 0.96A / 250W – 1.20A