

## BLADE STAND ALONE WORKSTATION

Includes Add-ons [A1](#) | [A4](#) | [A5](#) | [A6](#) | [A7](#) | [A8](#) | [A9](#)

\*General Guide | See Master Plan

## EDITION CODE

BL-1 - BLADE Stand-Along Workstation.....	1
Optional Surface Support.....	3

### Add-Ons

A1 - BLADE Cable Tray (Surface Mounted).....	4
A4 - Modesty Panel .....	7
A5 - Laminate Inset End Panels.....	9
A6 - Laminate Surface-Height End Panels.....	11
A7 - Laminate Divider-Height End Panels .....	11
A8 - Steel Inset End Panels .....	13
A9 - Transaction Counter .....	15

## PARTS LIST



QTY	PRODUCT CODE
2	BL30/BL24
1	BLPB#
1	Main Surface
1	BASB72 (*will be added if surface is 72" or larger)

\* Process will repeat for all individual desks

## 1 | JOIN END LEGS WITH BEAM



Insert the beam tabs into the leg brackets.

Guide the beam tabs into the bracket holes, ensure that there is no gap between the beam and legs. Using a rubber mallet, hammer the beam to lock in place.



## 2 | BOLT DOWN BEAM-TO-LEG LOCK PLATE


**Note:** The beam lock plates will not fit if there is a gap between the beam and the leg.



### 3 | MEASURE AND ADJUST BEAM WIDTH


Measure from end leg to end leg until you find the approximate width of the work surface. Insert the screw through the overlapping beam slots and into the black plastic piece. Slightly tighten the screw, **DO NOT** fully tighten.

Insert Beam Grommet Covers.

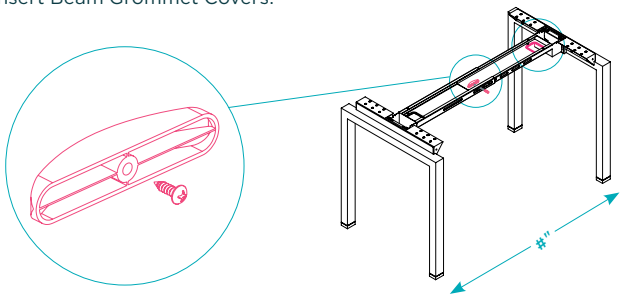



### 4 | SECURE THE SURFACE

Position the surface on the desk frame. Align the outer sides of the surface flush and parallel with the outer sides of the end legs, adjust if not flush. Insert wood screws into the leg brackets and secure to the underside of the surface.

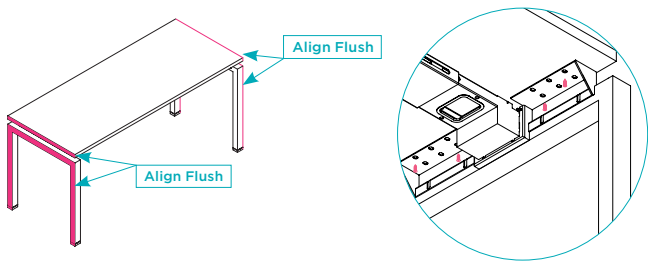


## 5 | FINAL STEPS

Insert final wood screws and tighten beam locks




## OPTIONAL | INSTALL ANTI-SAG BAR

If your surface is 72" or larger, use 10 wood screws to install the anti-sag bar to the underside of your surface.

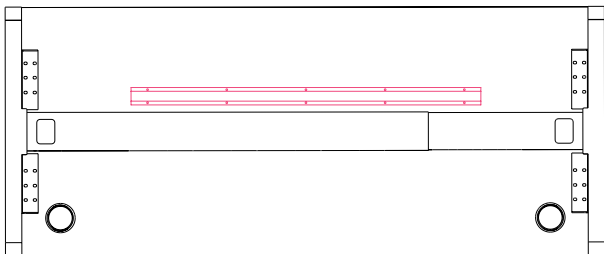

## PARTS LIST



QTY	PRODUCT CODE
1	BCTSM (set of 2)
1	BTEC or BNTEC (set of 2) *if applicable




IF WORKSTATIONS HAVE POWER, REFER TO **BL-8** BLADE POWER GUIDE

## 1 | ATTACH TRAY HANGERS AND END CAPS\*


Align slots on the cable tray and secure with two bolts from the bottom. These hangers will mount to a blade workstation. Insert Beam Grommet Covers.

**\*NOTE:** End Caps (BTEC) are optional, follow the same install process with or without end caps.

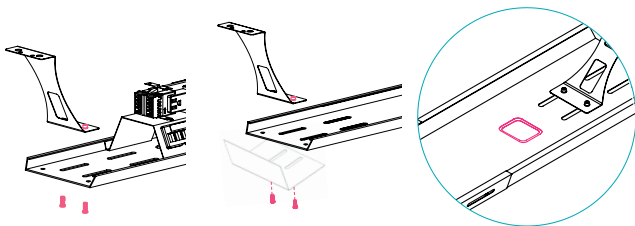

## 2 | INSERT BEAM LOCK

Adjust BLADE cable tray to approximate width of surface. Insert the screw through the overlapping beam slots and into the black plastic piece. Slightly tighten the screw with only a few turns. **DO NOT** fully tighten.

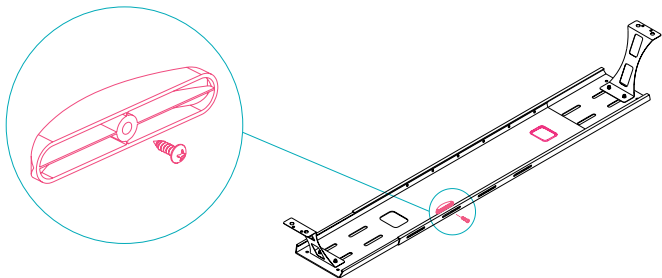




### 3 | SURFACE MOUNT CABLE TRAY

Align cable tray flush to the edge of the surface (on 24" or 30" surfaces). Insert wood screws through the hangers and into the underside of the surface.


Tighten beam lock.

**NOTE:** Position may be affected if modesty panel is being installed.

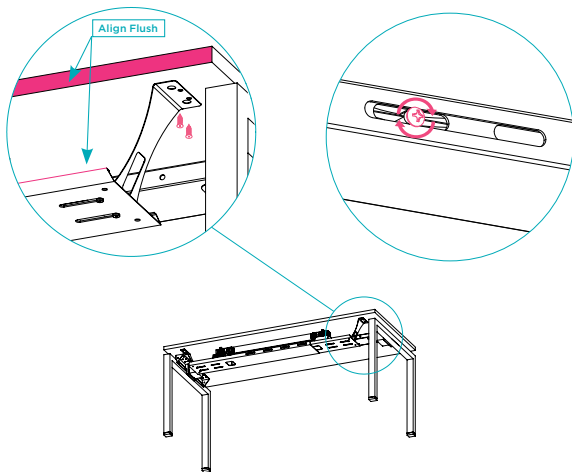

IF WORKSTATIONS HAVE POWER, REFER TO **BL-8** BLADE POWER GUIDE

## PARTS LIST



QTY	PRODUCT CODE
1	Bracket (one set)
1	BMP##/GLMP##


\* Process is the same for steel and laminate

## 1 | SECURE BRACKET TO MODESTY PANEL

Using 4 machine screws, secure brackets to the back of the steel modesty panel.

Using 4 wood screws, secure brackets to the back of the laminate modesty panel.


**NOTE:** Holes are not pre-drilled on laminate panels.

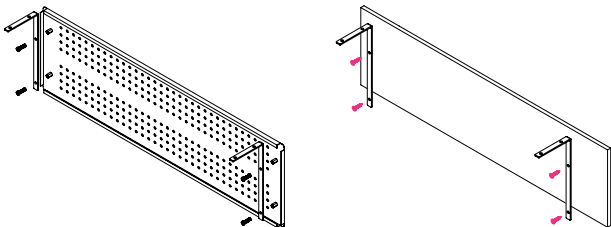


## 2 | ATTACH MODESTY PANEL TO WORKSTATION

Center the panel in reference to the width of the surface and screw modesty panel directly to the bottom of your surface with wood screws.

**NOTE:** Bracket may pass under the grommet, in this case, use wood screws at the end of the bracket.

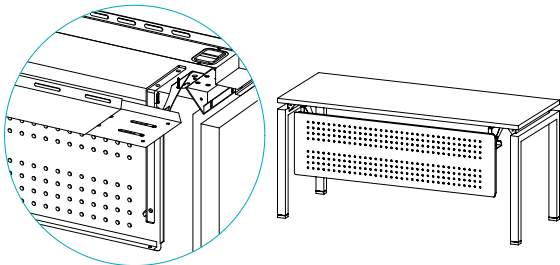

### PARTS LIST




QTY	PRODUCT CODE
4	LEPBL1
1	GBEP##

\* Quantities are for one panel

## 1 | SECURE BRACKET TO END LEGS


Attach two brackets to each BLADE end leg using the self-tapping screws.

1. Inset – The back of the bracket will align flush with edge of the leg.
2. Flush – The back of the bracket will be  $\frac{9}{16}$ " from the edge back edge of the leg.

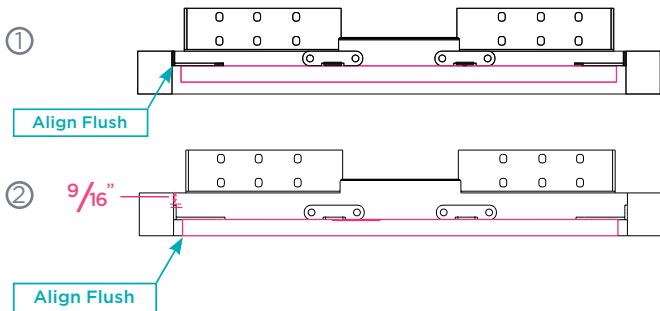


## 2 | ATTACH END PANEL

Slide end panels into place and adjust until flush with bracket. Use 2 wood screws to secure panel to each bracket.

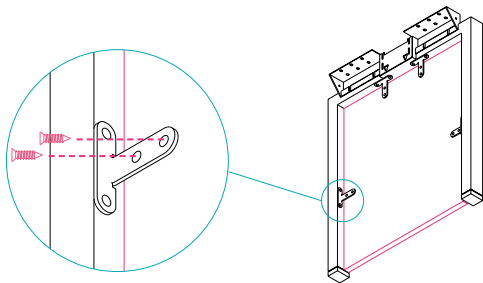

## END PANELS

BL-1 | A6 & A7



### PARTS LIST


QTY	PRODUCT CODE
4	LEPBL1
1	GBEPLH## or GBEPSS##

\* Quantities are for one panel

## 1 | SECURE BRACKET FOR OUTER PANELS TO END LEGS


Attach 4 brackets to each BLADE end leg using the self-tapping screws.

The front of the bracket will align flush with outside edge of the leg.

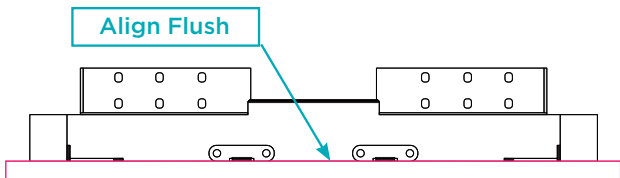


## 2 | ATTACH END PANEL

Slide end panels into place and adjust until flush with bracket. Use 2 wood screws to secure panel to each bracket.

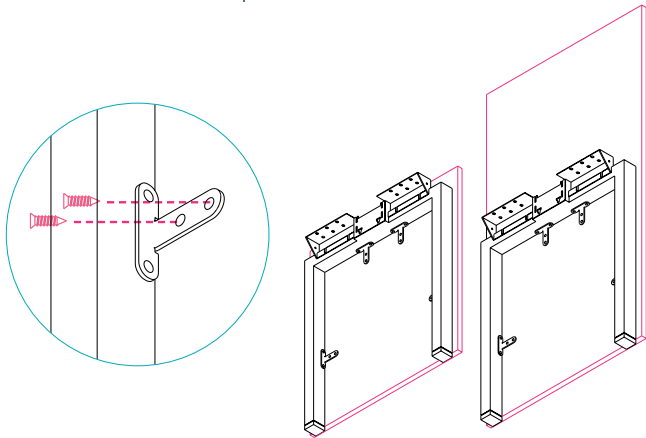

### PARTS LIST




QTY	PRODUCT CODE
1	BEP##

\* Quantity is for one panel




## 1 | SECURE PANELS TO END LEGS

Slide the end panel into place and adjust until either flush with outside of leg or slightly recessed.

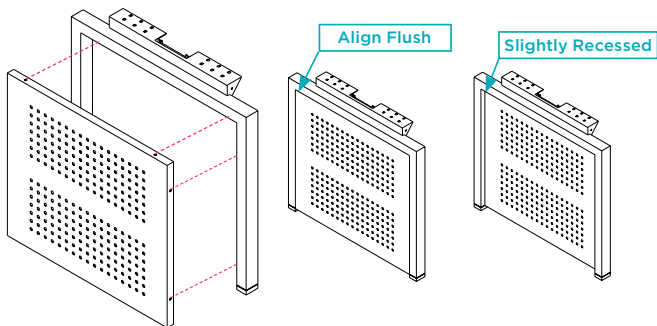


## 2 | ATTACH END PANEL

Use 4-6 self-tapping screws to secure panel to each leg.

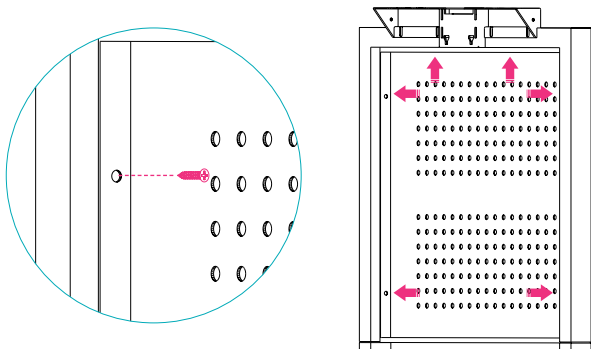

## PARTS LIST




QTY	PRODUCT CODE
1	<p>KIT-GTC1259</p> <p>Includes: 1 Frosted Iass Transaction Counter, 1 Threaded Rod, 3 Stainless Steel Tubes, 3 C-Cover, 3 C-Bases</p>

## 1 | THREAD ROD INTO GLASS

Place glass facing upward and thread the rod into the pre-installed glass fittings.


**NOTE:** Repeat for all three rods.

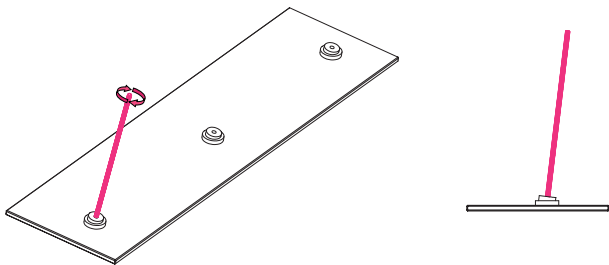

## 2 | SLIDE STAINLESS STEEL TUBE OVER ROD

Lower the tube over the threaded rod and position the to rest flush over the glass fitting.


**NOTE:** Repeat for all three stainless steel tubes.

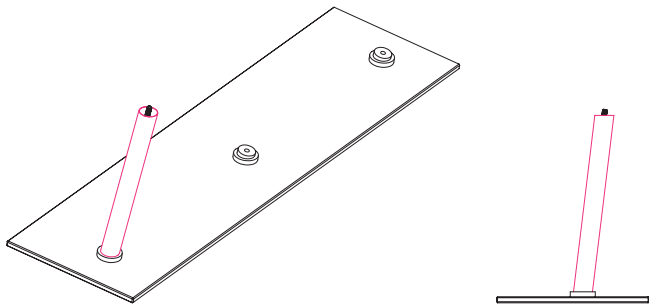

### 3 | SLIDE BASE COVER OVER TUBE

Lower the base cover over the tube and let it rest on top of the glass fitting.


**NOTE:** Repeat for all three base covers.

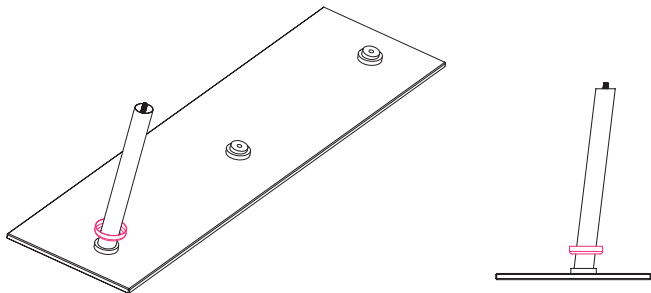

### 4 | SLIDE BASE INTO TUBE AND TIGHTEN



Place the base fitting into the end of the tube, make sure it is flush. Thread the nut onto the exposed threaded rod and tighten.

**NOTE:** Repeat for all three base fittings.

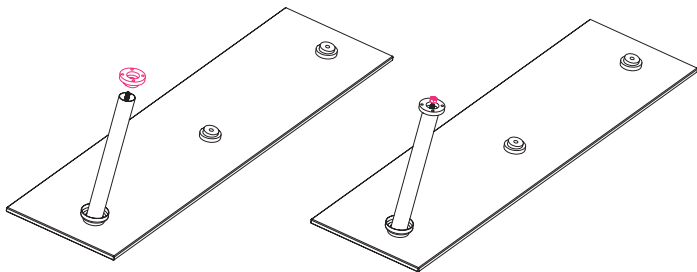

## 5 | MARK PLACEMENT OF COUNTER


Align counter to center of surface and mark approximate area for mounts using 3 strips of tape. Use a measuring tape to mark 5" from the surface edge on each piece of tape.

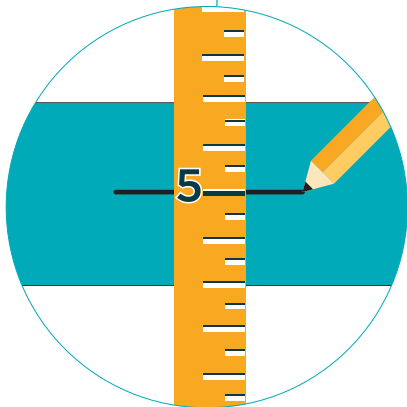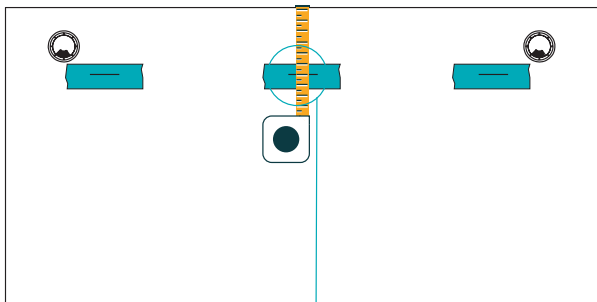

## 6 | PLACE STAND ON TAPE MARKS AND ALIGN

Align the front edges of the stand bases with the marks on the tape. Insert 1 wood screw through the center stand and remove tape. Reposition the two outer stands to their aligned marks (if needed).

Secure each stand with 4 wood screws each.

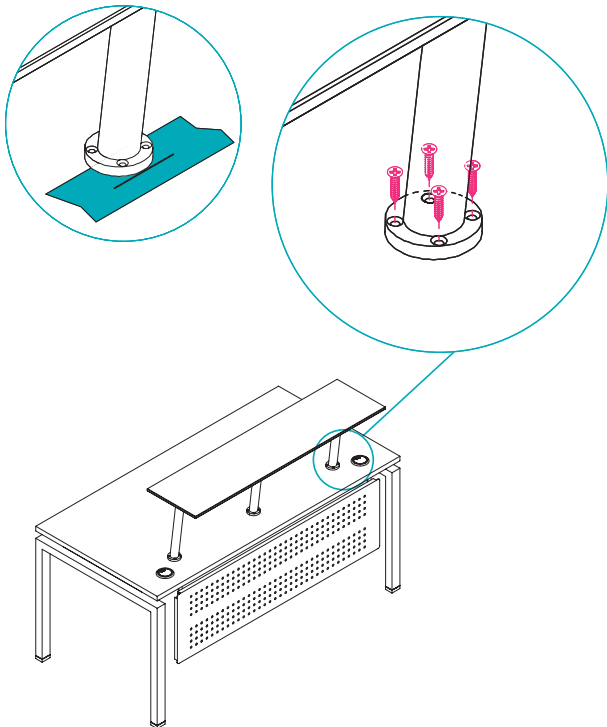





Workspace made easy

210.648.2095 | [mycleardesign.com](https://mycleardesign.com)

© 2021 Clear Design. All rights reserved.