

Crompton

Lighting



Capricornus Pro & Capricornus

Industrial Glass Highbay



Crompton Greaves Consumer Electricals Limited
05GBD, Godrej Business District, Pirojshanagar,
Vikhroli (West), Mumbai, Maharashtra - 400079, India
Customer Care No. : +91 9228880505 | www.crompton.co.in
Email: consumer.support@crompton.co.in



Light at its best.
Efficiency at its best.



Made from high power, premium grade LED housed in die cast aluminum powder coated luminaire. A highbay enclosed in a heat resistant 4mm thickness toughened glass cover. It is reliable and secure for industrial application, available with an added safety chain.

The best of everything



5 Way 10A LILO connector for terminating max.2.5 sq mm incoming cable



>130 Lm/W and >145 Lm/W lumen efficacy, with 60° beam angle



Die cast aluminum powder coated housing



Additional precaution provided with safety chain



High power premium grade LED having 100,000 burning hours



EMI/EMC compliant, BIS approved potted driver






Heat resistant 4mm thick toughened glass



Added surge protection of 10KV along with 5KV for extra safety

Application Areas

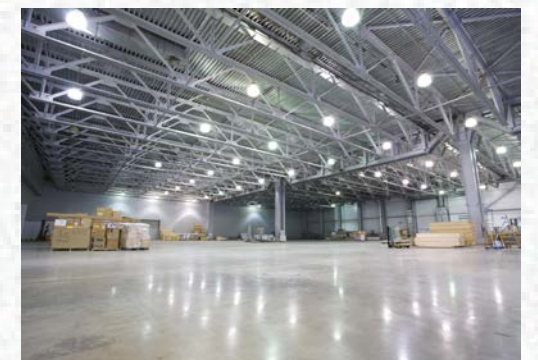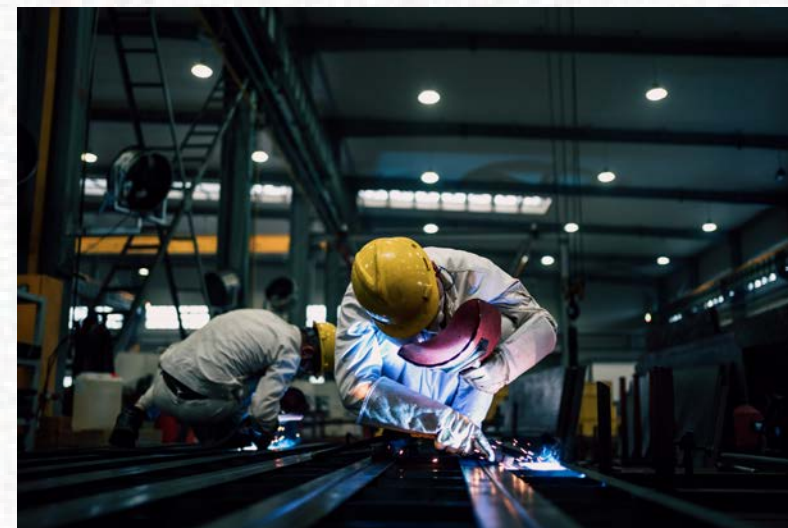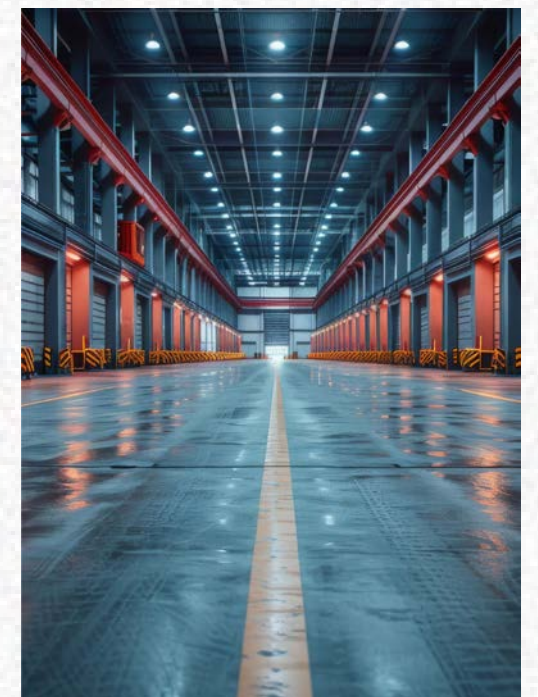



Technical Specifications



Wattages
80W / 100W / 120W /
150W / 200W / 250W



Efficacy
>130 Lm/W,
>145 Lm/W



Warranty
2-5 Years



Ingress
IP66



Impact
IK08



CRI
70

K

CCT
5700 K



THD
<10%

P.F

≥0.95

Nominal wattage (W)	CRI	Mains current (A)	Approx weight (Kg) ± 10%	Lumen Efficacy (Lm/W)
---------------------	-----	-------------------	--------------------------	-----------------------

CIP-334-80-57-60D-HL3-GL-NGG

80	70	0.350	2.46	≥130
----	----	-------	------	------

CIP-334-100-57-60D-HL3-GL-NGG

100	70	0.435	2.46	≥130
-----	----	-------	------	------

CIP-335-120-57-60D-HL3-GL-NGG

120	70	0.526	2.46	≥130
-----	----	-------	------	------

CIP-335-120-57-60D-HL3-GL-NGG

150	70	0.657	2.46	≥130
-----	----	-------	------	------

CIP-336-180-57-60D-HL3-GL-NGG

180	70	0.830	4.90	≥130
-----	----	-------	------	------

CIP-336-180-57-60D-HL3-GL-NGG

200	70	0.877	4.90	≥130
-----	----	-------	------	------

CIP-336-180-57-60D-HL3-GL-NGG

250	70	1.09	4.90	≥130
-----	----	------	------	------

TIP-334-80-57-60D-HL3-GL-NSG

80	70	0.350	2.46	≥130
----	----	-------	------	------

TIP-334-100-57-60D-HL3-NS-GL-NGG

100	70	0.435	2.46	≥130
-----	----	-------	------	------

TIP-335-120-57-60D-HL3-NS-GL-NSG

120	70	0.526	2.46	≥130
-----	----	-------	------	------

TIP-335-150-57-60D-HL3-NS-GL-NSG

150	70	0.657	2.46	≥130
-----	----	-------	------	------

TIP-336-180-57-60D-HL3-NS-GL-NSG

180	70	0.830	4.90	≥130
-----	----	-------	------	------

TIP-336-200-57-60D-HL3-NS-GL-NGG

200	70	0.877	4.90	≥130
-----	----	-------	------	------

