

## THINK Desk

### Sit-to-Stand Workstation

Includes Add-Ons: [A1](#) | [A2](#) | [A3](#) | [A4](#)

---

General Installation Guide



Watch Entire  
Install Video




## **Edition Code**

BP-1 :: Power Setup.....	1
BP-1 :: Workstation.....	13

## **Add-ons**

A1 :: Return Surface.....	25
A2 :: Adjustable Panel Brackets .....	33
A3 :: Beam-Mounted Divider Clippers.....	37
A4 :: Steel End Panel.....	41

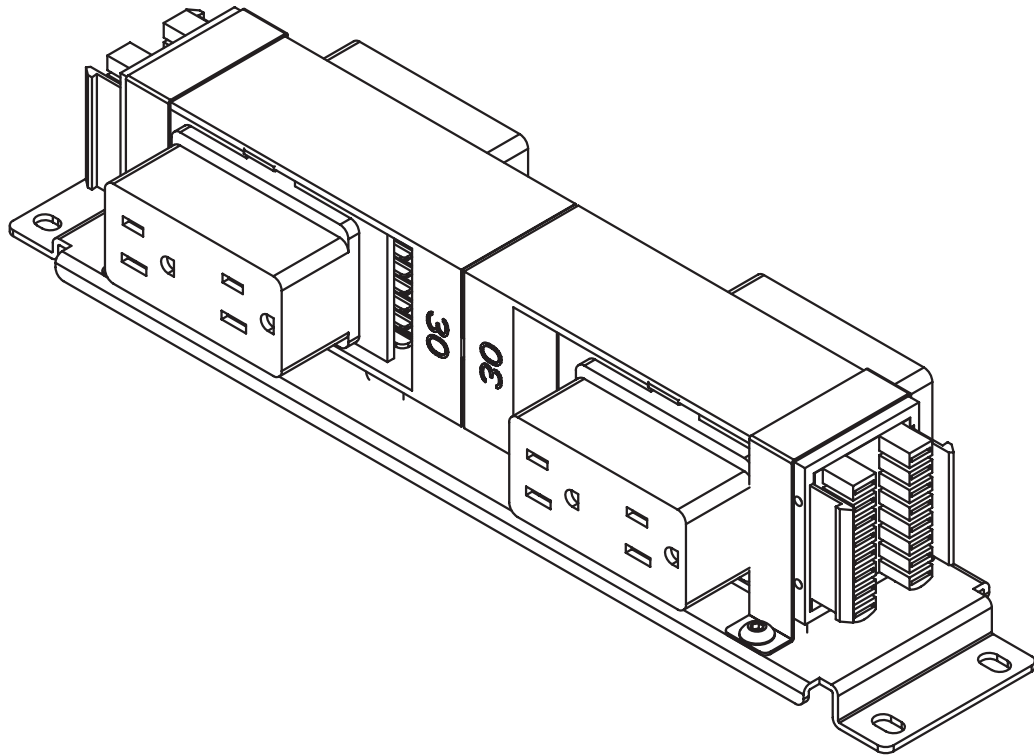


## Power for 48" Workstation

### Overview

---










THINK Sit-to-Stand Workstation

 Quantities are for a single workstation. Parts may vary depending on project, but install steps will remain the same.



Scan to  
Watch Section

## Parts List


Code	Qty.	Description	
BPROTPB	1	Module Mounting Plate (Short)	
	2	Power Module Bracket	
	1	Power Beam	
	4	Machine Screw	
	4	Machine Screw	
	1	Power Beam Plate	
PRODB	1	Double Power Block	
PROR	4	Duplex Receptacle	
PROJ	1	Jumper	

## 1 | Attach Duplex Receptacles to Double Power Block

With duplex receptacle tab on top, slide receptacle towards outside of double power block securing within block section. Duplex receptacle tab will snap and lock into place. Repeat for all sides.



Scan to  
Watch Step

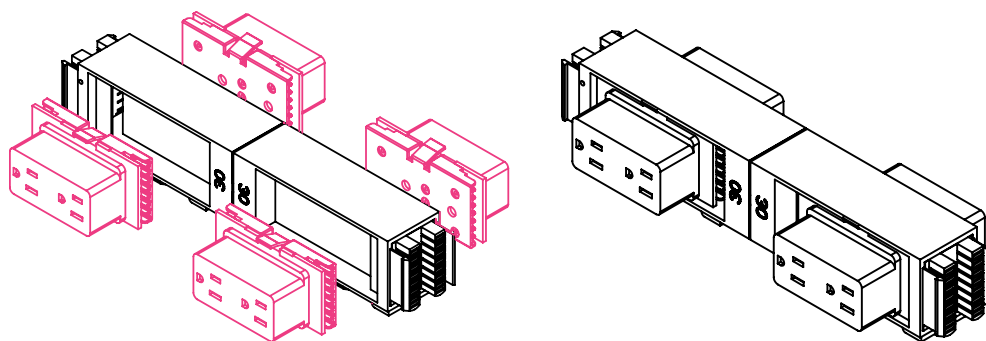


## 2 | Attach Power Assembly to Module Mounting Plate

Place power module on top of module-mounting plate. Slide first power module bracket over power module. Secure with 2 screws. Repeat for other bracket.



Scan to  
Watch Step

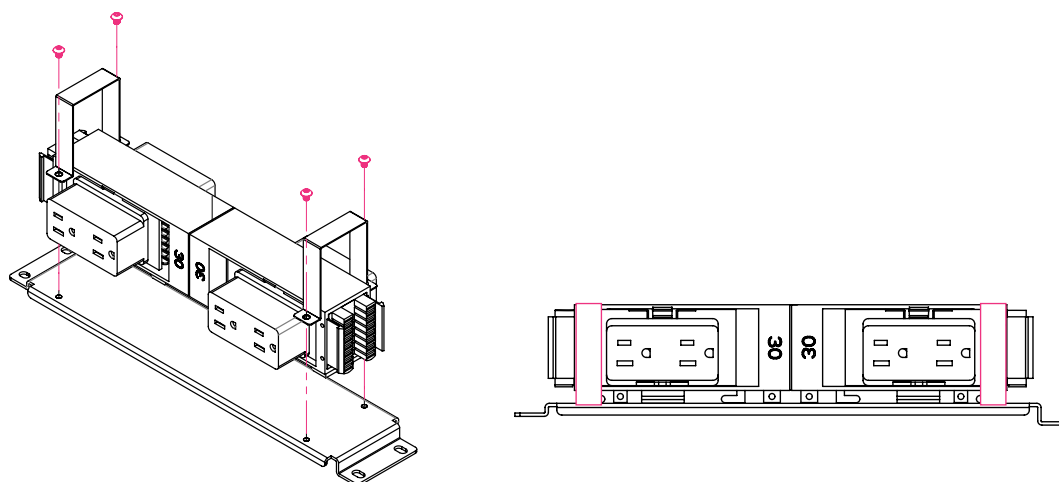


**Note:** Do not over torque screws.

### 3 | Connect Jumper to Power Assembly

Determine where the bigger jog is located on mounting plate and connect thicker end of jumper to any one of the double power block prongs.



Scan to  
Watch Step

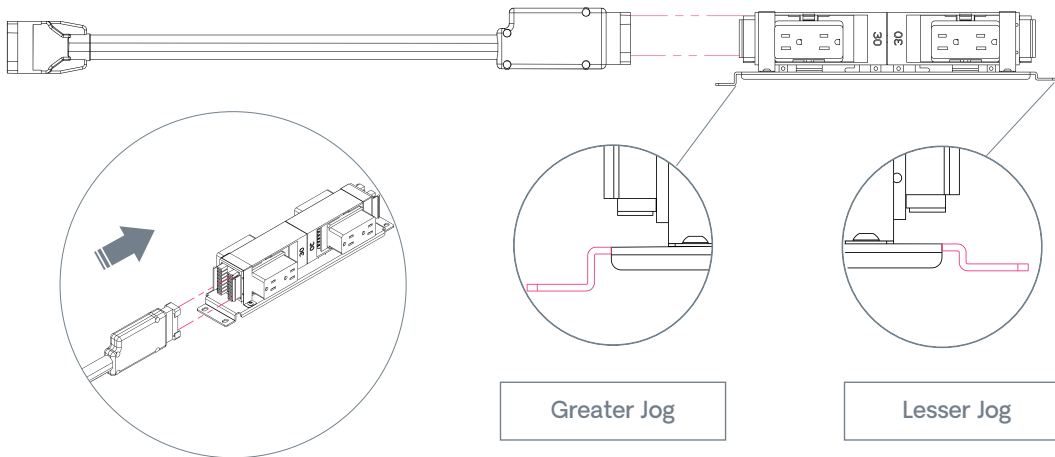


### 4 | Assemble Power Beam

Remove both magnetic strips and place to side. Slide inner beam inside of outer beam and adjust accordingly.



Scan to  
Watch Step

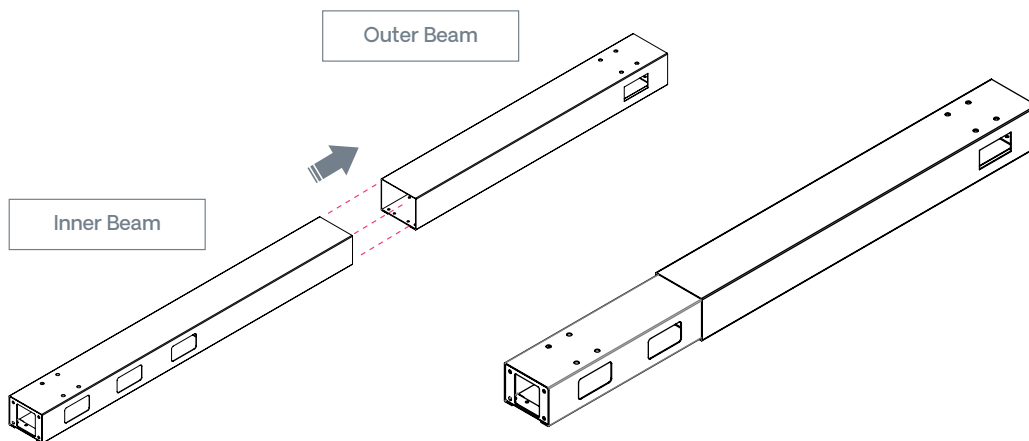


## 5 | Insert Assembled Power into Power Beam

Insert and guide jumper through opposite end of beam. Pull jumper out from other side. Connect mounting plate to power beam using 4 screws. Place both magnetic strips back on power beam.



Scan to  
Watch Step

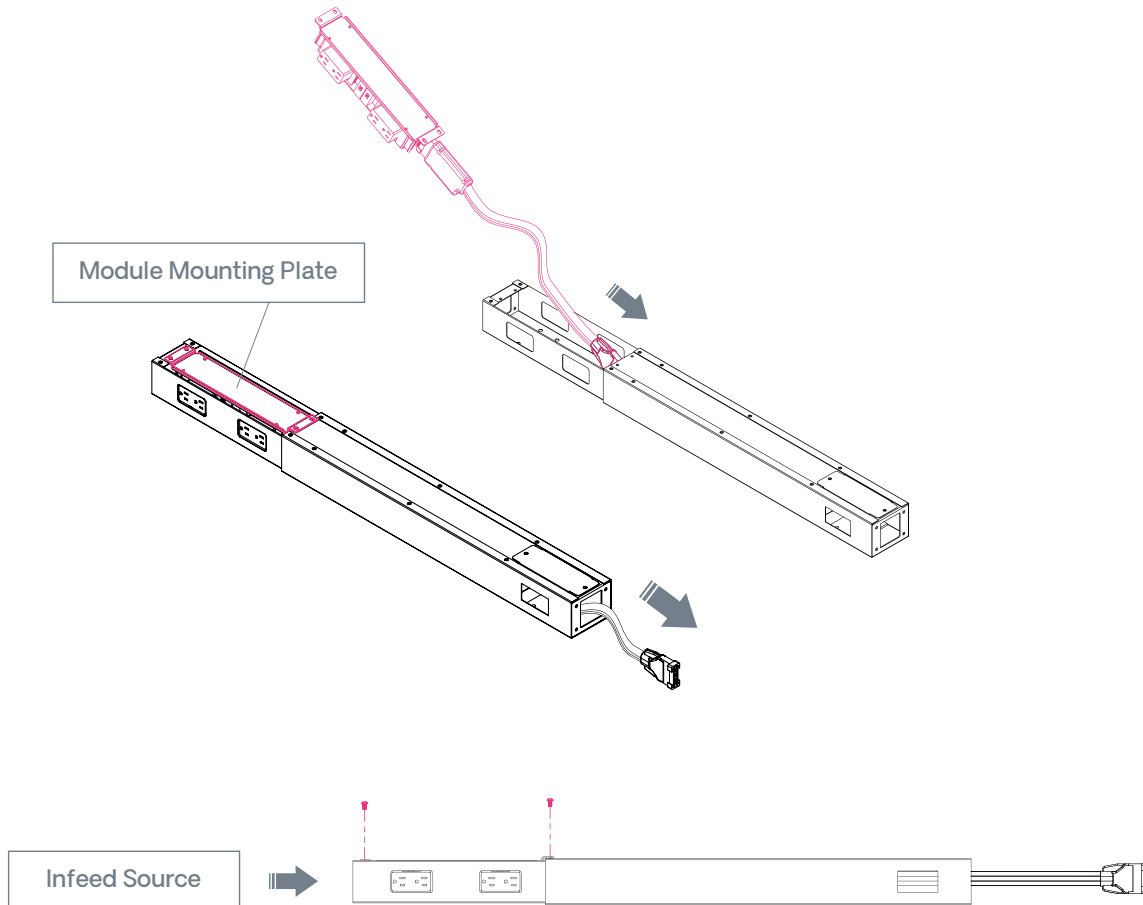



## Optional | Power Beam Plate

Only install if data is not being used. Disregard otherwise.



Scan to  
Watch Step

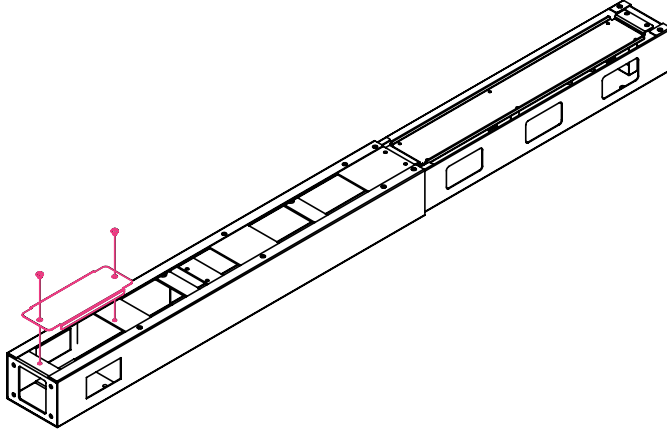

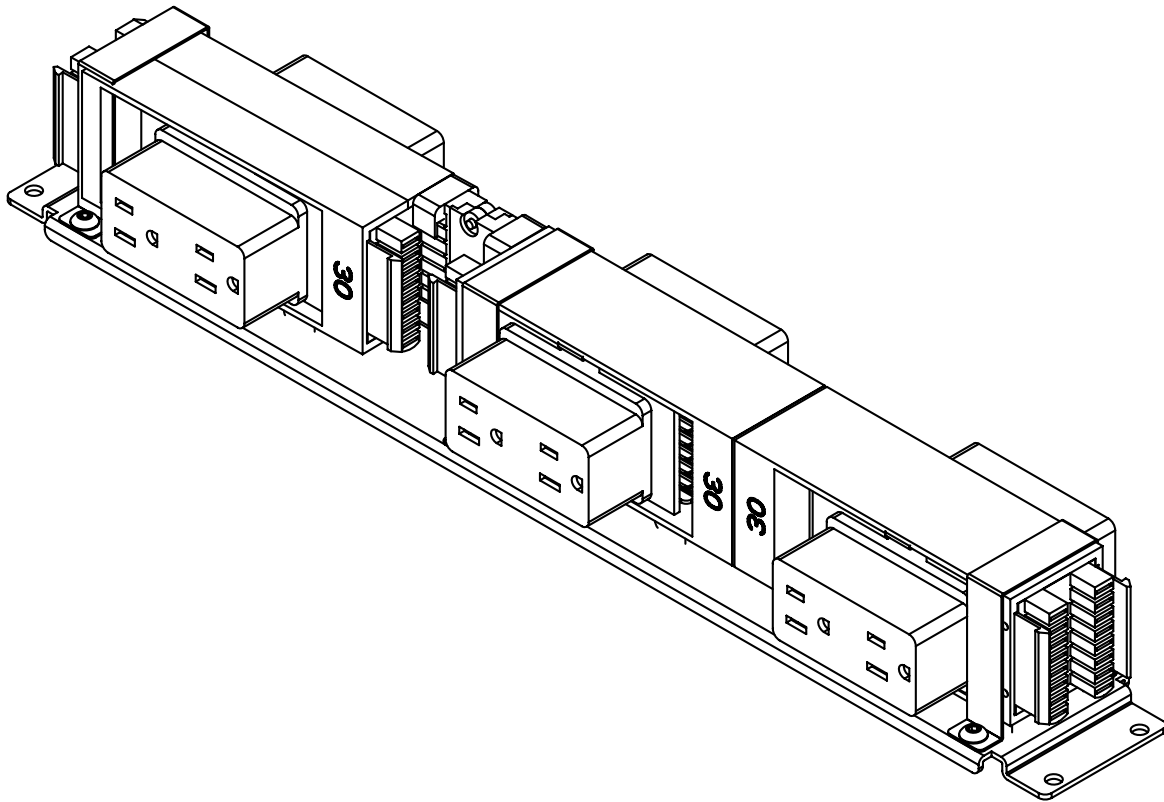

## Power for 54"–72" Workstations

### Overview












THINK Sit-to-Stand Workstation

**!** Quantities are for a single workstation. Parts may vary depending on project, but install steps will remain the same.



Scan to  
Watch Section

## Parts List


Code	Qty.	Description	
BPROTPB	1	Module Mounting Plate (Long)	
	3	Power Module Bracket	
	1	Power Beam	
	4	Machine Screw	
	6	Machine Screw	
	1	Power Beam Plate	
PRODB	1	Double Power Block	
PROSB	1	Single Power Block	
PROBC	1	In-Line Power Block Connector	
PROR	6	Duplex Receptacle	
PROJ	1	Jumper	

## 1 | Attach Duplex Receptacles to Power Blocks

With duplex receptacle tab on top, slide receptacle towards outside of power block securing within block section. Duplex receptacle tab will snap and lock into place. Repeat for all sides and blocks.



Scan to  
Watch Step

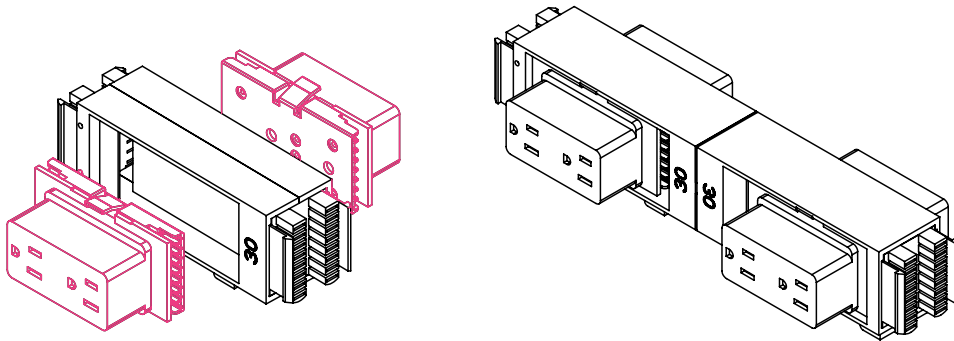


## 2 | Attach Double Power Block to Single Power Block

Using the in-line power block connector, attach double power block to single power block.



Scan to  
Watch Step

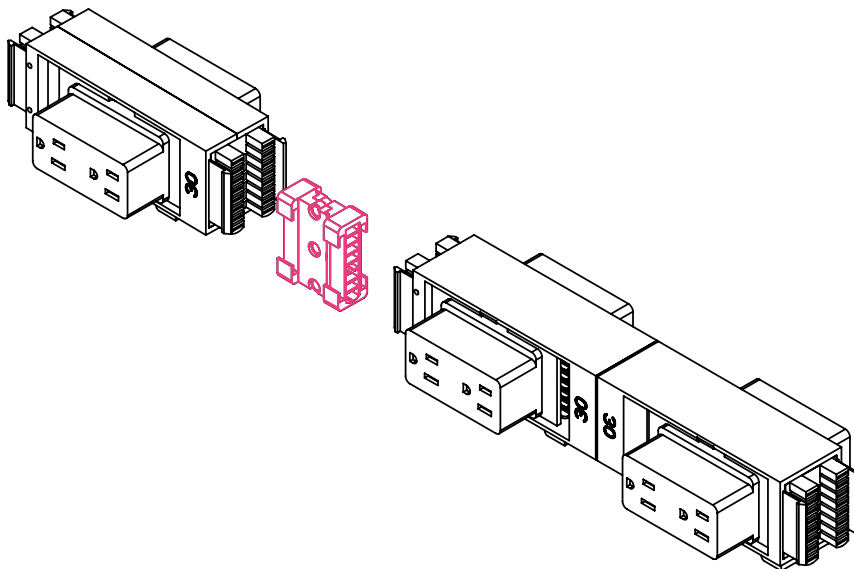


### 3 | Attach Power Assembly to Module Mounting Plate

Place power module on top of mounting plate. Slide first power module bracket over power module. Secure with 2 screws. Repeat for other brackets.

**Note:** Do not over torque screws.



Scan to  
Watch Step

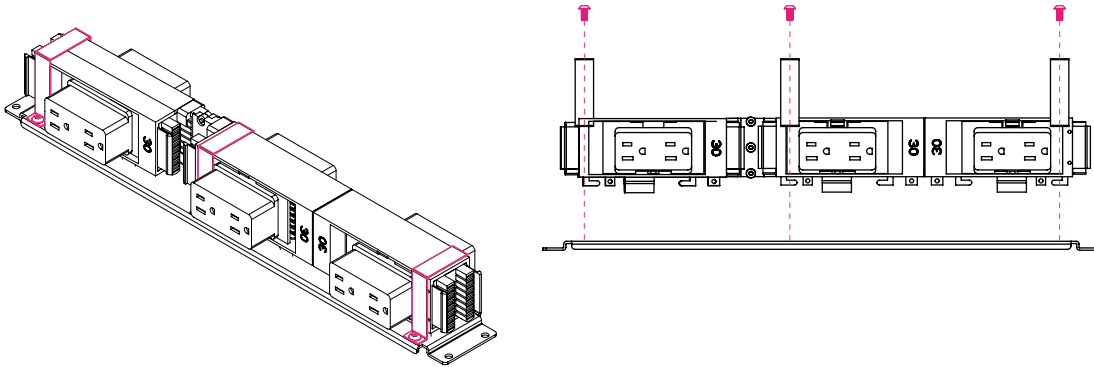


### 4 | Connect Jumper to Power Assembly

Connect thicker end of jumper to any one of the single power block prongs.

**Note:** Only connect jumper to single block.



Scan to  
Watch Step

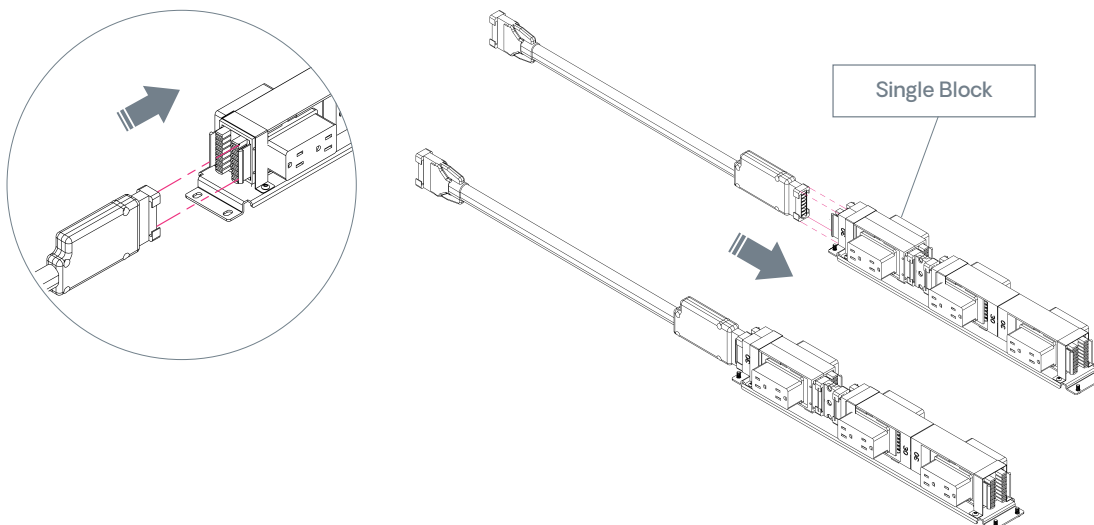


## 5 | Assemble Power Beam

Remove both magnetic strips and place to side. Slide inner beam inside of outer beam and adjust accordingly.



Scan to  
Watch Step

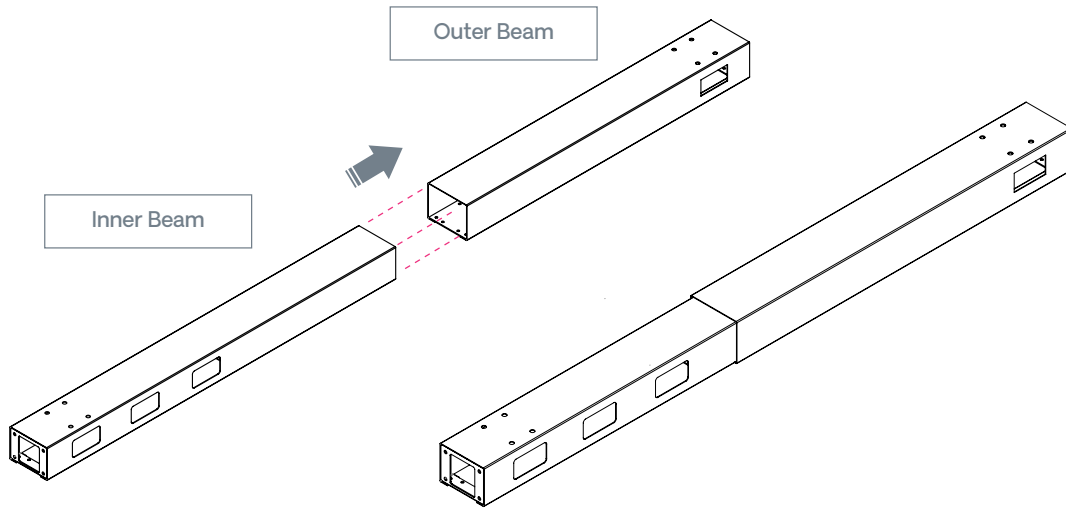


## 6 | Insert Assembled Power into Power Beam

Insert and guide jumper through opposite end of beam. Pull jumper out from other side. Connect mounting plate to power beam using 4 screws. Place both magnetic strips back on power beam.



Scan to  
Watch Step

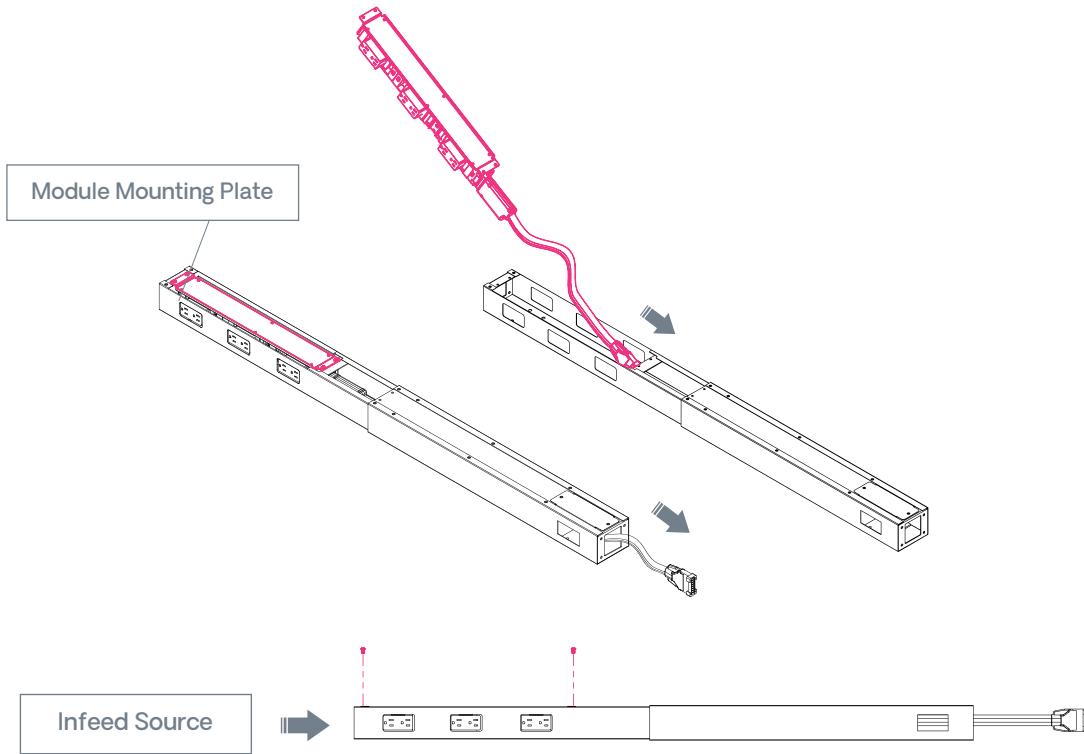



## Optional | Power Beam Plate

Only install if data is not being used. Disregard otherwise.



Scan to  
Watch Step

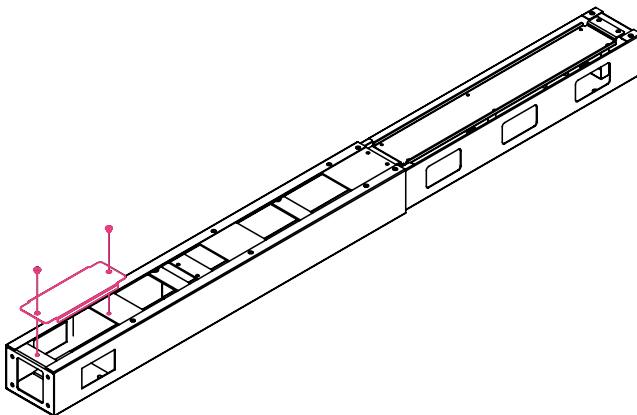

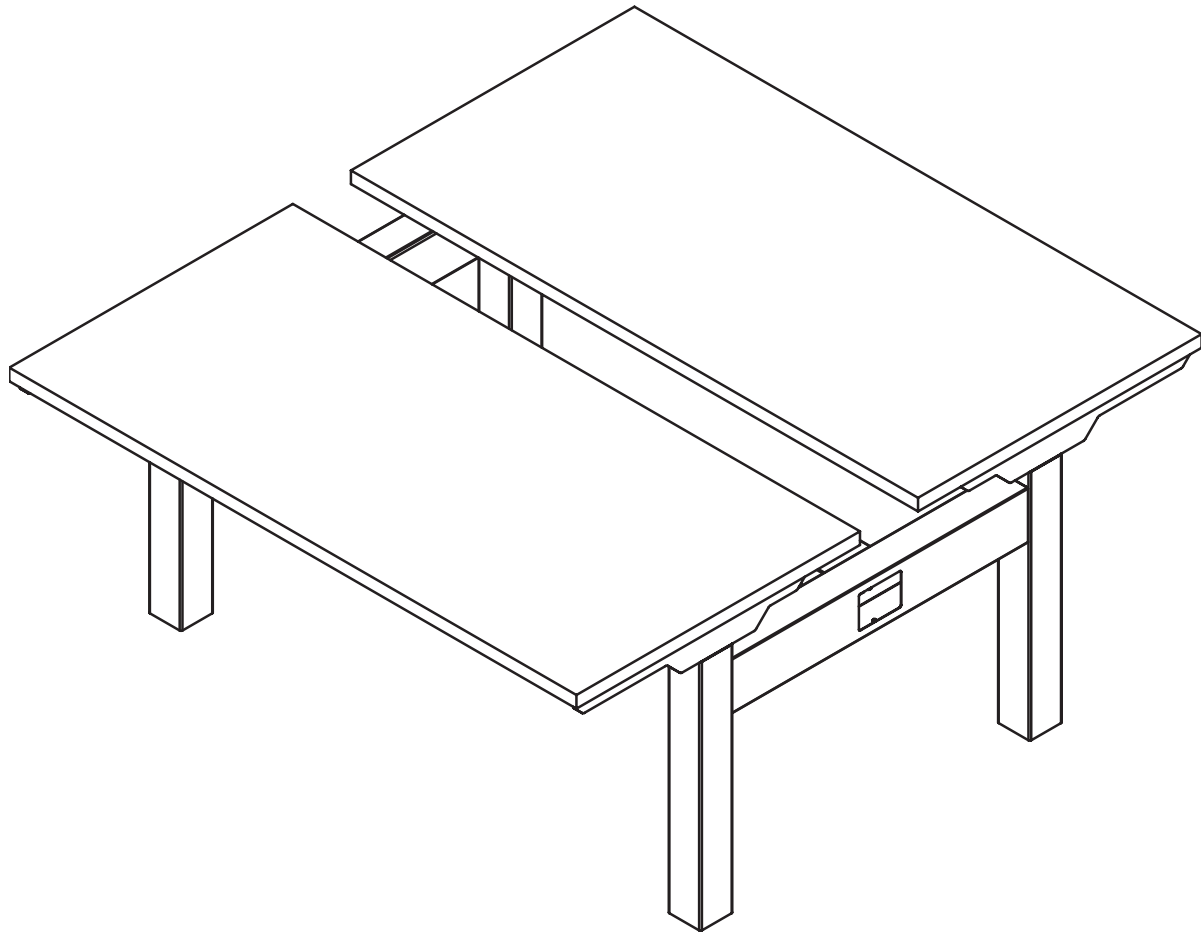


## Workstation

### Overview

---















THINK Sit-to-Stand Workstation

 Quantities are for a single workstation. Parts may vary depending on project, but install steps will remain the same.



Scan to  
Watch Section

## Parts List

Code	Qty.	Description	
BPROF	4	Adjustable Leg	
	4	Surface Attachment Bracket	
	4	Surface Support Bracket	
	2	Adjustable Surface Bracket (with Control Box)	
BPROCB	2	Cross Beam with Cover	
BPROBRG	1	Power Beam Bridge	
BPROTPB	1	Data Beam Bridge	
	1	Power Beam (Assembled)	
	1	Data Beam Set	
	6	Power-Opening Rubber Gasket	
	2	Power & Data Plastic Cover	
	8	Clipper Plastic Cover	
BD4PFP	2	Data Faceplate (4 Ports)	
GBXXXX	2	Laminate Surface	


## 1 | Secure Cross Beam to Pair of Legs

Remove cross beam cover. Then, line up pre-drilled holes on inside of beam with both mounting plate that are located on legs. Connect cross beam to each leg using 4 screws. Repeat step for other set of legs.

**Note:** Small center cutout on cross beam should be facing inward.



Scan to  
Watch Step

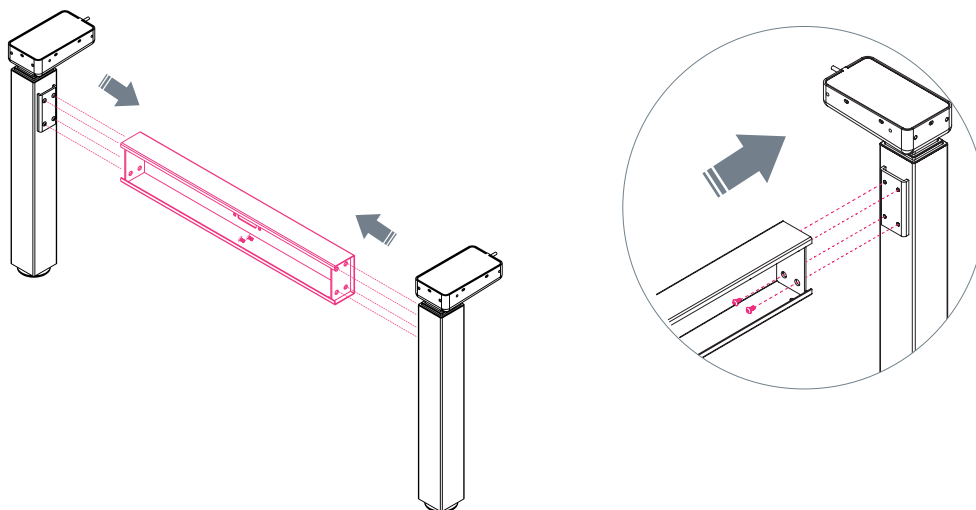


## 2 | Connect Power Beam to Both Set of Legs

Secure power beam to each cross beam using 4 screws.



Scan to  
Watch Step


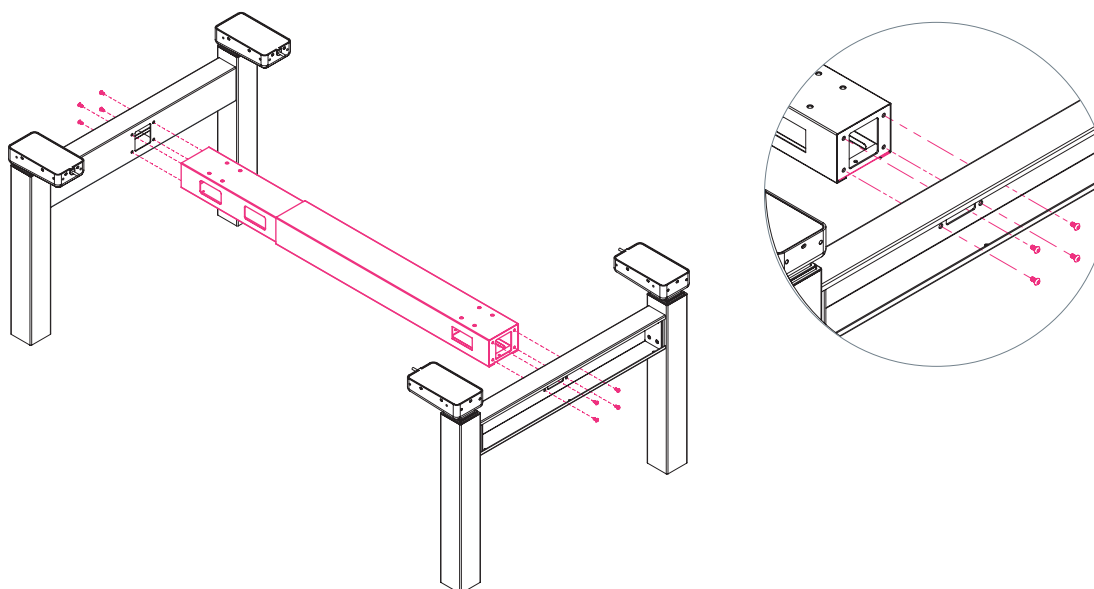


### 3 | Attach Cross Beam Covers

Align beam covers and snap into place. Secure using 3 screws.



Scan to  
Watch Step

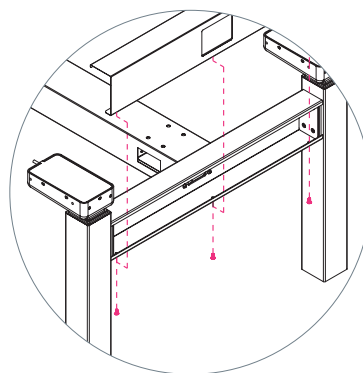
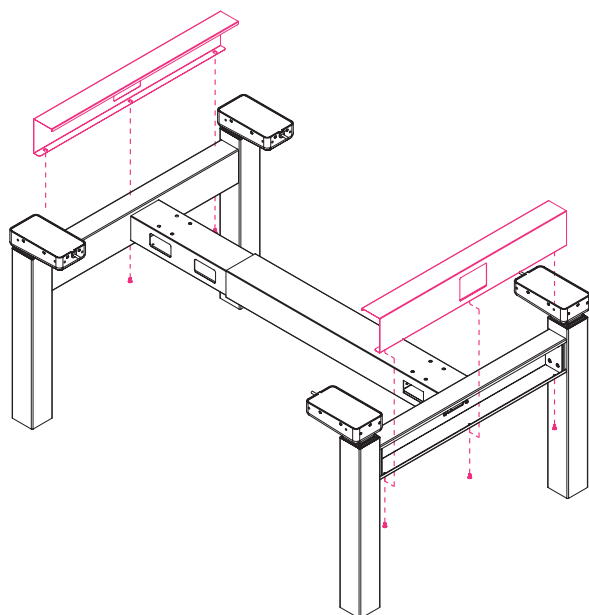


### 4 | Place Adjustable Surface Brackets on Frame

Loosen bracket screws and expand surface brackets to align with end of leg caps. Be sure all pre-drilled holes are aligned and width adjusting brackets are sitting inside frame. Secure only second hole on bracket to pre-drilled hole of inner end of foot.



Scan to  
Watch Step

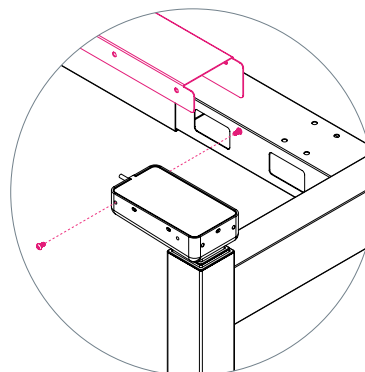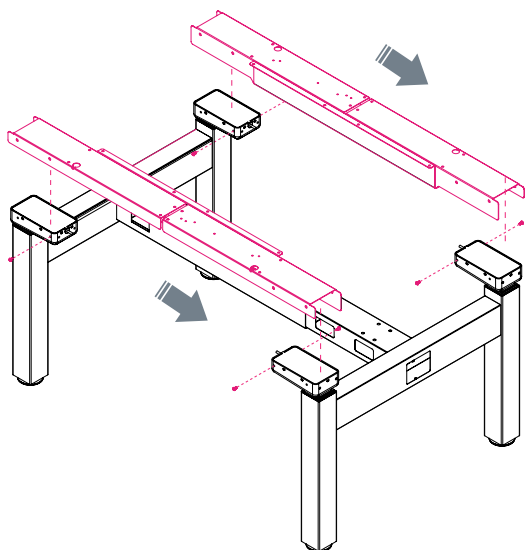


## 5 | Secure Adjustable Surface Brackets and Arm Brackets to Frame

Align pre-drilled holes of surface and arm bracket to frame and secure with 4 screws each.



Scan to  
Watch Step

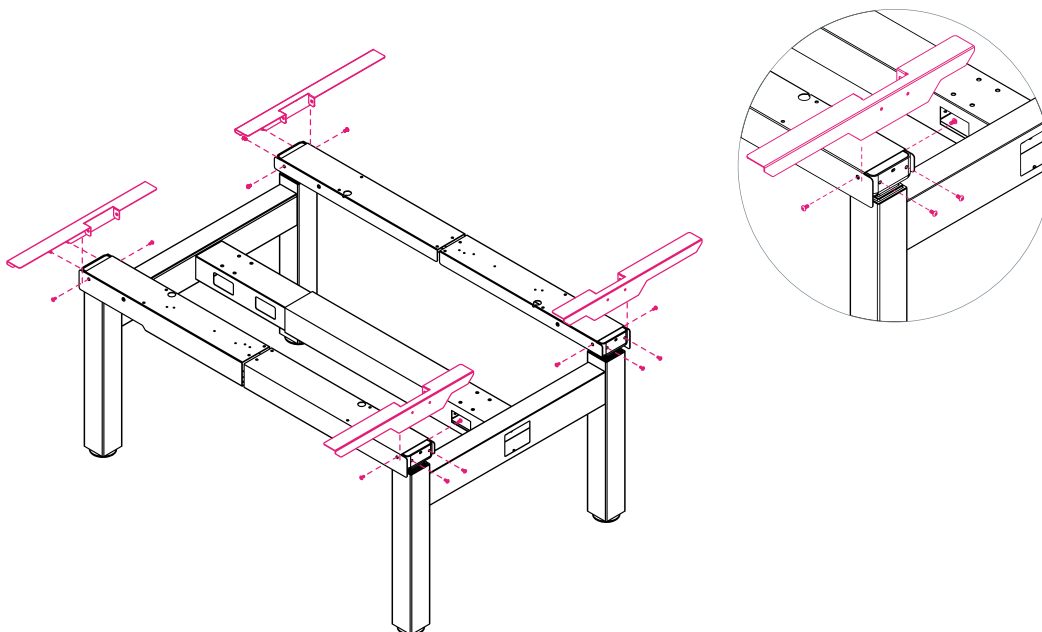


## 6 | Set Workstation Length

Measure from outer edges of legs to determine proper workstation length. Use chart below to determine the length of frame.



Scan to  
Watch Step

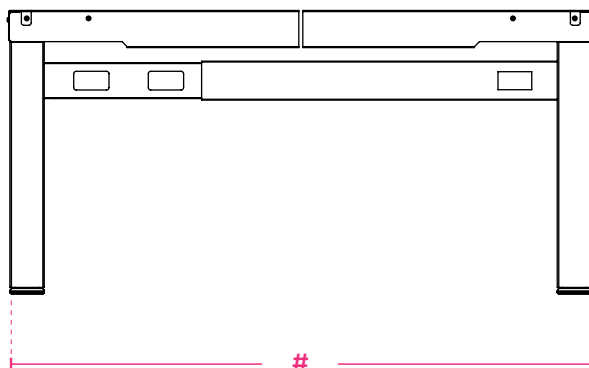

Surface Width	Frame Length #
48'	47.5'
54'	54'
60'	60'
66'	66'
72'	66'


## 7 | Secure Power Beam Width

Once length of workstation is determined, insert and secure set screws to underside of beam and tighten to secure.

**Note:** Use 2 set screws with 48" workstations and 4 set screws for all other widths.



Scan to  
Watch Step

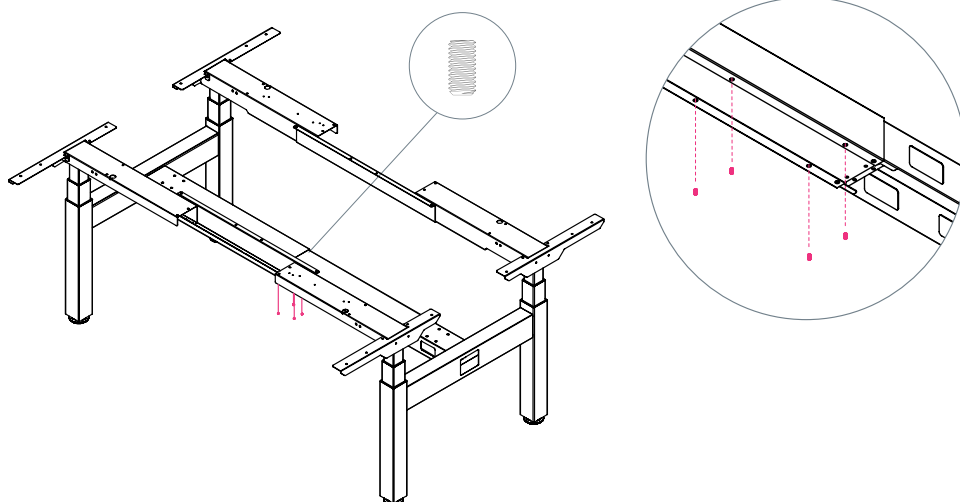


## 8 | Tighten Adjustable Surface Brackets

Using a screwdriver, tighten adjustable surface brackets to secure length.



Scan to  
Watch Step

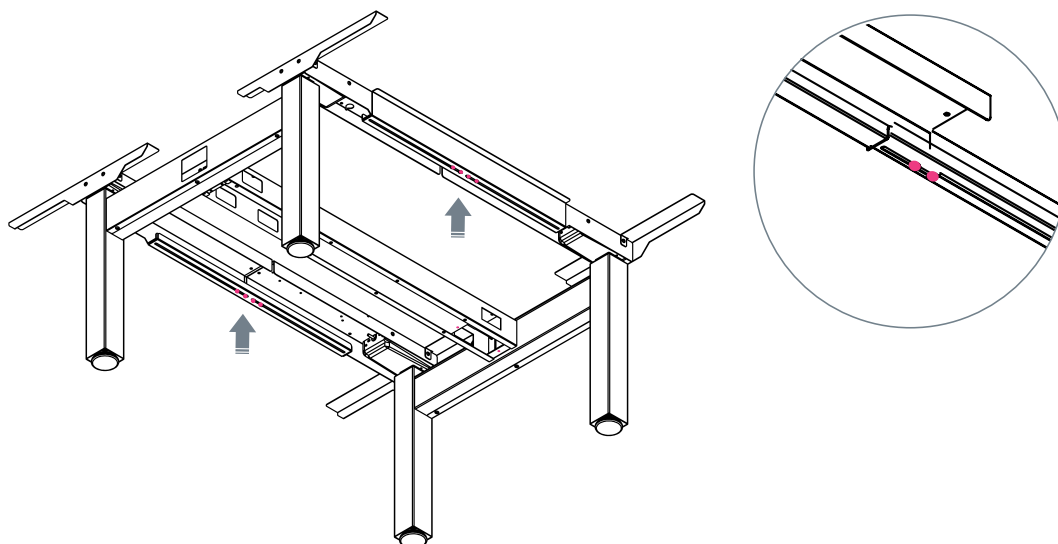


## 9 | Secure Data Tray

Position outer tray under power beam and secure. Slide inner beam into outer beam and adjust width to align with pre-drilled holes. Secure with screws.




Scan to  
Watch Step

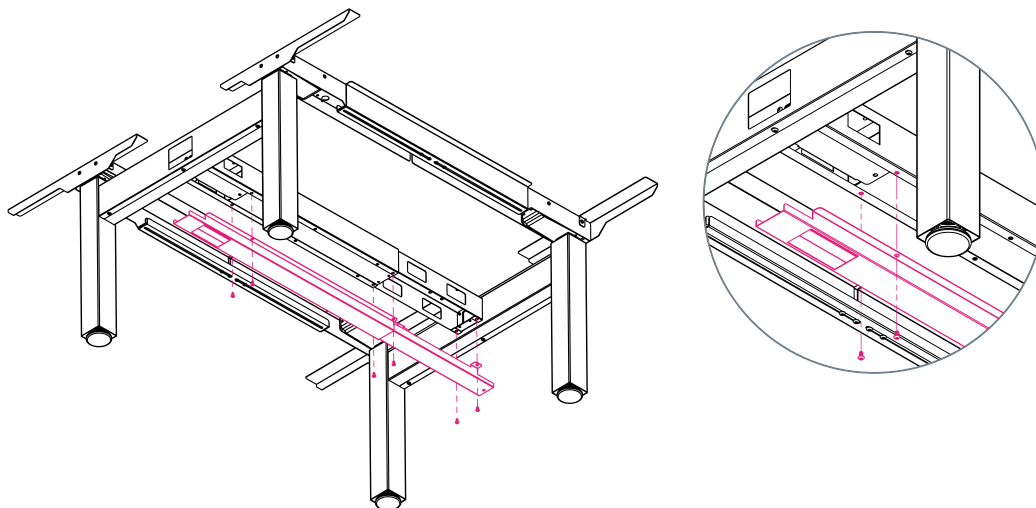

## 10 | Run Handset Cord Through Frame Notch



Scan to  
Watch Step

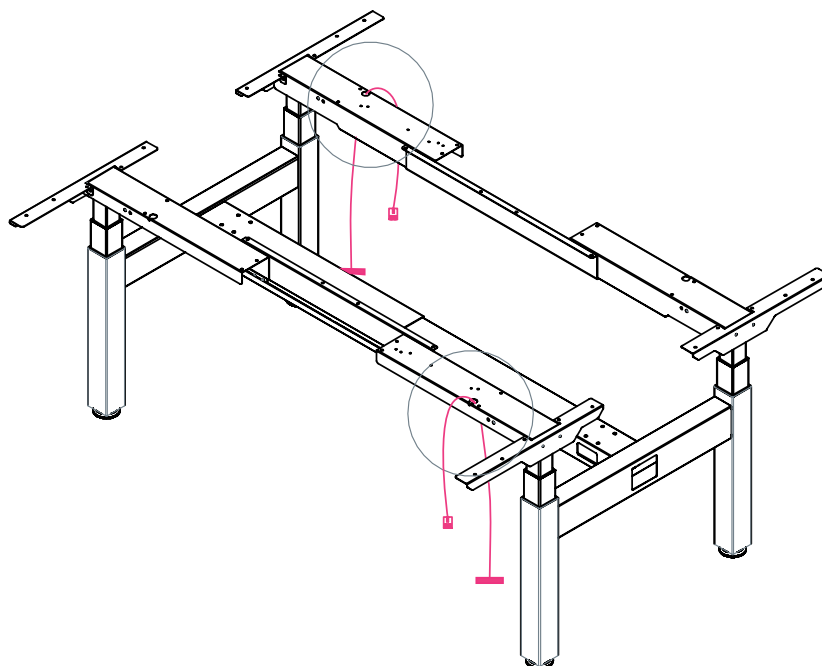


# 11 | Set Surfaces on Frame and Align


Place surfaces on frame and measure for depth of surfaces.



Scan to  
Watch Step

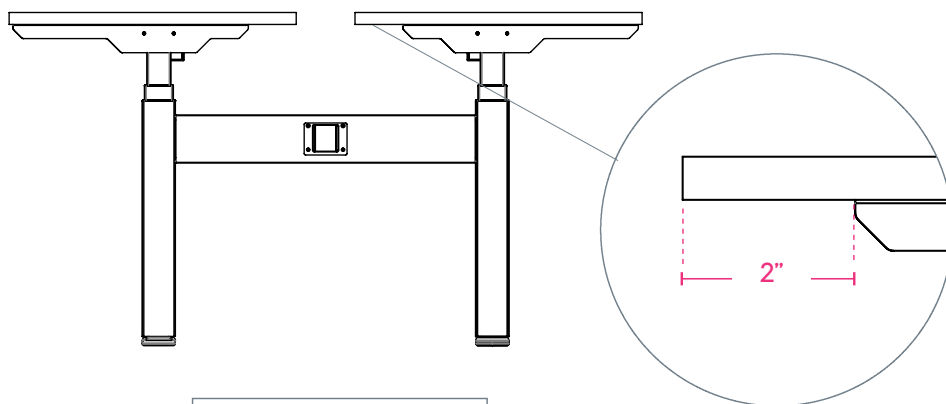

24" Deep Surface

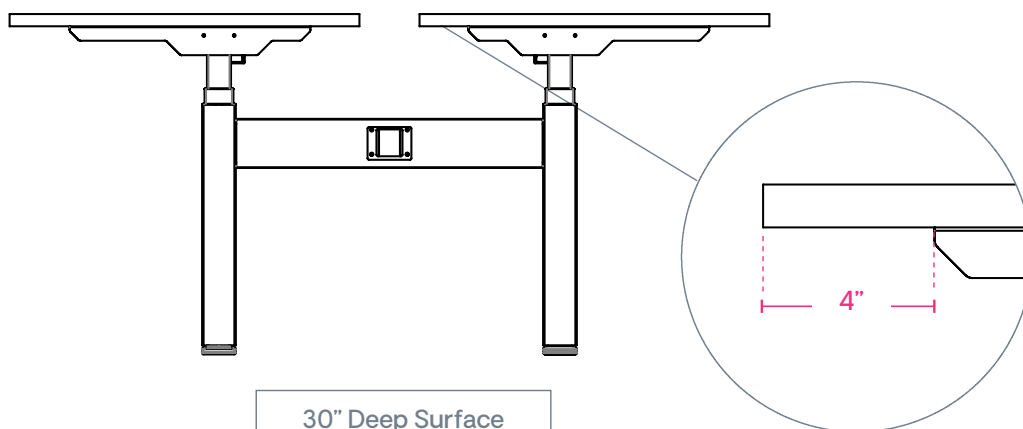


30" Deep Surface

## 12 | Attach Surface

Using wood screws provided, secure surfaces to frame.



Scan to  
Watch Step

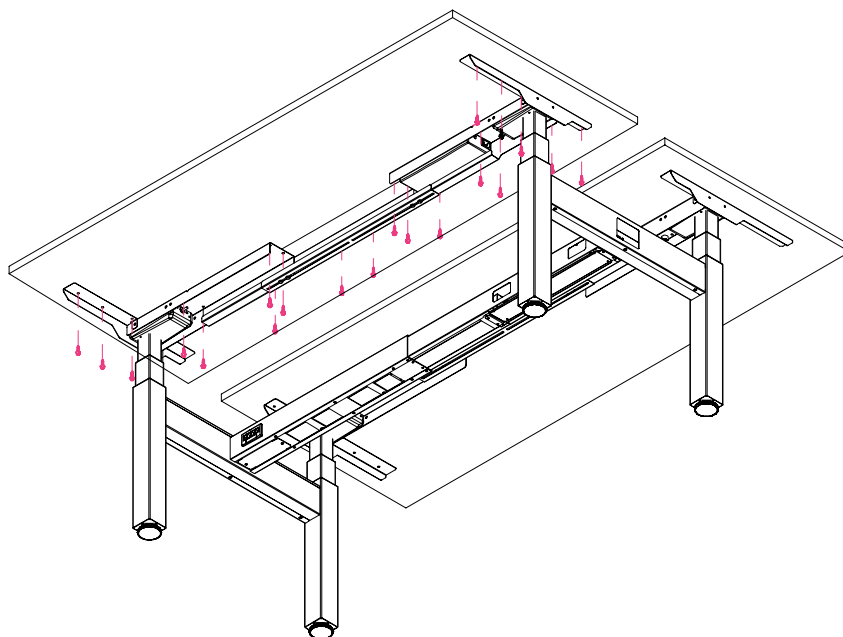


## 13 | Connect Leg Cables and Handset Cable to Control Box



Note: If adding a height-adjustable return surface, DO NOT connect cables to control box during this step. A return surface control box will be installed, replacing existing control box.



Scan to  
Watch Step

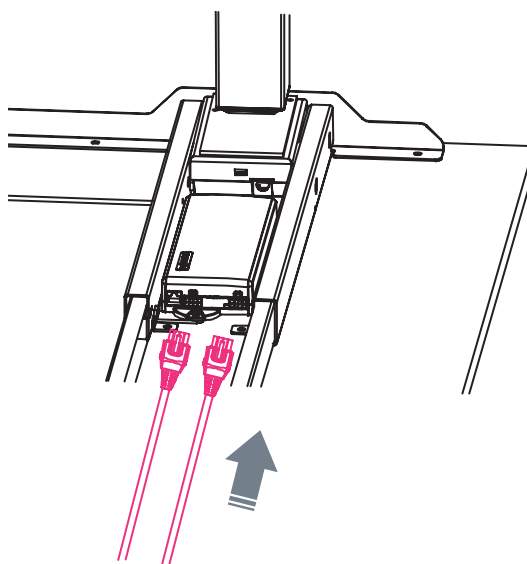


## 14 | Secure Handset

Align front of handset with surface edge and secure with wood screws.



Scan to  
Watch Step

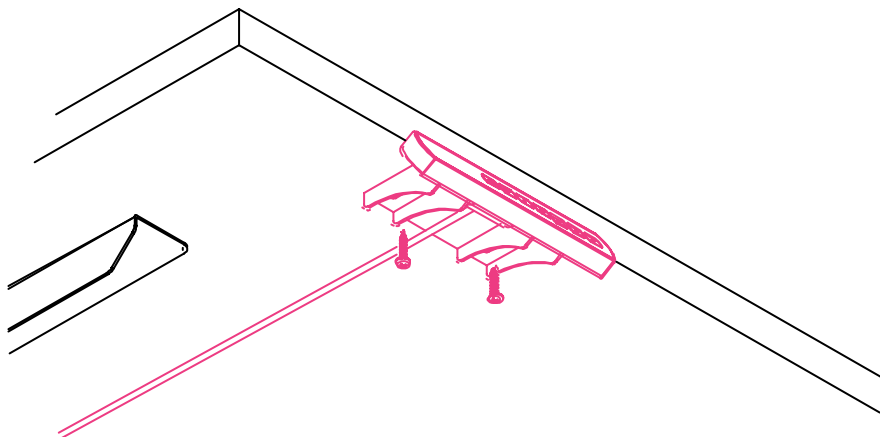

## 15 | Power Up and Initialize Handset


Connect power cord. Press and hold **^** and **v** simultaneously for 5 seconds until both leg columns are in lowest position (Desk will slightly rise, lower again, and then beep). Release buttons. The system is now operational.



Scan to  
Watch Step



**Note:** If adding a height-adjustable return surface, **DO NOT** power up and initialize handset during this time.

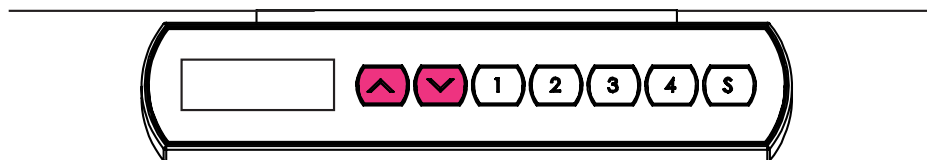


## 16 | Align and Connect Workstations

Slide data beam bridge inside data beam. Align second workstation and push workstations closer together. Connect jumper. Remove magnetic strips from power beam bridge and set bridge over jumper. Attach magnetic strips back to bridge. Push workstations together. Both ends of bridges should sit inside the power beam and data beam.



Scan to  
Watch Step


**Note:** For 72" workstations, use BPROBRG2 (12.25"). For 48"-66" workstations, use BPROBRG1 (7.5").

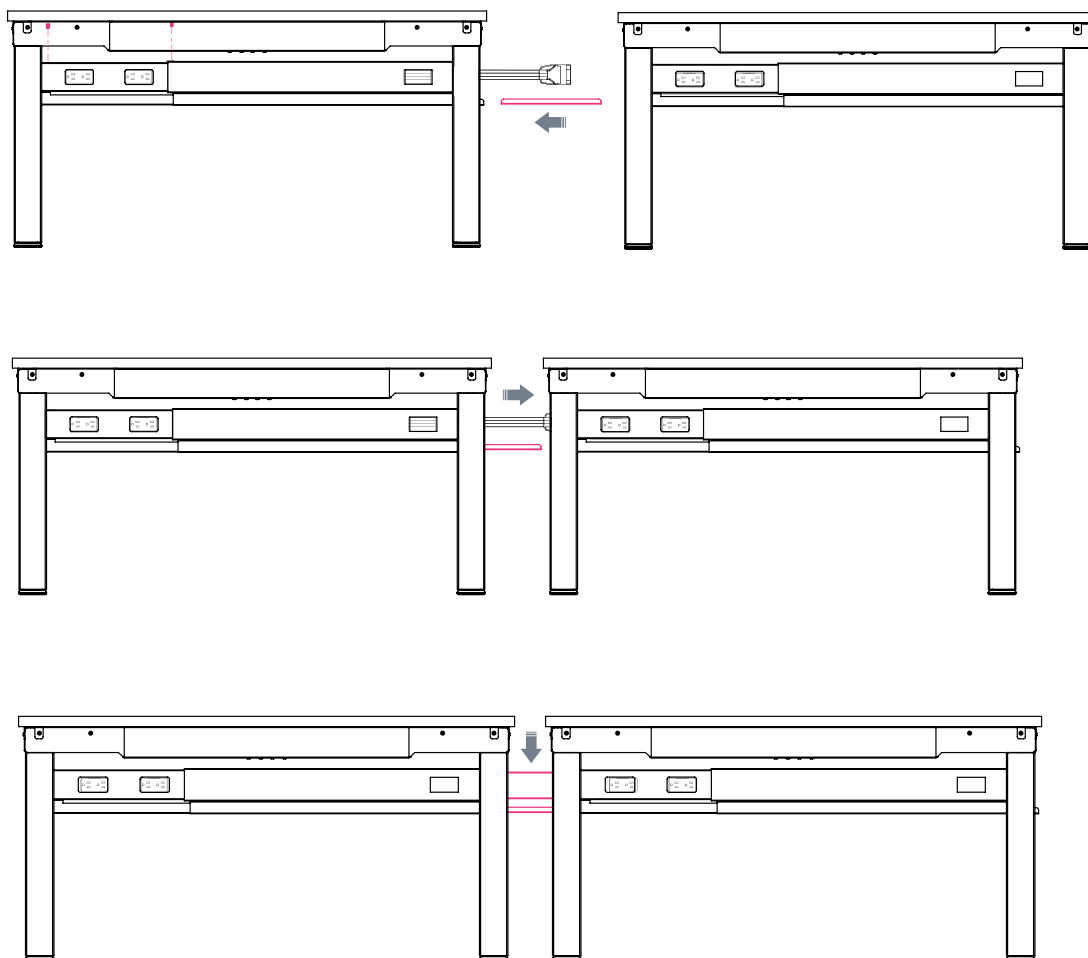

## 17 | Install Rubber Gaskets and Plastic Covers




Scan to  
Watch Step

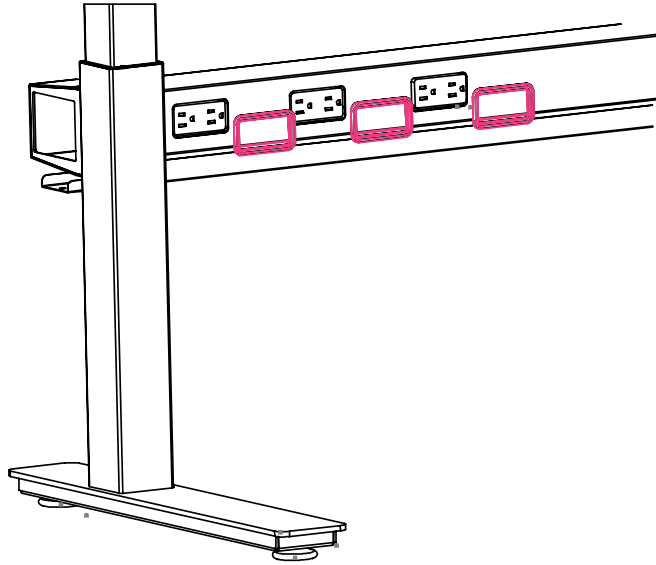


## Optional | Install Support Bar for 72" Surfaces



Scan to  
Watch Step

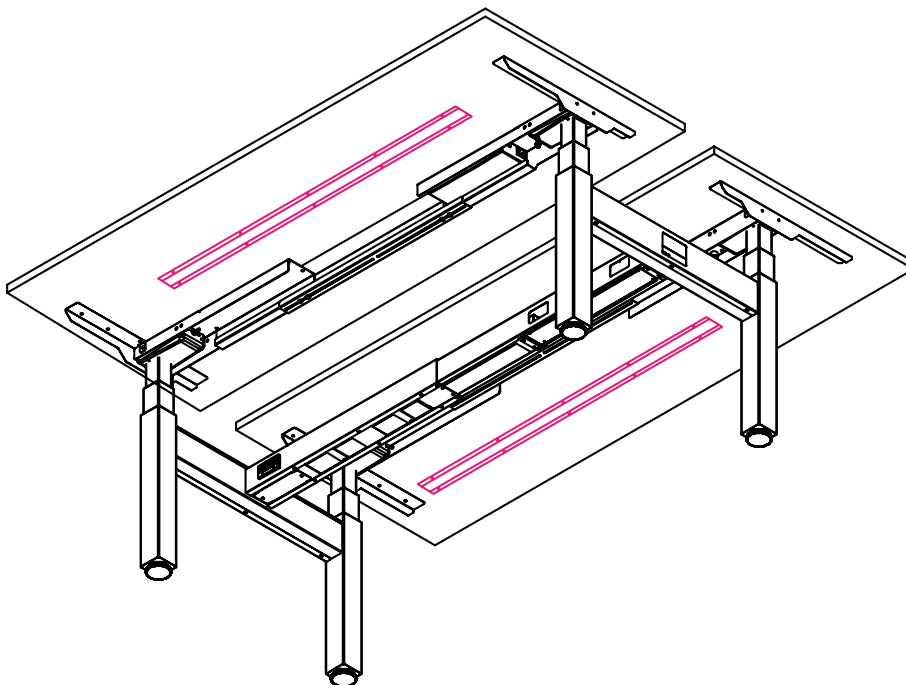

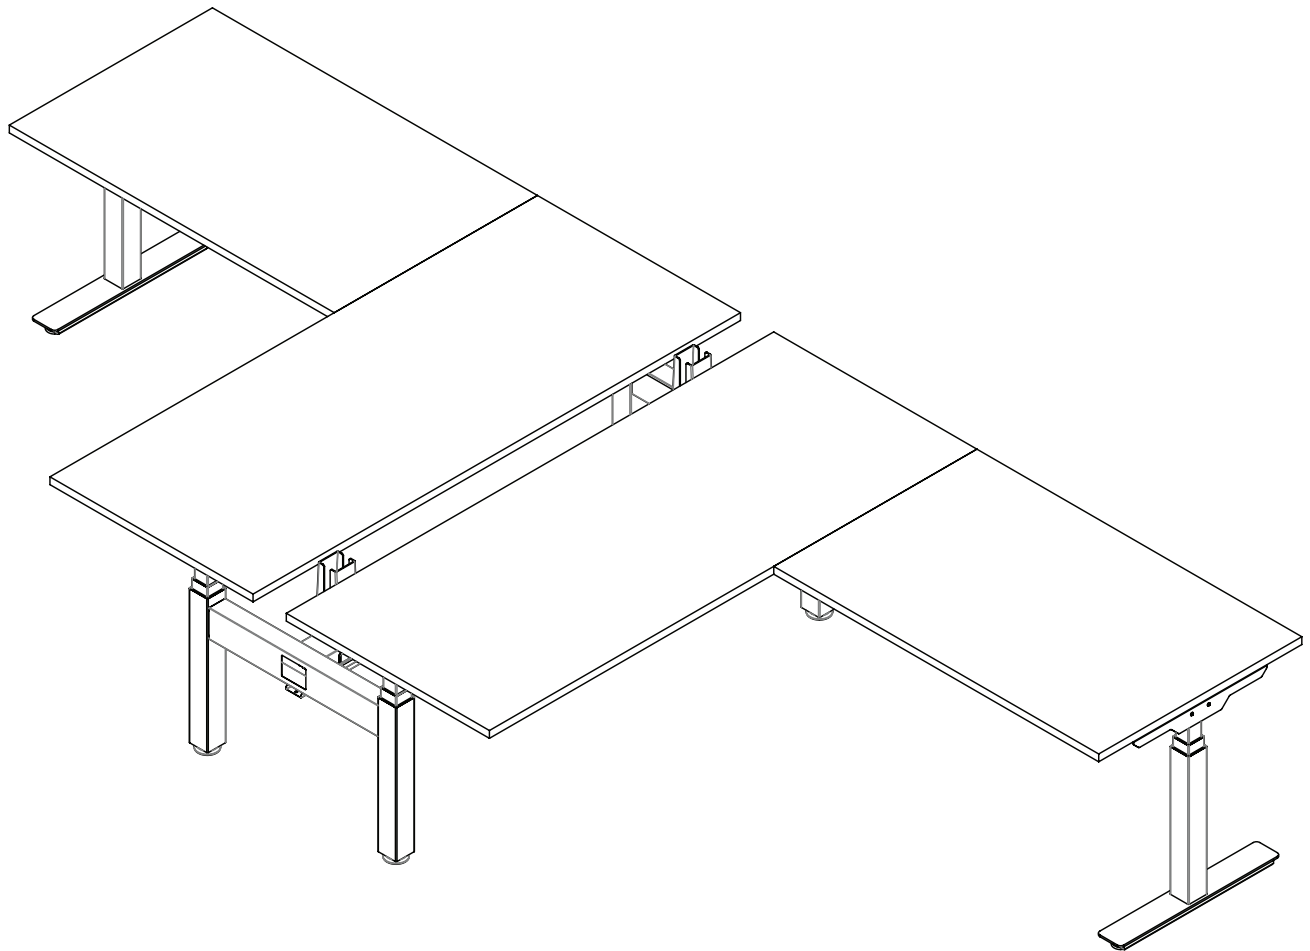


## Return Surface

### Overview










THINK Sit-to-Stand Workstation

 Quantities are for a single workstation. Parts may vary depending on project, but install steps will remain the same.



Scan to  
Watch Section

## Parts List


Code	Qty.	Description	
BPROLF	2	Adjustable Return Leg	
	2	T-Foot	
	2	Return Leg Support Bracket	
	2	Control Box (for L-Shape)	
	2	Extension Cable	
	2	Cable	
	2	Flat Bracket	
GBXXXX	2	Return Surface	
BFB1	4	Flat Bracket	

## 1 | Connect Return Leg to Support Bracket

Secure return leg support bracket to return leg from using 6 screws.



Scan to  
Watch Step

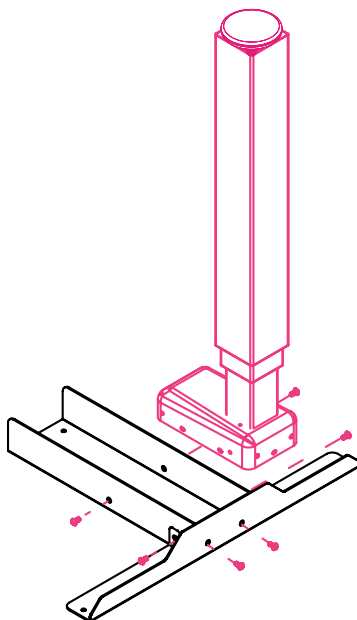


## 2 | Remove Glide and Inner Bracket

Twist off leg glide. Using an Allen wrench remove screws that are holding the inner bracket and remove bracket from leg.

**Note:** Glide and inner bracket must be removed so foot can be added to workstation.



Scan to  
Watch Step

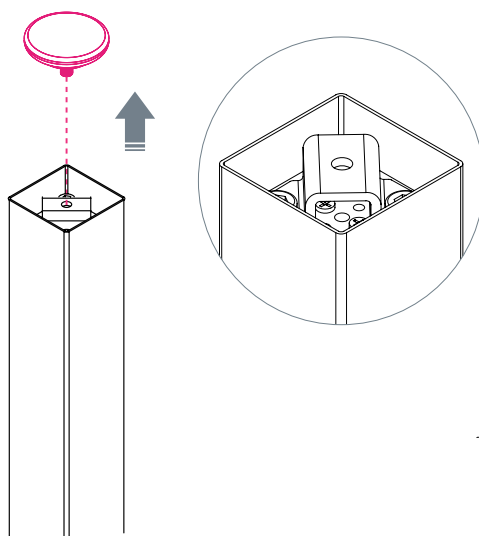


### 3 | Connect T-Foot to Return Leg

Secure T-foot to return leg using 4 bolts.



Scan to  
Watch Step

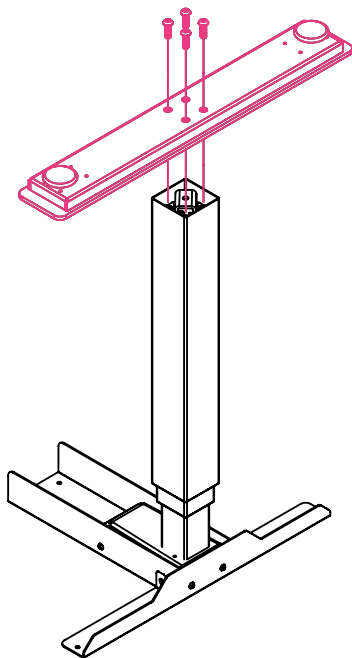


### 4 | Attach Return Leg to Return Surface

Requires 6 wood screws.

Note: The return leg will be centered along the depth of the return surface.



Scan to  
Watch Step

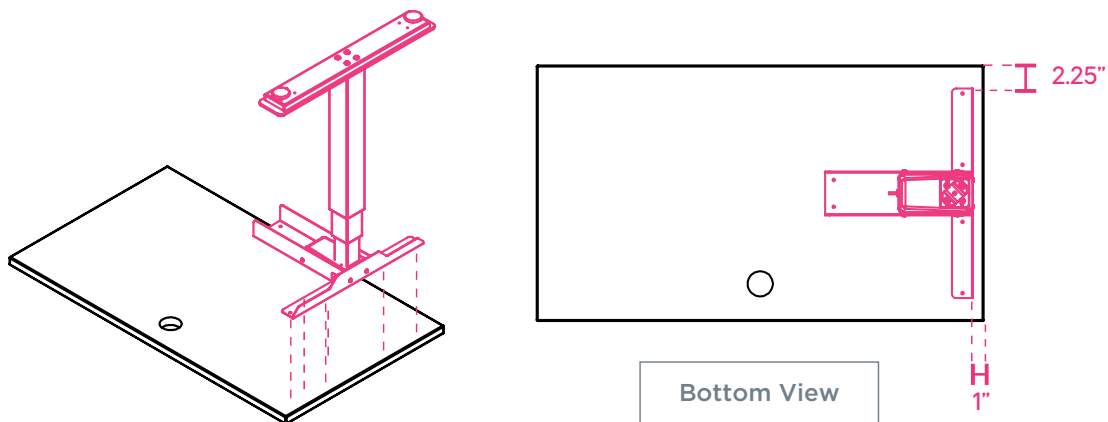


## 5 | Attach Flat Brackets to Main Surface

Attach 2 small flat brackets and 1 large flat bracket under the main surface edge using 6 wood screws. Center-align brackets on the edge of main surface so that only half of the brackets are being secured to main surface.

**Note:** Leave space between large bracket and inner small bracket to install support bar.



Scan to  
Watch Step

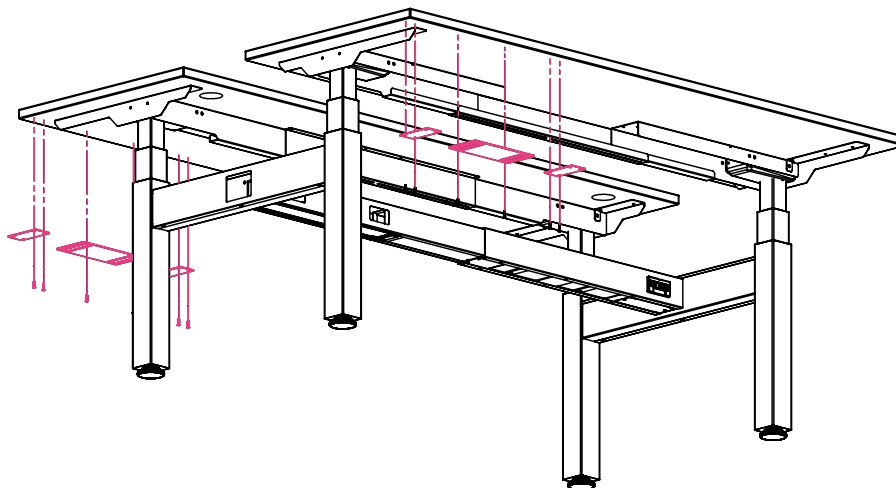


## 6 | Secure Return to Main Surface

Position return surface on flat brackets and align return edge to main surface edge. Secure using wood screws.



Scan to  
Watch Step

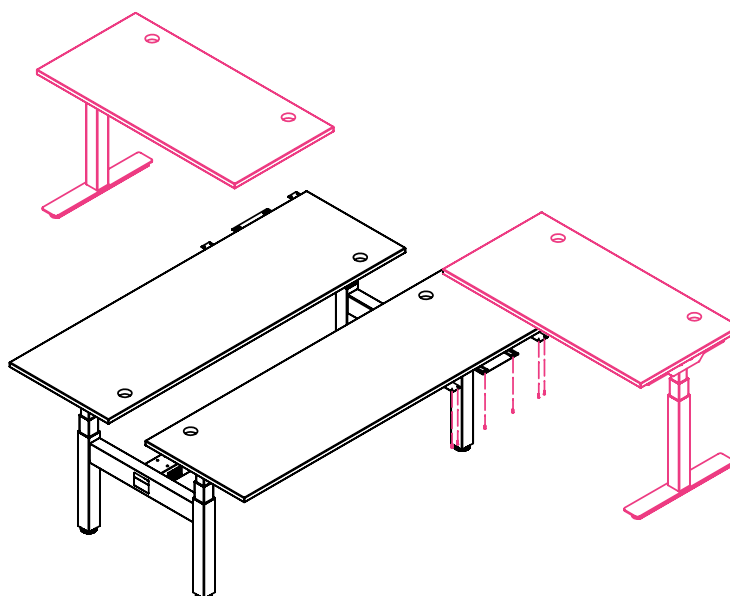


## 7 | Install Support Bars

Install support bar under main surface and return with wood screws.



Scan to  
Watch Step

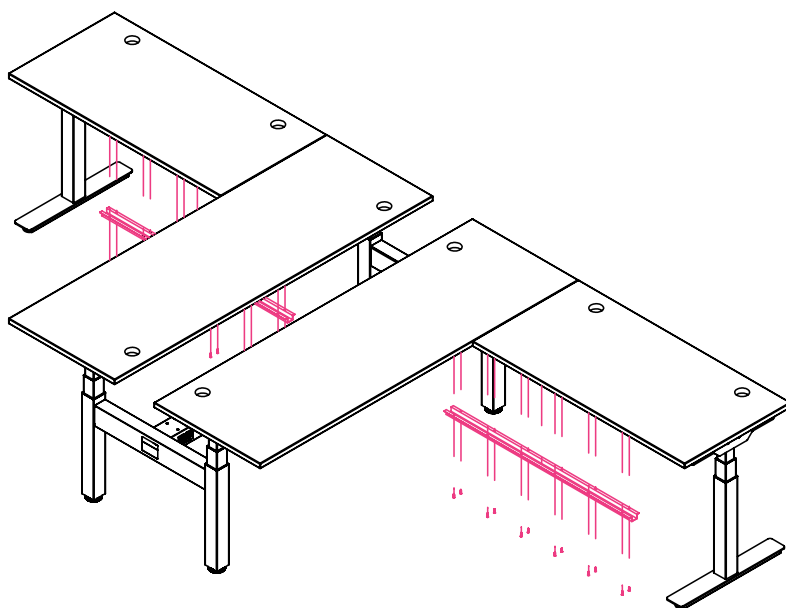


## 8 | Install Return Control Box

Remove existing control box from main surface and replace with return control box. Secure with existing screws. Connect all three leg cables, handset, and power cable.



Scan to  
Watch Step

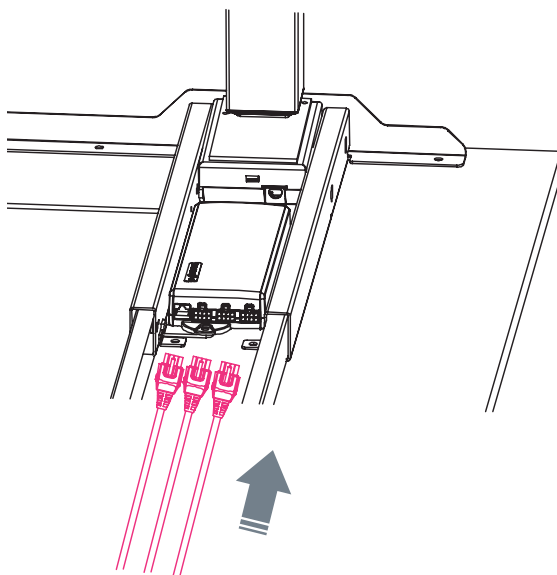


## 9 | Power Up and Initialize Handset


Connect power cord. Press and hold ^ and v simultaneously for 5 seconds until both leg columns are in lowest position (Desk will slightly rise, lower again, and then beep). Release buttons. The system is now operational.



Scan to  
Watch Step

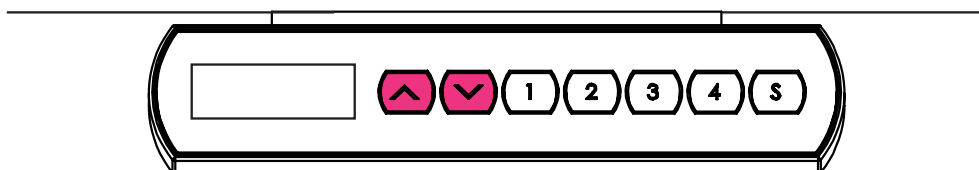



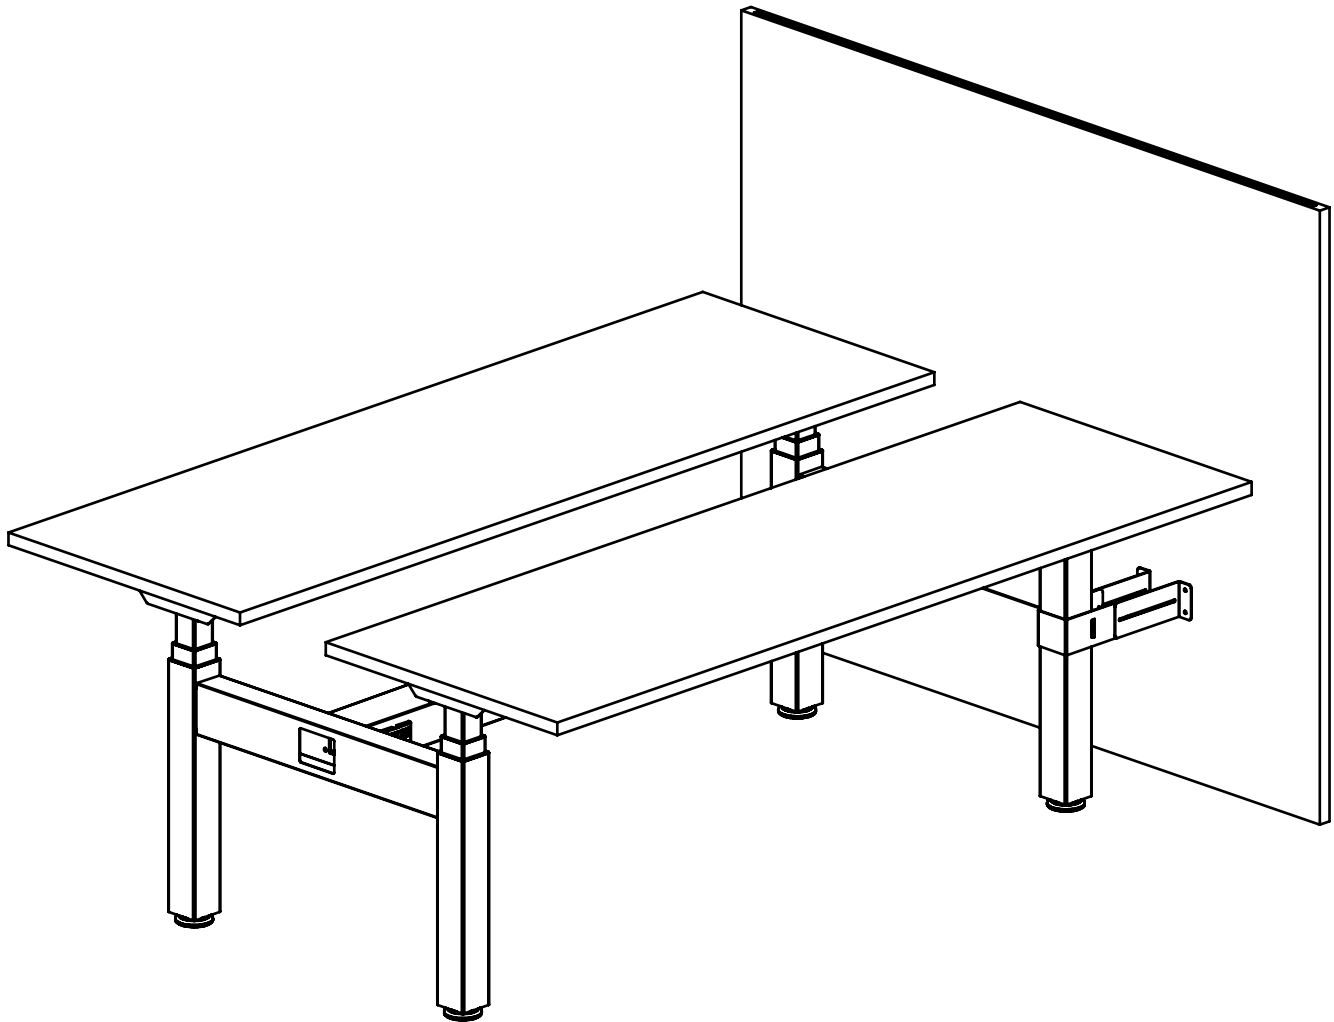


## Panel Brackets

### Overview

---


THINK Sit-to-Stand Workstation

 Quantities are for a single workstations. Parts may vary depending on project, but install steps will remain the same.



Scan to  
Watch Section

## Parts List


Code	Qty.	Description	
BPROAEPB	1	Adjustable Panel Bracket (Set of 2)	

## Optional | Adjust Bracket to Fit Width of Laminate Panel

If working with adjustable panel bracket, you have the flexibility to adjust bracket to accommodate the width of a custom panel by detaching bracket and rotating, if needed.



Scan to  
Watch Step

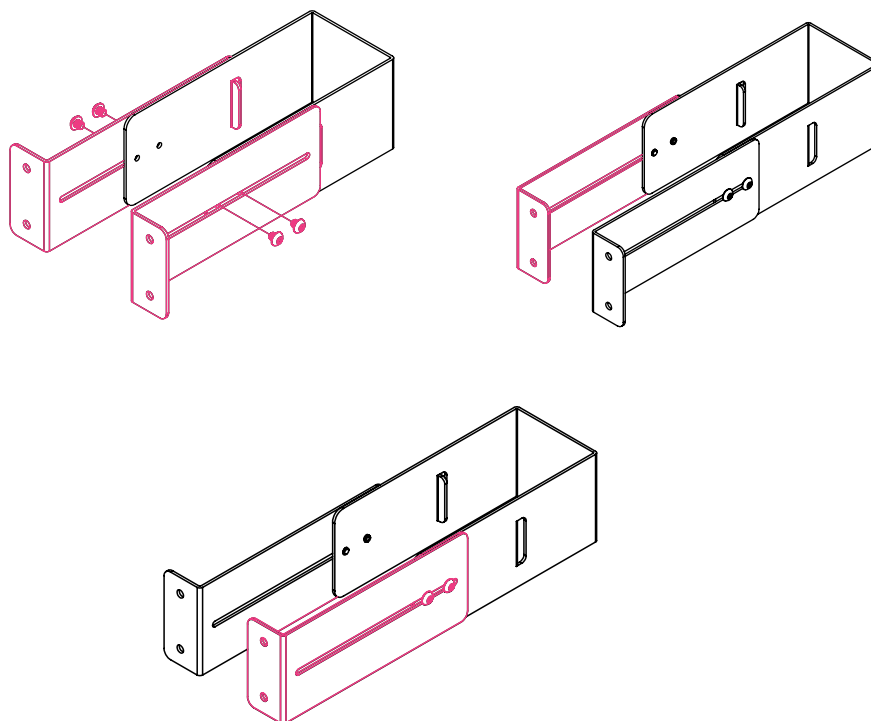



## 1 | Attach Panel Bracket to Workstation Leg

With a partner, lift workstation up and slide bracket under workstation leg. Sit workstation back down into the panel bracket. Slide bracket up workstation leg. If working with adjustable bracket, adjust depth accordingly by loosening screws. Once depth is determined, tighten screws.



Scan to  
Watch Step

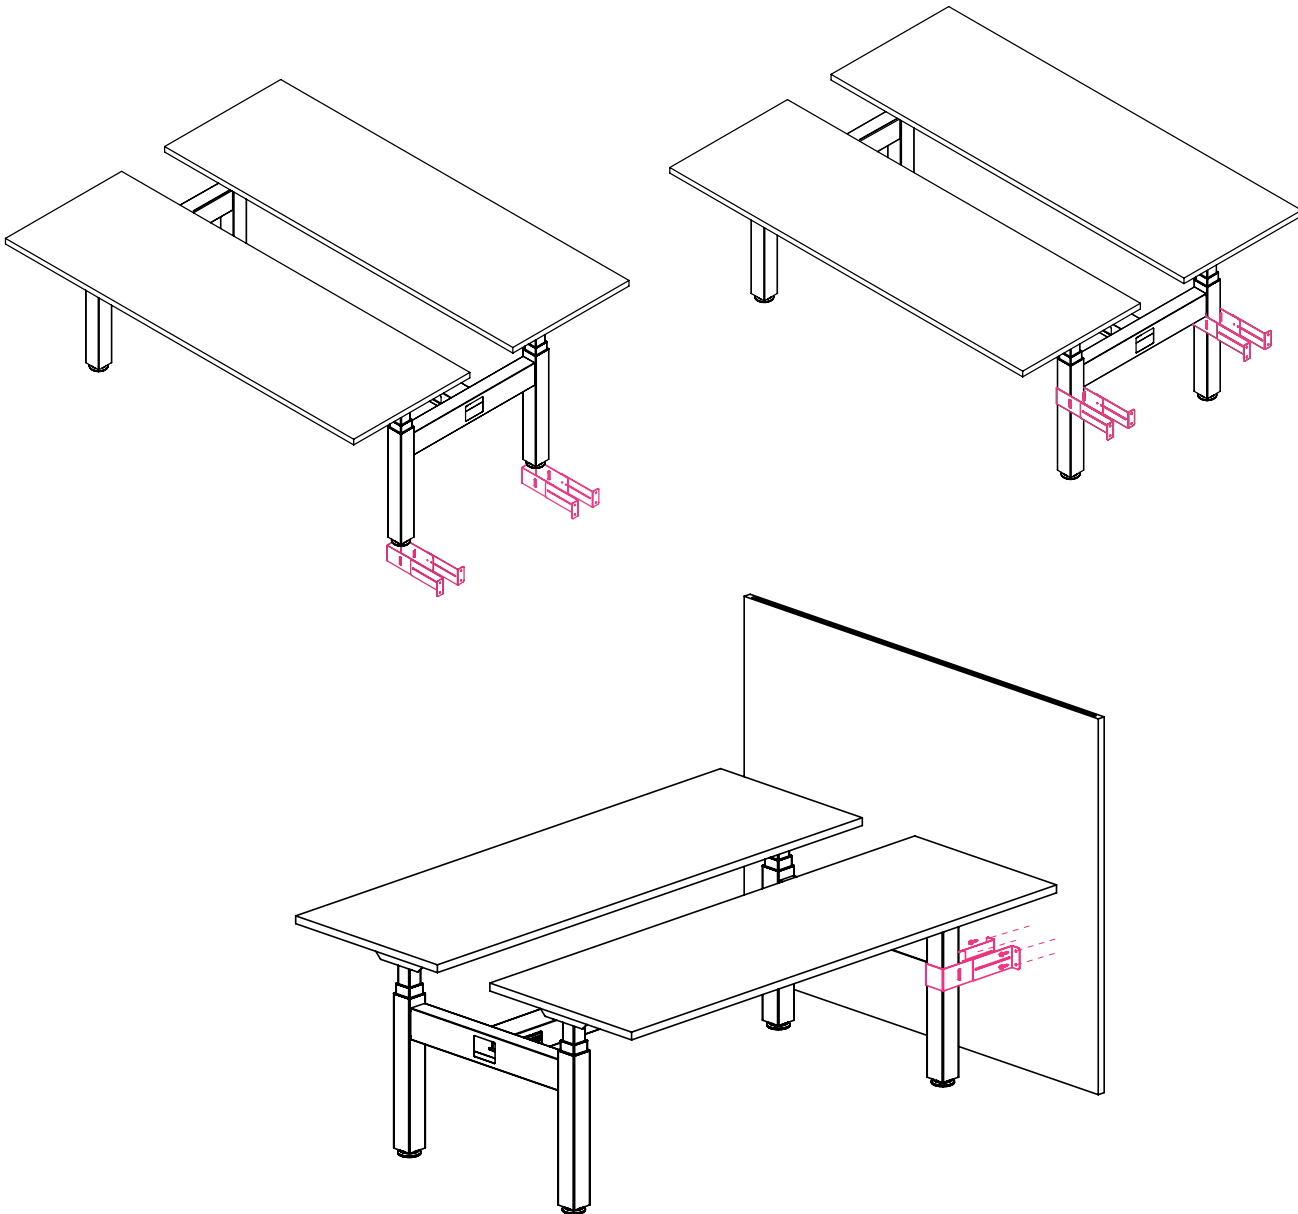

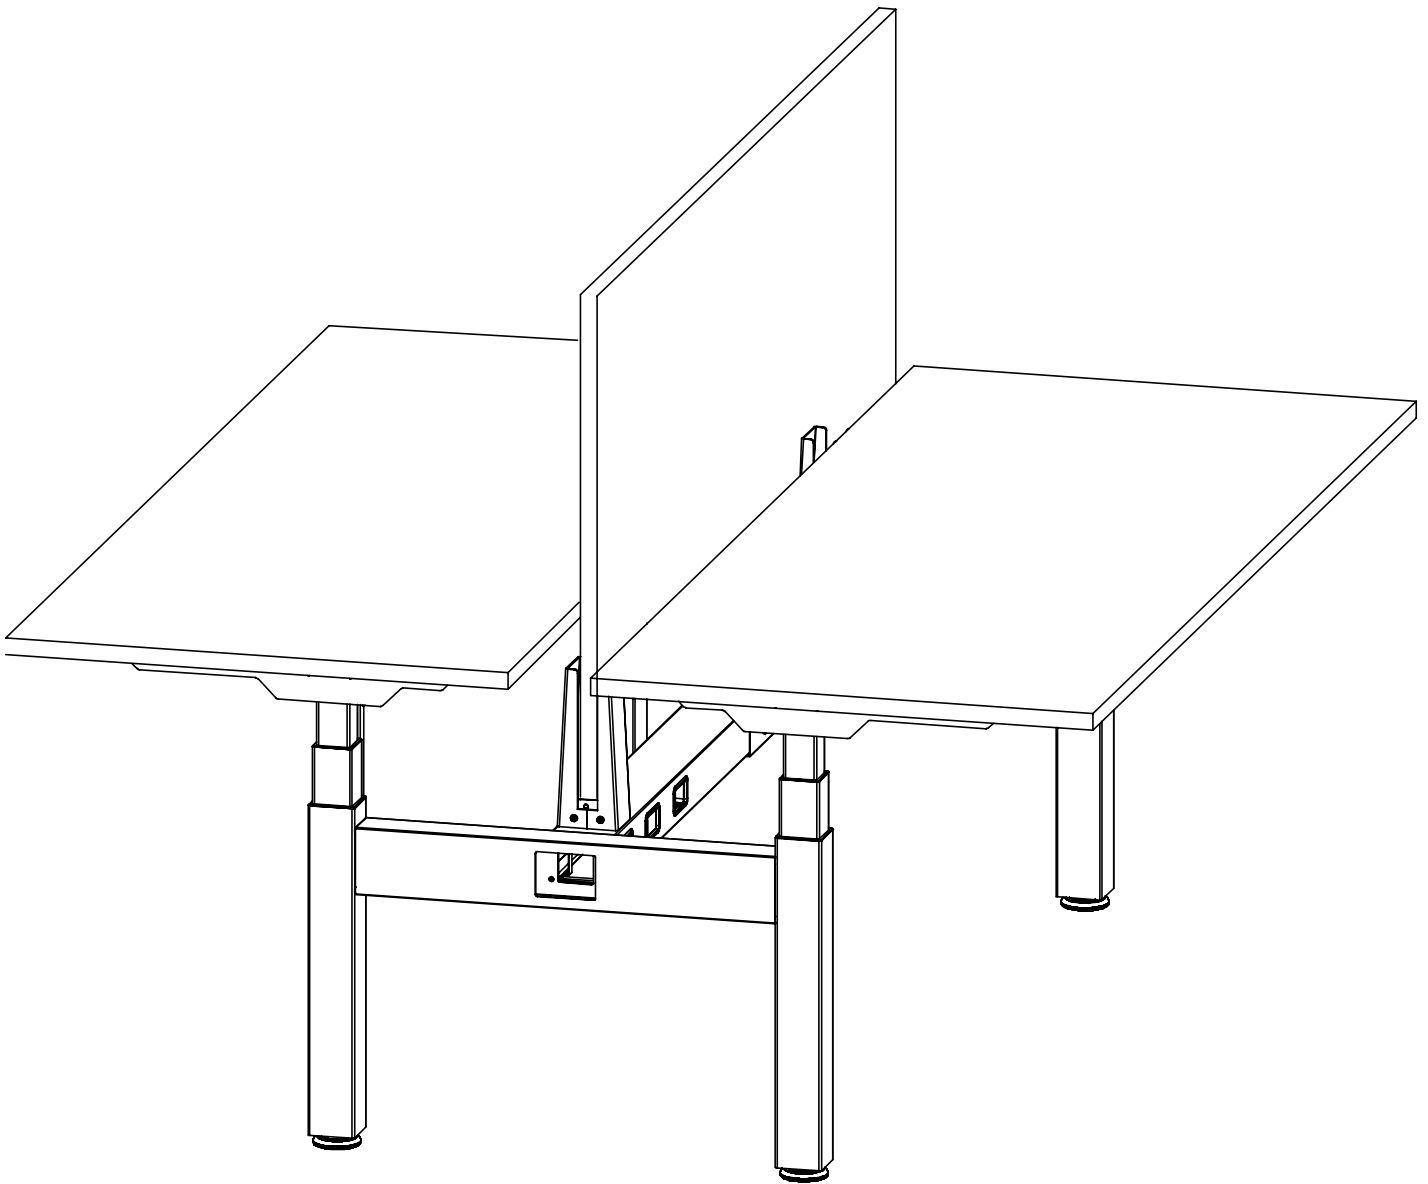


## Beam-Mounted Divider Clippers

### Overview





THINK Sit-to-Stand Workstation

 Quantities are for a single workstation.  
Parts may vary depending on project, but install  
steps will remain the same.



Scan to  
Watch Section

Parts List


Code	Qty.	Description	
BPROBRK	1	Beam-Mounted Divider Clipper (Set of 2)	
	16	Machine Screw	
	2	Divider Clipper Base	
BPROMBRG	2	Rubber Shim (For Glass Divider)	

## 1 | Attach Clipper Base to Frame

Secure clipper base to frame using 4 screws for each base.



Scan to  
Watch Step

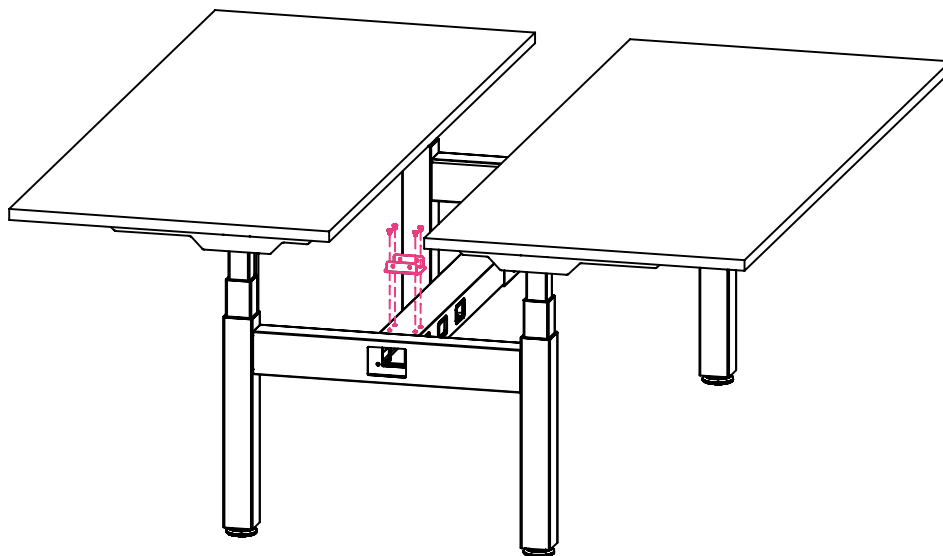


## Optional | Install Rubber Shim

If installing a glass divider, set rubber shim inside beam-mounted divider clippers by guiding shim down clipper with a screwdriver. Bring screwdriver back up to open up rubber shim.



Scan to  
Watch Step

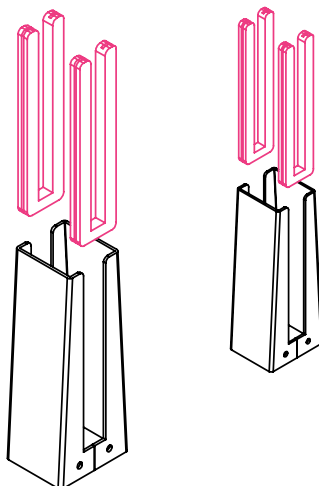


## 2 | Attach Clipper to Clipper Base

Sit clipper on clipper base and align holes. Secure using 4 screws.




Scan to  
Watch Step

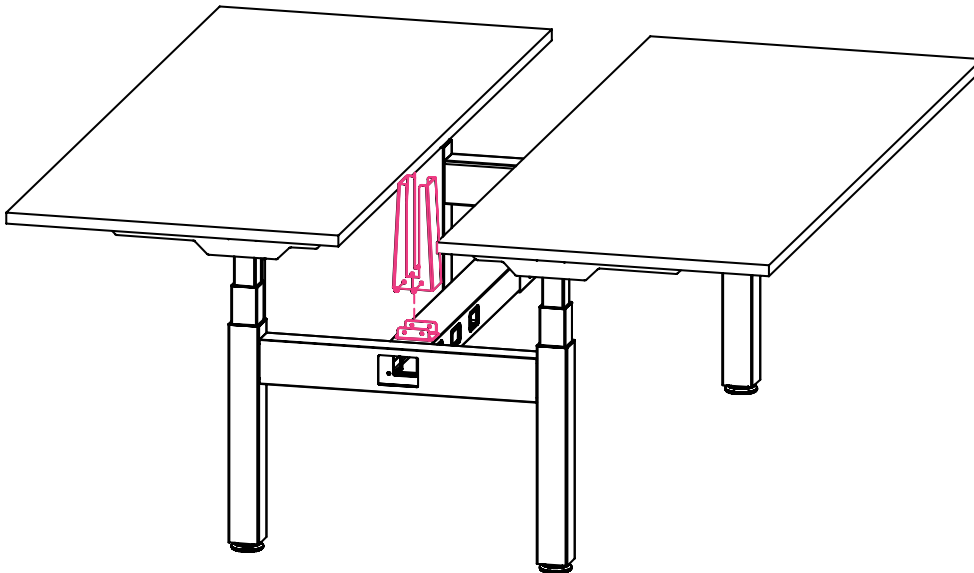


## 3 | Install Divider



Scan to  
Watch Step

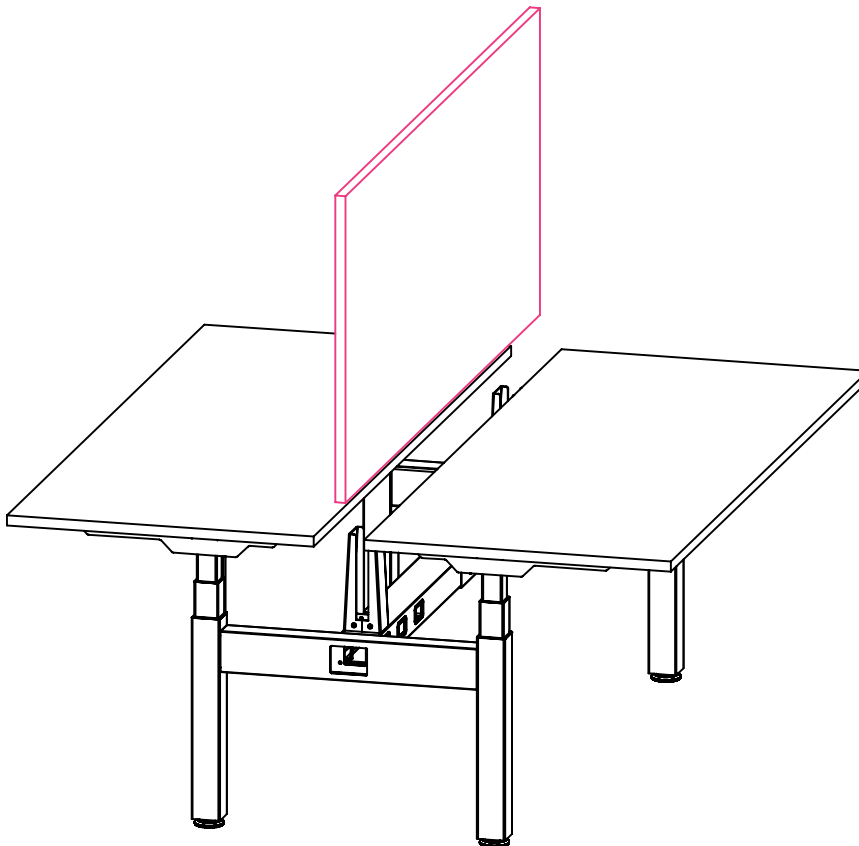

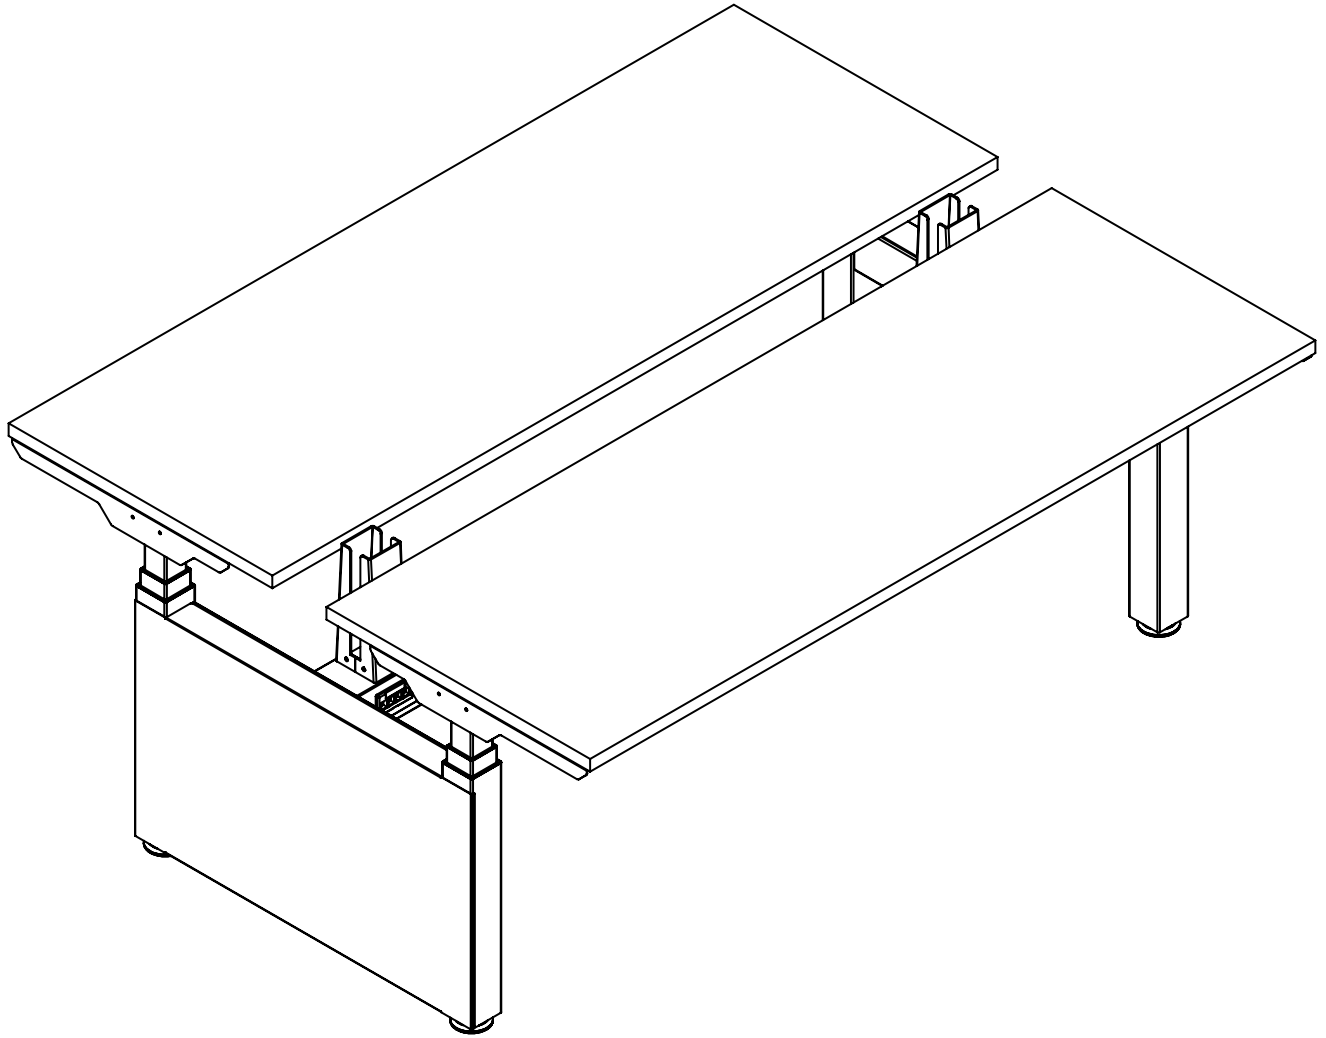


## Steel End Panel

### Overview

---



THINK Sit-to-Stand Workstation

 Quantities are for a single workstation.  
Parts may vary depending on project, but install  
steps will remain the same.



Scan to  
Watch Section


## Parts List

Code	Qty.	Description	
BPROEP	1	Steel End Panel	
	3	Machine Screw	

## 1 | Snap Steel End Panel on Cross Beam



Scan to  
Watch Step

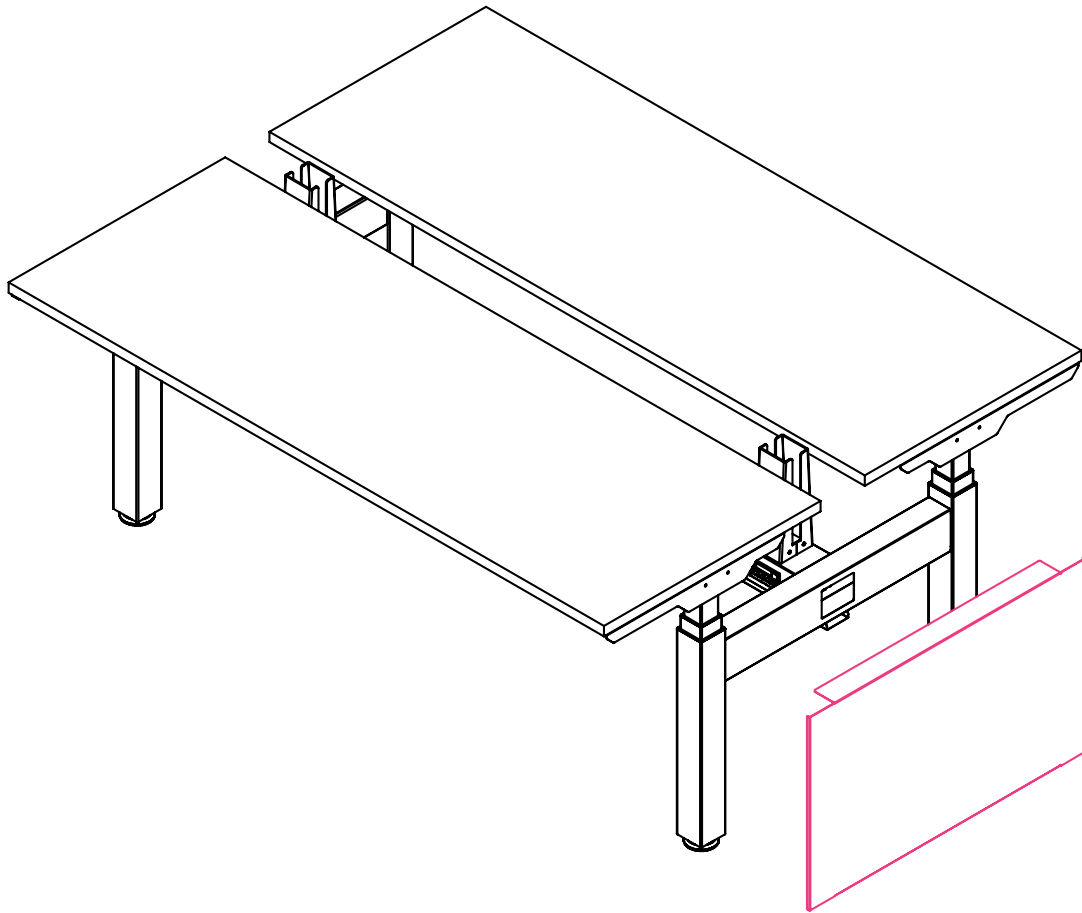

## 2 | Secure Steel End Panel

Secure using 3 screws.



Scan to  
Watch Step

