

LED Landscape Light

CHAPLET

25W/35W/40W/60W

Elegant and conical aesthetically pleasing design comprises die cast Aluminium spigot housing powder coated finish. A High performance optical grade diffuser is used for achieving desired light output. This luminaire is recommended to be used for lighting in Parks, Parking Lots, Gate Posts, Pathways etc.



GLAREFREE SOFT LIGHT

Light and thin, uniform in illumination

IP65

Protection against water jet & dust

HEAT MANAGEMENT

Efficient heat management & improved life

SAFETY

Trouble free extended life with BIS for electrical safety

PROTECTION

Protection against surge for improved & trouble free luminaire life



PRESSURE DIE
CAST HEAT SINK



IP65
INGRESS
PROTECTION



4KV
SURGE
PROTECTION



Potted driver



Decorative post top
with 360° indirect
Light distribution



THD<10%,
PF>0.95

Applications



Gardens



Public Areas



Pathways




Gated Communities




Municipalities

Dimension Drawing

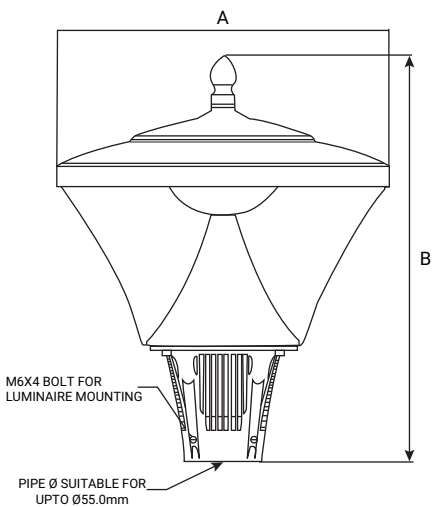

WATTAGE	(A)	(B)
25W	Ø250.0±5.0	325.0±5.0
35W	Ø329.0±5.0	405.0±5.0
40W	Ø329.0±5.0	405.0±5.0
60W	Ø433.0±5.0	484.0±5.0

Photometric Data

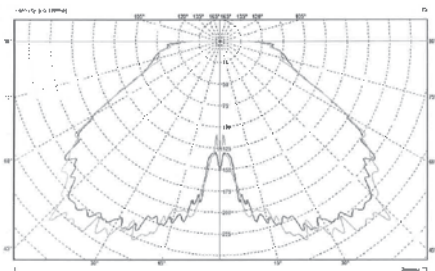

Technical Specification

Product Description	**Nominal Wattage	CCT (K)	CRI	VOLTAGE (V)	**MAINS CURRENT	*APPROX WT (A)
CBP-610-25-57-SL-CA-NBK	25W	5700 ANSI	≥70	240	0.109	1.31
CBP-610-35-57-SL-CA-NBK	35W	5700 ANSI	≥70	240	0.131	1.95
CBP-610-40-57-SL-CA-NBK	40W	5700 ANSI	≥70	240	0.175	1.95
CBP-610-60-57-SL-CA-NBK	60W	5700 ANSI	≥70	240	0.263	3.28

