JOB: _____

ITEM NO: _____

COOK-N-HOLD LOW TEMPERATURE SMOKER OVEN MODEL 750CHSK1EX

FEATURES AND BENEFITS:

- Fully insulated Cook-N-Hold smoker designed for flavorful results by slow cooking. Slow cooking means 15% to 20% less shrinkage. More product yield.
- Smokes with real wood chips. Cold smoke fish and cheese as well with Kold Keepers.
- Efficient 3000 Watt power unit allows for reheating of prepared meals or bulk items. Maximum temperature 350°F (176°C). Powerful 250 Watt cal rod heats chips quickly.
- Includes stainless steel vented chip box and variable one hour timer for mild to heavy smoke flavor.
- A user-friendly solid-state control with large, high-resolution touchscreen display to ensure holding at precise food temperature.
  - 6.8", high-resolution, glove-safe, high-impact, capacitive touchscreen interface.
  - Large, easy-to-read time/temperature displays.
  - Shelf timers.
  - HACCP data collection with date/time stamp
- 6" meat probe.
- Cook and hold up to 100 lbs. (45 kg.) of meat in less than 6 sq. ft. of floor space.
- Fully insulated, stainless steel interior and exterior for ease of cleaning. Smooth interior coved corners prevent food particle/grease buildup.
- Oven is operable on either 208 or 240 Volt circuits at the flip of a switch.
- Field reversible insulated door prevents temperature loss. Silicone door gasket for proper seal. High temperature ceramic magnetic latch for "easy open" and security during transport.
- Safety conscious anti-microbial latch protect against spreading germs. Standard with right hand hinges; left hand hinging available upon request.
- Removable stainless steel pan slides have eleven positions on 1-3/8" centers. Supplied with 3 stainless steel wire grids.
- External drip pan on front keeps traffic area dry, safer.
- Heavy duty 3" swivel modulus casters, two with brakes. Provides mobility when fully loaded.
- Ovens can be stacked for flexibility and increased capacity.
- Cres Cor recommends soaking wood chips for a minimum of 24 hours before usage.

C US

SANITATION NSF/ANSI 4



750CHSK1EX



• HACCP data collection with date/time stamp
• Shelf timers • Programmable recipes
• One-Touch button recipes

POWER UNIT OPTIONS:

3000 Watts, 208/240 Volts, 1 Phase, 60 Hz.
3000 Watts, 208/240 Volts, 3 Phase, 60 Hz.
2000 Watts, 120 Volts, 1 Phase, 60 Hz.


ACCESSORIES and OPTIONS (Available at extra cost):

- ❑ Optional 3" food probe
- ❑ Stacking Kit
- ❑ Kold Keeper
- ❑ Tempered Glass Door Window
- ❑ Key Lock Latch
- ❑ Extra Wire Grids
- ❑ Perimeter & Corner Bumpers
- ❑ Various Caster Options
- ❑ 120 Volt Service
- ❑ Mobile Equipment Stand 24"

5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

April 2026

750CHSK1EX

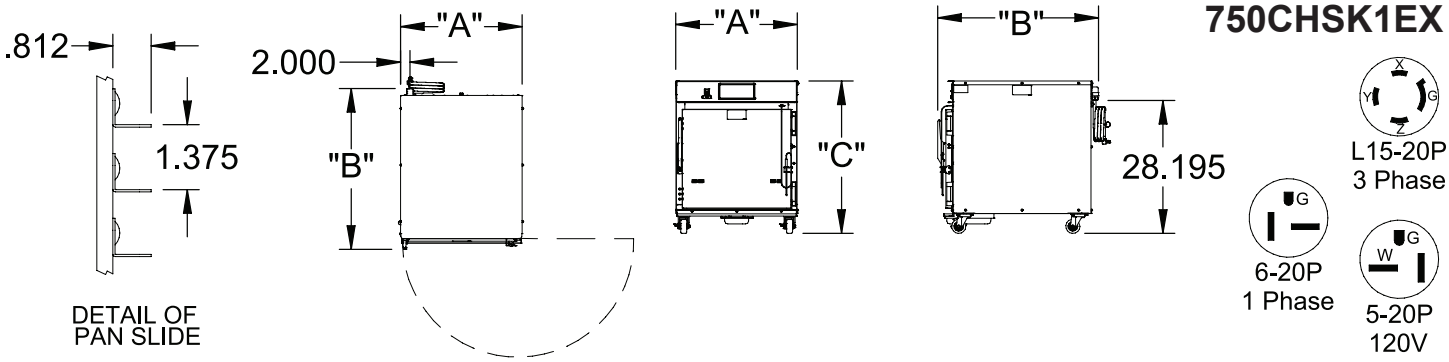

CRES COR MODEL NO.	PAN CAP	PAN SIZE		DIM "A" WIDTH	DIM "B" DEPTH	DIM "C" HEIGHT	INSIDE DIMENSIONS WIDTH	INSIDE DIMENSIONS DEPTH	INSIDE DIMENSIONS HEIGHT		WEIGHT ACT.
750CHSK1EX	9	12 X 20 X 2-1/2	IN	25-13/16	34-1/8	32-3/8	21-3/16	27	17-1/2	LBS	210
		305 X 510 X 65	MM	655	867	822	540	690	444	KG	96
	6	12 x 20 x 4	IN								
		305 x 510 x 105	MM								
	4	12 x 20 x 6	IN								
		305 x 510 x 155	MM								
*Additional shelves required.	5*	18 x 26 x 1	IN								
		460 x 660 x 255	MM								

When adding bumpers, Add 3-11/16" to Dim "A" and 3/8" to Dim "B"

CABINET:
- Outer Body: 22 ga. stainless steel.
- Inner body & top: 18 ga. stainless steel.
- Reinforcement: Internal framework of 16 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75˚F, 1-1/2" in walls, 1" in doors.
- Drip pan: 18 ga. stainless steel with drain; removable.
- Wood chip box (removable): 18 ga. stainless steel; 3-5/8" L x 8" W x 2-1/4" H with 8" long handle; mounts on lower rear wall.
- Casters: 3" dia., modulus tires, 1-1/4" wide, load cap. 200 lbs. each, temp. range -45˚/+180˚F. Front swivel casters equipped with brakes.

DOOR:
- Field reversible.
- Formed 20 ga. stainless steel.
- Latch: Anti-microbial chrome plated zinc with composite handle, ceramic magnetic type; mounted inboard.
- Hinges (2): Heavy duty chrome plated zinc; mounted inboard
- Gaskets: Perimeter type, silicone.
- Adjustable vents.

PAN SLIDES (removable):
- 18 ga. stainless steel angles, 5/8 x 1; riveted on 1-3/8" centers.
- Grids: Stainless steel, 21 x 26; supplied with (3) grids.

CLEARANCE REQUIREMENTS:
- 3" (76mm) at the back, 2" (51mm) at the top, 1" (25mm) at both sides.

Model 750CHSK1E SERIES

Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Cres Cor® Customer Service.

If you need a QR reader, visit your App Store on your device, or use the camera on your Smartphone.

ELECTRICAL COMPONENTS:
- Temperature Control with:
  - 6.8" high-resolution, glove-safe, high impact, capacitive touchscreen interface.
  - Programmable recipes
  - One-Touch button recipes
  - Shelf timers
  - HACCP data collection
  - Temperature range: 135°F (57°C) to 350°F (176°C).
- USB port with cover.
- Switch: ON-OFF rocker type
- Solid-state relay
- Power cord: Permanent, 6 ft., 12/3 ga., with right angle plug.
- Three (3) heater circuits.
- One (1) Smoker Heating Element
- Voltage selector switch: Change to 208 or 240 Volt; on back of oven.

INSTALLATION REQUIREMENTS:
- This model complies with section 59 of UL710B for emissions of grease laden air, and according to UL is not required to be placed under a ventilation hood. Check local requirements before installation.

POWER REQUIREMENTS:
- 3000 Watts, 208/240 Volts, 60 Hz., 1 phase, 20 Amp. Service 14.4 Amps at 208 Volts, 12.5 Amps at 240 Volts.
- 3000 Watts, 208/240 Volts, 60 Hz., 3 phase, 20 Amp. Service 8.3 Amps at 208 Volts, 7.2 Amps at 240 Volts.
- 2000 Watts, 120 Volts, 60 Hz., 1 phase, 20 Amp. Service 16.6 Amps.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Under Counter Smoker Oven Model 750CHSK1EX; Touchscreen; Solid state electronic controlled times and temperatures. Outer body of 22 ga. stainless steel; inner body of 18 ga. stainless steel. Fiberglass insulation 1-1/2" in walls; 1" in door. Stainless steel internal frame; coved corners. Anti-microbial chrome plated latch. Three (3) heated inner walls. Smoker box and timer. Removable pan supports for (9) 12" x 20" x 2-1/2" pans spaced on 2-3/4" centers. Casters: 3" modulus swivel casters. Load capacity 200 lbs. each. 2-Year Parts / 1-Year Labor warranty. Lifetime on heating elements (excluding labor). Provide the following accessories: _____ _____ _____. CSA Sanitation and safety certified US & CAN.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

CRES COR®
5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com
© Crescent Metal Products, Inc. 2026 All rights reserved.

Made in America Since 1936