



Backup that works overtime

Up to 3.5 hours

An inverter batten is a sleek, linear LED fixture that comes with a built-in rechargeable battery and inverter. It automatically switches to backup mode during power cuts, ensuring uninterrupted illumination. Energy-efficient and hassle-free, it's a modern alternative to traditional tube lights—perfect for homes, offices, and emergency lighting needs.

Trim Linea Inverter

BACKUP BATTEN



Power Sure:
3.5 Hours Back Up



Back Up Lumens:
450 lms.



22W



PC material housing
in off-white finish

Trim Linea Inverter

BACKUP BATTEN



SIZE:
1100MM



PROTECTION:
IP20



CCT:
CDL (COOL DAYLIGHT)



OPERATING VOLTAGE RANGE:
100V ~ 300V AC



THD:
< 20%



RATED VOLTAGE:
230 ~ 240V



100 LM/W
LUMINOUS EFFICACY



4KV
SURGE PROTECTION



>0.9
POWER FACTOR

- PVC-coated multistrand wire for safety and flexibility
- 2-core PVC-coated multistrand cable, 0.75 sq.mm (Red/Black, 12 CCA)
- Supplied with a cradle for secure and easy installation

Application Areas



Homes




School &
Colleges



Small Shops/
Establishments



Libraries




Hotels



Staircases &
Emergency exits



Hospitals
& Clinics

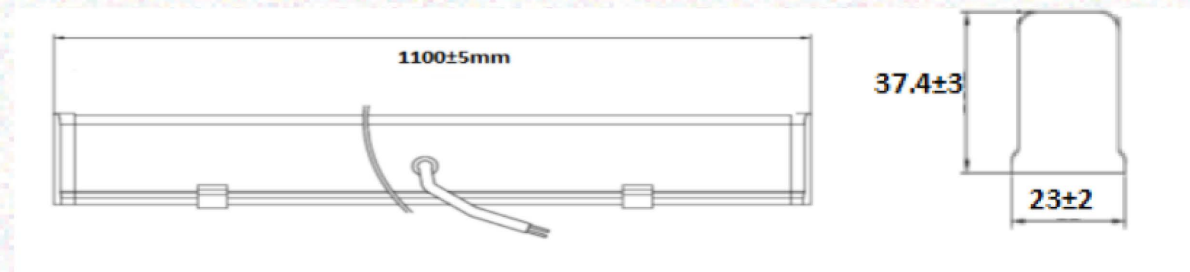

	Wattage (W)	CCT	CRI	Mains Current (A)	Approx. Wt. (Kg)
TCS-110-22-65-SL-DP-NWH	22	6500K	≥80	0.110	0.235

85+
YEARS OF
ILLUMINATING
INDIA



Crompton Greaves Consumer Electricals Limited
05GBD, Godrej Business District, Pirojshanagar, Vikhroli (West), Mumbai,
Maharashtra - 400079, India
www.crompton.co.in