WESTERN REFRIGERATION & BEVERAGE EQUIPMENT LTD.
1232 - 36 Ave. NE, Calgary, Alberta, Canada I P: 403.250.9656 I F: 403.291.9213 I info@wr.ca I www.wr.ca

SPEC SHEET

SNOOKER ICE MACHINES

SK-1029

Modular Ice Cube Machine

Brand
Snooker
Output
1,000 lbs / 24 hrs · bin B-705




SK-1029
shown on B-445 bin



Half cube
22 x 13 x 22 mm

Air-cooled modular ice machine head for bars, restaurants and kitchens. Produces up to 1,000 lbs of half cube ice a day and sits on a B-705 (700 lb) bin. Digital controls, a fault alert system and a water filter come standard. Bin sold separately.

Dimensions

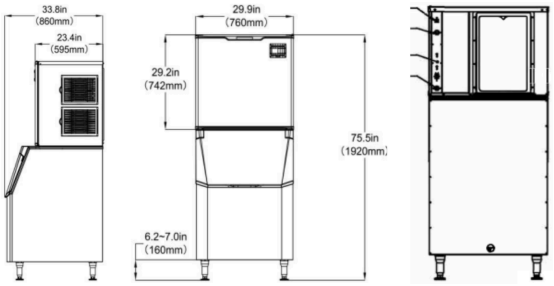

Side Front Rear

Shown on B-445 bin: 75.5" overall height and 33.8" depth with bin.

Standard features

- 1,000 lbs of ice per 24 hrs
- Half cube ice
- Recommended bin: B-705
- Digital control panel
- Ice thickness adjustment
- Automatic fault alert system
- Air-cooled R290 refrigeration
- Stainless steel exterior
- Water filter included

Performance	
Ice production	**1,000 lbs / 24 hrs (rated)**
50°F air / 50°F water	**922 lbs / 24 hrs**
70°F air / 50°F water	**927 lbs / 24 hrs**
90°F air / 70°F water	**815 lbs / 24 hrs**
Ice cube	**Half cube, 22 x 13 x 22 mm**
Condenser	**Air cooled**
Refrigerant	**R290**
Energy use	**40.9 kWh / 24 hrs**

Unit & installation	
Head only (W x D x H)	**29.92" x 24.33" x 29.25"**
Net weight	**187 lbs**
Shipping (W x D x H)	**33.27" x 29.53" x 31.69", 198 lbs**
Electrical	**220V / 60Hz / 1 ph**
Ambient air	**5 to 40°C (41 to 104°F)**
Water temperature	**5 to 35°C (41 to 95°F)**
Water pressure	**19 to 80 psi (0.13 to 0.55 MPa)**
Recommended bin	**B-705, sold separately**
Certification	**ETL, ETL Sanitation, ENERGY STAR**

Warranty

3 year parts, labour & compressor, with purchase of a water filter

Installation

Install on a level bin with a potable water supply and a gravity drain. Allow 11.8" clearance at the front, 5.9" at the sides and 7.9" at the rear for airflow.

Maintenance and cleaning are not covered under warranty. Replace the water filter cartridge about every 6 months (varies with water quality). Requires a dedicated 220V circuit. Specifications are subject to change without notice. Rev. October 2026.

Available on **AutoQuotes**