


Salon Fit Waterfall Head Spa & Handspray Set

Product Code: 38316

Transform any backwash into a spa-like experience. The half-moon waterfall design with multiple jets enhances relaxation, while the flexible, easy-to-use system switches seamlessly between waterfall and handspray for a truly indulgent, upsell-friendly treatment. For professional use only.

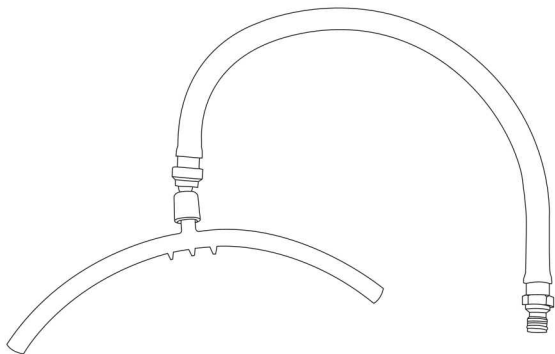

Includes


- 1 x Flexible Black Hose (water supply hose)
- 1 x Black Waterfall Head (waterfall outlet attachment)
- 1 x Chrome Handspray and Hose (Handspray outlet attachment)
- 1 x Non-drip Basin Bracket and Holster
- 1 x Chrome Connector

Parts Overview

- A: Flexible Black Hose
- B: Black Waterfall Head
- C: Chrome Handspray & Hose
- D: Non-Drip Basin Bracket & Holster
- E: Chrome Connector

Tools You Will Need:

- Adjustable Spanner
- PTFE thread tape
- Screwdriver (depending on your mounting setup)

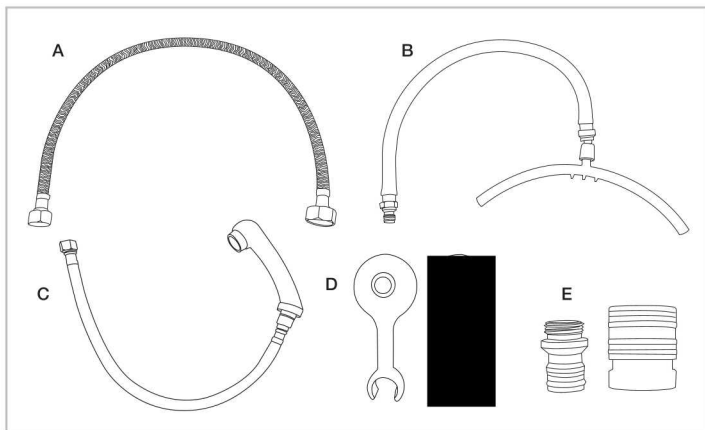

Getting Started

1. Mount the Brackets

- Take the Non-drip basin bracket and holster
- Secure it in place where the waterfall head will be installed on the backwash basin.
- Fit the Chrome connector to the top of the Non-drip bracket. Recommended to use with PTFE tape and an adjustable spanner to secure
- Make sure they are aligned properly so the waterfall head will sit straight.
- Fit the handspray and hose or the waterfall head by pushing down the chrome connector & clicking into place.
- To remove, push down the outside of the Chrome connector and lift out accessory.

2. Connect the Water Supply Hoses

- Attach the Black supply hose to the underside of the bracket and to the outlet on the basin mixer tap.
- If not a Lotus tap, it may require a brass adaptor from a plumber's merchant.
- Recommended to wrap the threads with PTFE tape before tightening to prevent leaks.

3. Test the Flow

- Once everything is connected, gently turn on the water supply.
- Check for leaks at all joints and tighten if necessary.
- Run the water to make sure the waterfall flow is smooth and properly aligned.
- The Waterfall flexi hose may need to be shaped to lean to the front of the basin to ensure it does not swivel in use.

Tips

- Always check washers are in place inside hose connections before tightening.
 - Test with lukewarm water before first use to ensure temperature balance
 - Should only be fitted by competent person
-

Warranty

This product has a 12 month warranty from date of purchase.

Visit salonsdirect.com/terms-and-conditions for full warranty information.

