

FURRION

1000W DECK MOUNT INVERTER

FIVBDP10A



COMPATIBLE WITH
APPLIANCES UNDER 1000W



HIGH SURGE POWER

1000W

CONTINUOUS OUTPUT



HIGH QUALITY
PURE SINE WAVE



LED INDICATOR WITH
ALL OPERATIONS STATUS




EASY
INSTALLATION

- Low standby current
- Built in advance microprocessor for friendly user interface

- Hardwire AC connection
- Built in transfer switch with a transfer time of less than 20 milliseconds



FIVBDP10A | 1000W DECK MOUNT INVERTER

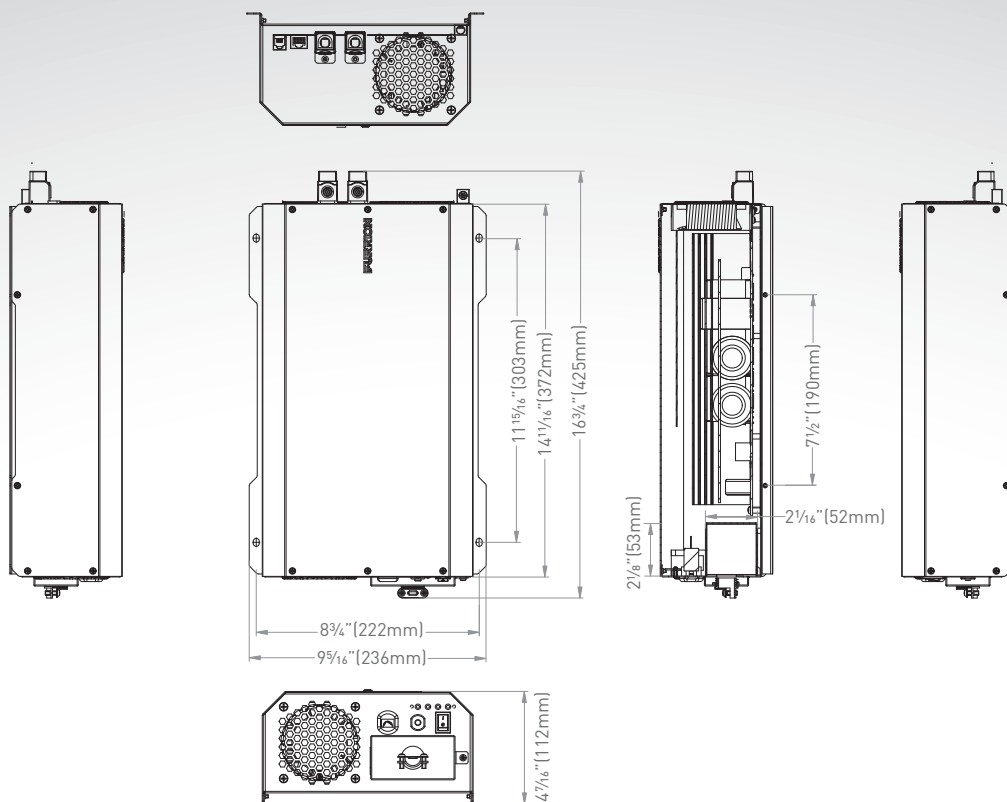

Specifications

Battery Voltage	10~15Vdc
AC Bypass Input	100~120Vac
Output Voltage	115 ±5 Vac
Output Frequency	60±1Hz
Output Waveform	Pure Sine Wave
Continuous Rated Power	1000w
Surge Output Power (2 Seconds)	2500w
Maximum Peak Efficiency	88%
Circuit Breaker	15A
Bypass Transfer Time	<20ms
Transfer Relay Rating	16A
Low Battery Protection	√
Over Voltage Protection	√
Over Load Protection	√
Over Temperature Protection	√
Battery Reverse Protection	√ (By Fuse)
AC Output Short Circuit Protection	√
Safety Standard	ETL Listed To UL 458/ CSA C22.2 NO.107.1
EMC Standards	Meet FCC Part 15 Class B
Operation Temperature	0°C to 40°C/32°F to 104°F
Operation Humidity	<90% RH Non-condensing
Storage Temp., Humidity	-30°C to 70°C/-22°F to 158°F, 10 to 95% RH

Packaging Information

Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	18 7/16" x 11 1/8" x 7 5/16" (469 x 282 x 185mm)
Individual Packaging Gross Weight (kg/lbs)	5.1/11.3
Individual Packaging Net Weight (kg/lbs)	5.8/12.8

Master Carton

Packaging Type	Master Carton Box
Quantity Per Box (pcs)	2
Master Carton Dimensions (W x H x D)	19 3/16" x 11 13/16" x 15 3/8" (486 x 299 x 390mm)
Master Carton Gross Weight (kg/lbs)	12.3/27.1
Master Carton Net Weight (kg/lbs)	10.2/22.5

Container Load Information

45'HQ Container Load (pcs)	1760
-----------------------------	------

* Note: "√"=Equipped