




FF34SW15A-BL



FF34SW15A-SS



WORKS WITH  
UNIMOTE



VIBRATIONSMART™



CLIMATESMART™



OVERHEATING  
SAFETY CUT-OFF



SLIDE-OUT  
SAFETY CUT-OFF



TEMPERATURE  
CONTROL SETTINGS



HEAT UP  
TO 500sq.ft



SIMULATED WOOD  
WITH 4-LEVEL LED  
FLAME TECHNOLOGY




TIMER

- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control
- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included



# FF34SW15A | 34" BUILT-IN ELECTRIC FIREPLACE

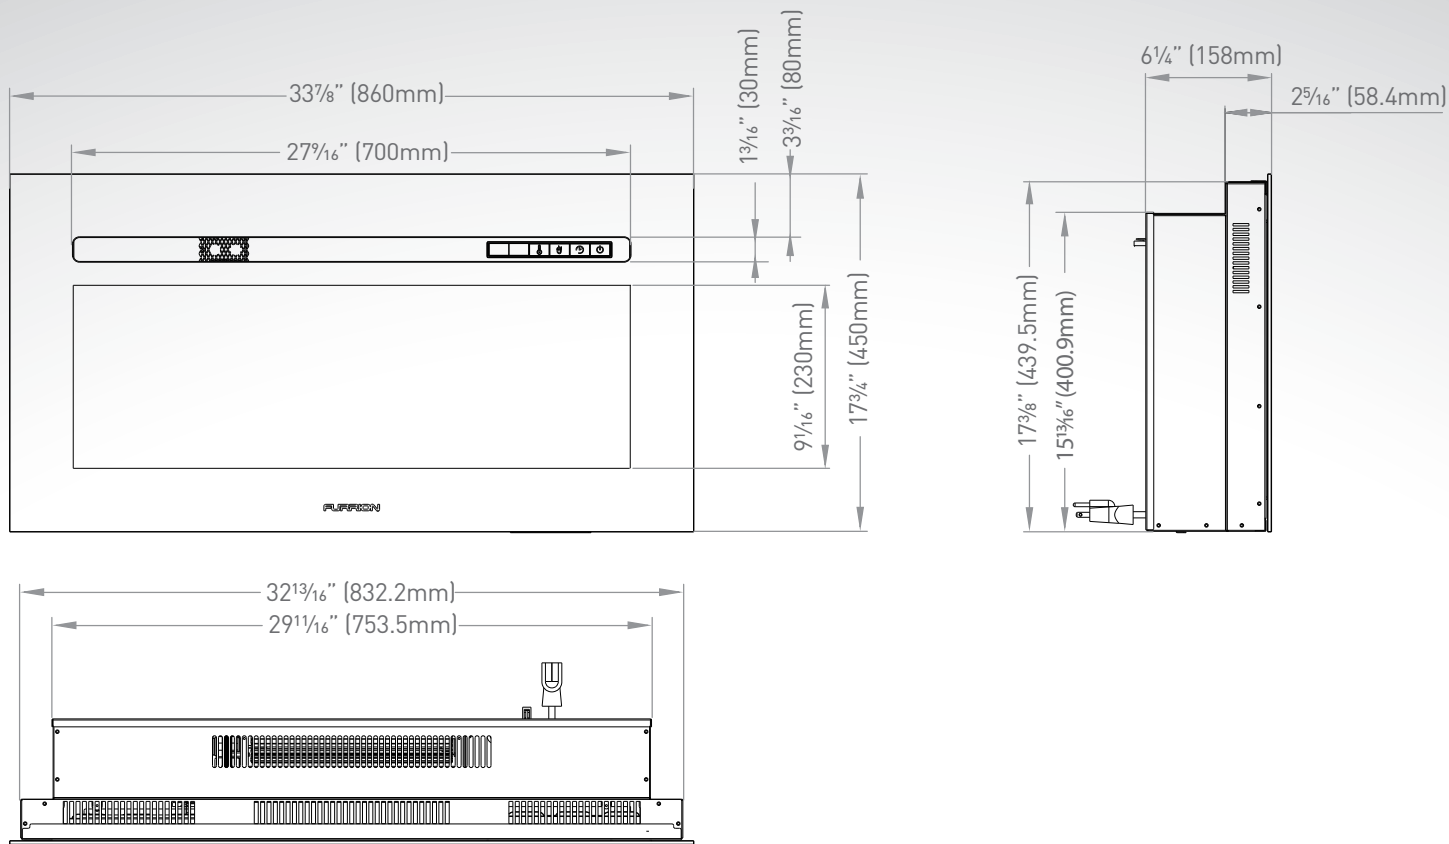

## Specifications

Rated Voltage	AC 120V/60Hz
Heating Output	750W/1465W
LED Control Board	✓
Timer	✓
Log Fuel Effect	✓
Remote Type	IR

## Dimensions

Product Size (W x H x D)	33 <sup>7</sup> / <sub>8</sub> " x 17 <sup>3</sup> / <sub>4</sub> " x 6 <sup>1</sup> / <sub>4</sub> " (860 x 450 x 158mm)
--------------------------	--

## Packaging Information

Packaging Type	Brown Carton Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (W x H x D)	35 <sup>1</sup> / <sub>16</sub> " x 19 <sup>1</sup> / <sub>2</sub> " x 8" (905 x 495 x 202mm)
Individual Packaging Gross Weight (kg/lbs)	20/44.1
Individual Packaging Net Weight (kg/lbs)	17/37.5

## Box Container Qty

20' - Box Container Qty	300
40' - Box Container Qty	600
40'H - Box Container Qty	680