

FURRION

5" 2-WAY OUTDOOR MARINE SPEAKER WITH LED

FMS5XX



FMS5L2-BL



FMS5L2-PS



UV RESISTANT



IP55


WATERPROOF

PP reinforced cone extends frequency response and minimizes distortion; this controls rigidity and internal damping and creates high definition audio with a pure, distinct sound.




FMS5XX | 5" 2-WAY OUTDOOR MARINE SPEAKER WITH LED


Frame

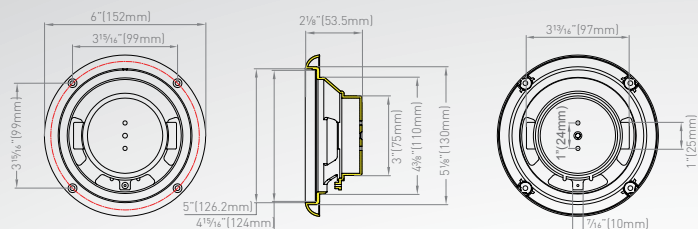


High Panel

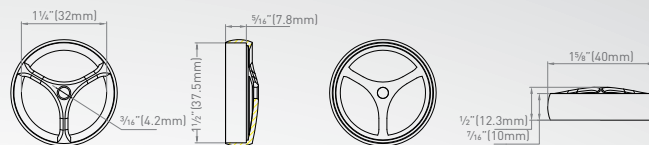


Grill

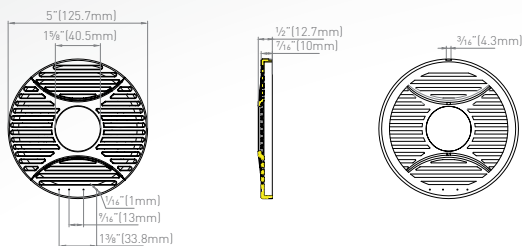

LED Ring

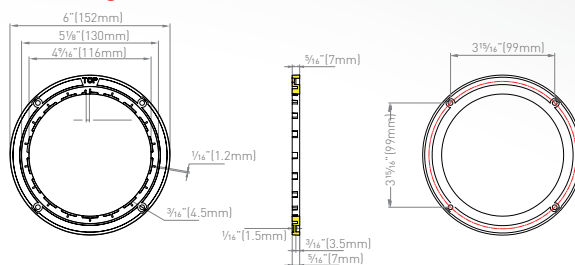

Housing

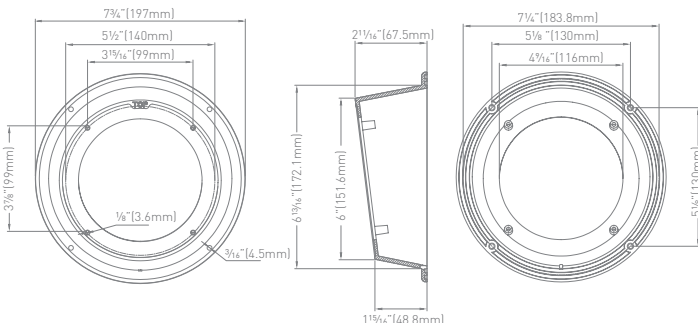

FMS5L2-PS / FMS5L2-BL	5" two-way outdoor marine speaker with LED backlight
FMS5S2-PS / FMS5S2-BL	5" two-way outdoor marine speaker
FMS5S2A-PS / FMS5S2A-BL	5" two-way outdoor marine speaker with LED ring
FMS5L2A-PS / FMS5L2A-BL	5" two-way outdoor marine speaker with LED backlight and LED ring
FMS5LRN.OEM / FMS5LRN.AM	LED ring (Sold separately)
FMS5CMN-PS / FMS5CMN-BL	Mount (Sold separately)

Note: "PS"=white, "BL"=black

Specifications

Impedance	4Ω@1kHz 1V
Frequency	120±20% Hz
Output Sound Pressure Level	82dB
Characteristic Sensitivity	±3dB
Effective Frequency Band	Fo~20kHz
Harmonic Distortion	< 5%
Polarity	1W 85~20kHz Left "+", Right "-"
Temperature Range	-20°C to 70°C / -4°F to 148°F
Rated Power	25W
Max Power	30W
4"/102mm Speaker Driver	30W black PP cone paper woofer
1 1/2" 38mm Speaker Driver	5W hard dome tweeter speaker with black PET cone
Capacitor	4.7uF non-polar capacitor
Ingress Protection	IP55

Packaging Information (FMS5S2A-XX/FMS5L2A-XX)

Packaging Type	Color Gift Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (L x H x W)	6 5/8" x 6 5/8" x 2 3/8"
	(160 x 160 x 60mm)
Individual Packaging Gross Weight (kg/lbs)	0.6/1.32
Individual Packaging Net Weight (kg/lbs)	0.54/1.19

Packaging Information (FMS5LRN.AM)

Packaging Type	PE Bags
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (L x H x W)	6 3/4" x 8 3/4" x 1 1/16"
	(170 x 222 x 0.09mm)
Individual Packaging Gross Weight (kg/lbs)	0.051/0.112
Individual Packaging Net Weight (kg/lbs)	0.045/0.098