

60" BUILT-IN ELECTRIC **FIREPLACE**

FF60SW15A



FF60SW15A-BL



FF60SW15A-SS













SLIDE-OUT SAFETY CUT-OFF CONTROL SETTINGS












- Flame effect technology: traditional flame
- 4 flame brightness settings
- Black tempered glass front panel
- LED control board
- Temperature control


- Slide-out safety cut-off: close proximity sensor switches power off automatically
- Adjustable temperature settings from 65°F to 95°F
- Timer setting up to 5 hours
- Remote control included.

FF60SW15A 60" BUILT-IN ELECTRIC FIREPLACE

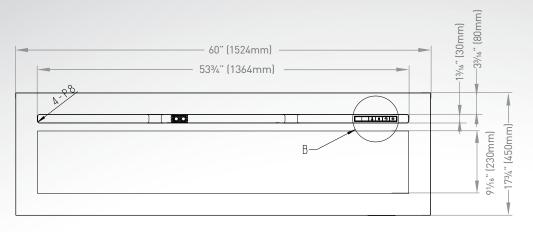







Specifications

| Rated Voltage | AC 120V/60Hz |
|-------------------|--------------|
| Heating Output | 750W/1500W |
| LED Control Board | $\sqrt{}$ |
| Timer | $\sqrt{}$ |
| Log Fuel Effect | $\sqrt{}$ |
| Remote Type | IR |

Dimensions

| Product Size (Wx H x D) | 60" x 17 ³ / ₄ " x 6 ¹ / ₄ " |
|---|--|
| | (1524 x 450 x 158mm) |
| Packaging Information | |
| Packaging Type | Brown Carton Box |
| Quantity Per Box (pcs) | 1 |
| Individual Packaging Dimensions (W x H x D) | 623/8" x 22 ¹³ /16" x 8" |
| | (1583 x 577 x 202mm) |
| Individual Packaging Gross Weight (kg/lbs) | 29/64 |
| Individual Packaging Net Weight (kg/lbs) | 27/59.6 |
| Container Load Information | |
| 45' HQ Container Load (pcs) | 460 |
| * Note: "√"=Equipped | |