

FURRION

3" OUTDOOR MARINE SPEAKER
WITH MOUNT

FMS3X

FMS3B


FMS3W



- Audio optimized for recreational vehicles
- PP reinforced cone extends frequency response and minimizes distortion; this controls rigidity and internal damping, delivering high definition audio with pure, distinct sound



FMS3X | 3" OUTDOOR MARINE SPEAKER WITH MOUNT

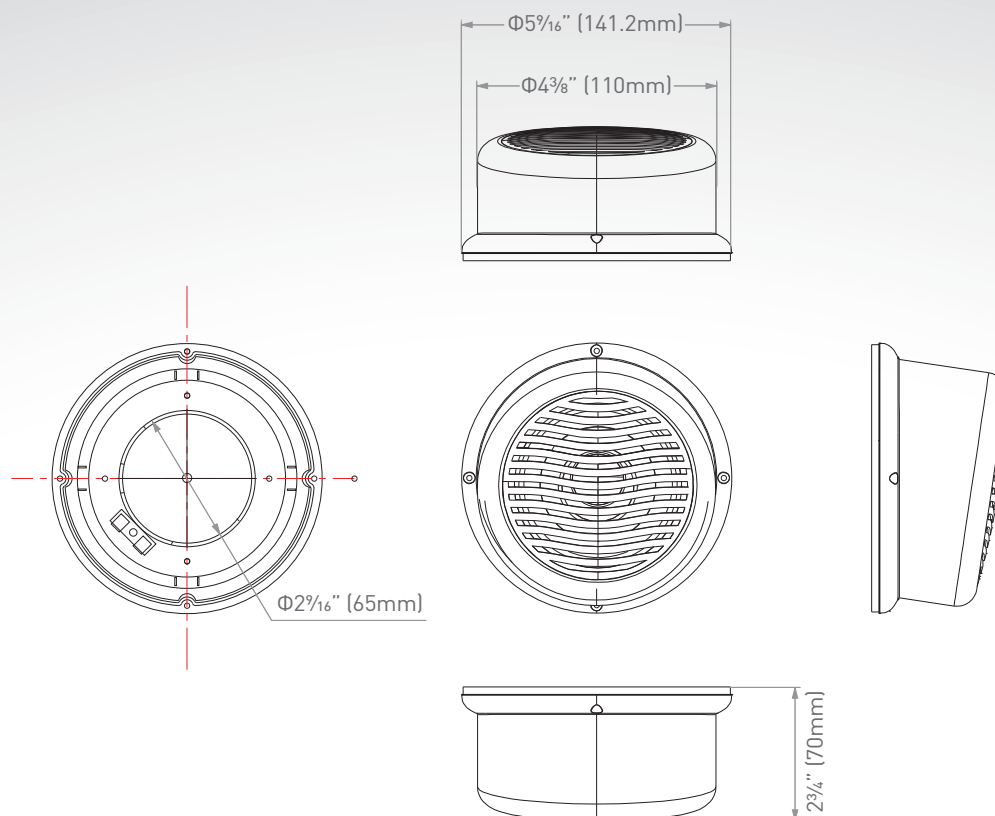

Specifications

Voice Coil Electro Impedance	4Ω@1kHz 1V
Resonance Frequency	130±20% Hz
Output Sound Pressure Level	83dB
Characteristic Sensitivity	±3dB
Effective Frequency Band	Fo~20kHz
Harmonic Distortion	5% < 1W ≥ 130~10kHz
Power Usage	Left "+", Right "-"
Temperature Range	-20°C to 70°C / -4°F to 158°F
Max Power	20W
Product Compatibility	Furrion stereo products

Packaging Information

Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (L x H x W)	6 1/2" x 5 1/16" x 3" (165 x 150 x 75mm)
Individual Packaging Gross Weight (kg/lbs)	0.5/1.1
Individual Packaging Net Weight (kg/lbs)	0.4/0.9

Master Carton

Packaging Type	Master Carton Box
Quantity Per Box (pcs)	24
Master Carton Dimensions (L x H x W)	18 5/16" x 13 5/16" x 12 1/16" (465 x 338 x 325mm)
Master Carton Gross Weight (kg/lbs)	12.9/28.4
Master Carton Net Weight (kg/lbs)	10.9/24.0