## melr.




## **FEATURES**

- Refer to the Meir website for warranty terms & conditions, and available finishes
- 1/4 turn 85mm ceramic spindle
- Flow rate 20 I/min
- · Solid brass construction
- Required Parts MSABR00/MP13
- Box Weight 0.8Kg

### **CARE**

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools)directlytoproduct.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.

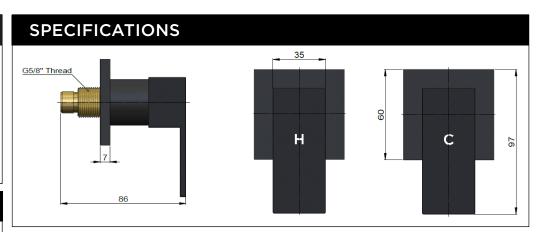

# Torance above wall body face Wall Body Face

## FLOW RATE GRAPH 32 28 24 20 16 10 12 8 4 0 0.15MPa 0.25MPa 0.35MPa 0.35MPa 0.5MPa Pressure Mixed water

## **CREDENTIALS**

Watermark AS/NZS 3718 WMKA 20374

