

TOP TUBE ADAPTER INSTRUCTIONS


Before using this product measure the distance on your bike between the handlebar stem and the seat post. The minimum distance should not be less than 18" (46cm) or greater than 28" (71cm).

⚠️ WARNINGS:


- ✓ Bicycles and bike racks that are not properly attached can fall onto the roadway potentially causing serious accidents resulting in injuries.
- ✓ Always make sure that the bike rack is securely attached to the vehicle and that the bicycles are securely attached to the rack.
- ✓ Before using the Top Tube Adapter check to make sure the handlebar stem and seat post are tightly attached to the bicycle, and the seat securely attached to the seat post.
- ✓ Check that the large U-shaped yoke on the adapter is correctly attached to the handlebar stem with the clevis pin completely through the two holes in the yoke and properly closed. Check the small "U"-hook on the opposite end of the adapter is securely positioned around the seat post.
- ✓ Always inspect Top Tube Adapter is working properly, particularly spring tension and yoke clevis pin - do not use if any part is missing or damaged.
- ✓ Do not use if the tension spring does not function properly as adapter will not remain securely attached to seat post and bike could fall off the bike rack.
- ✓ Maximum bicycle weight 45 lbs. Not for use with e-bikes.

Assembly Instructions: Steps 1-3 • User Instructions: Steps 4-7


1. Insert U Shape Yoke Tube into Hook Tube by aligning grooves of U Shape Yoke Tube to the pin.

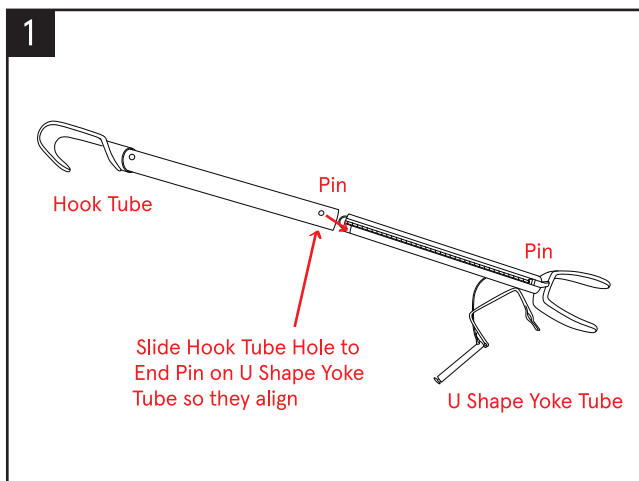


2. Insert Carriage Bolt, in the square hole while attaching the nut, plastic washer first, on the round hole side.

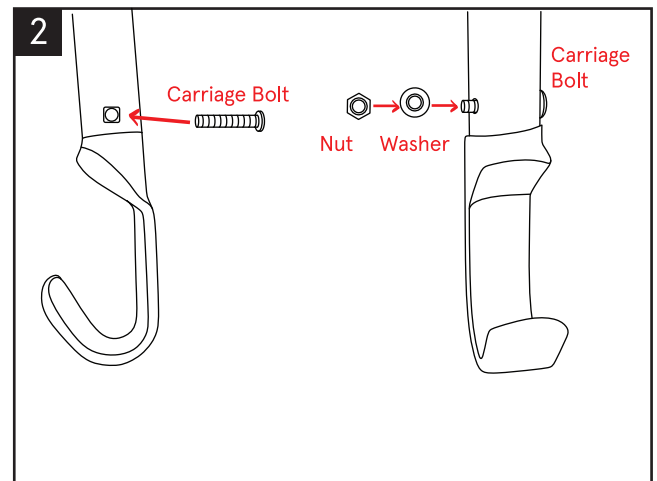


3. Screw nut onto the Carriage Bolt and tighten to make the nut flush with the screw.

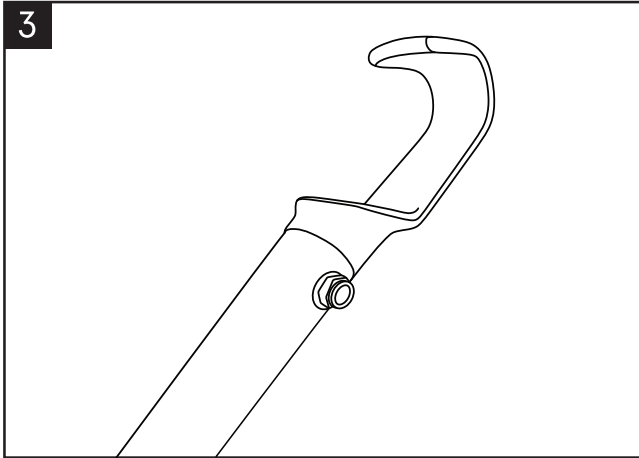


4. Make sure the handlebar stem and seat post are tightly attached to the bicycle, and the seat securely attached to the seat post.

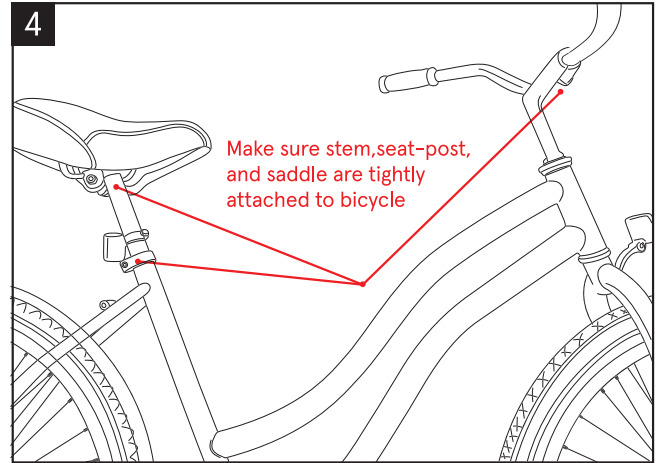


5. Attach the large U-shaped yoke to the handlebar stem, insert the clevis pin completely through the two holes in the yoke, making sure the retainer clip is properly closed.

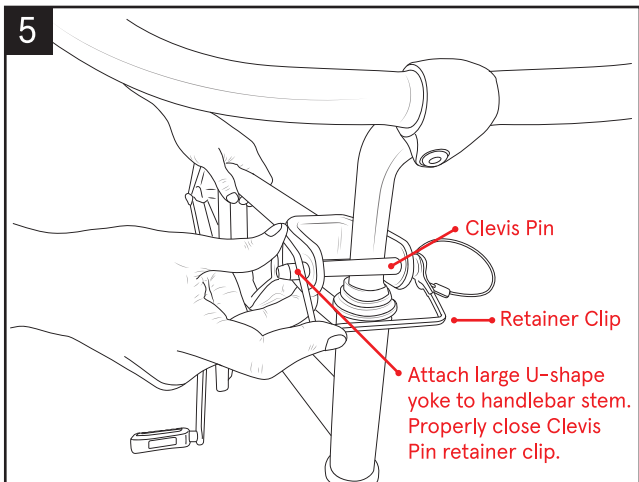

6. Extend the adapter by pulling on the main shaft, and attach the small "U"-hook around the seat post.

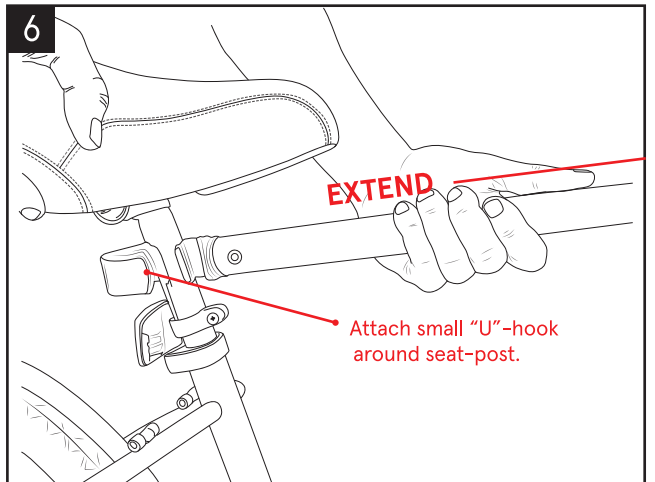

7. Before placing the bike onto the bike rack, pick up the bike by the adapter and test to make sure it is securely attached to the bike.

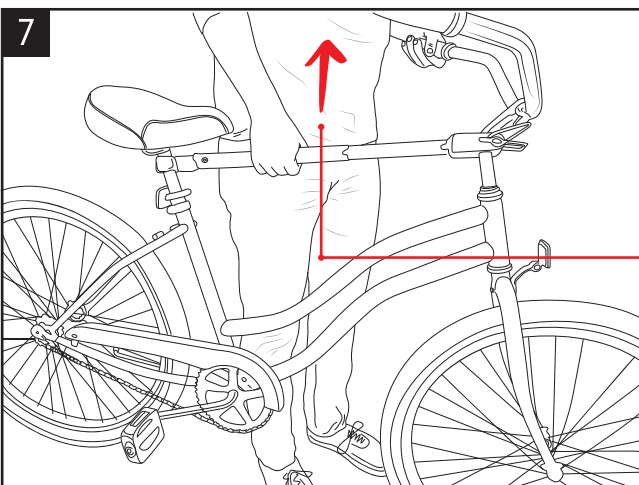

Lift up and down to make sure the Top-Tube Adapter is securely attached to the bike.