
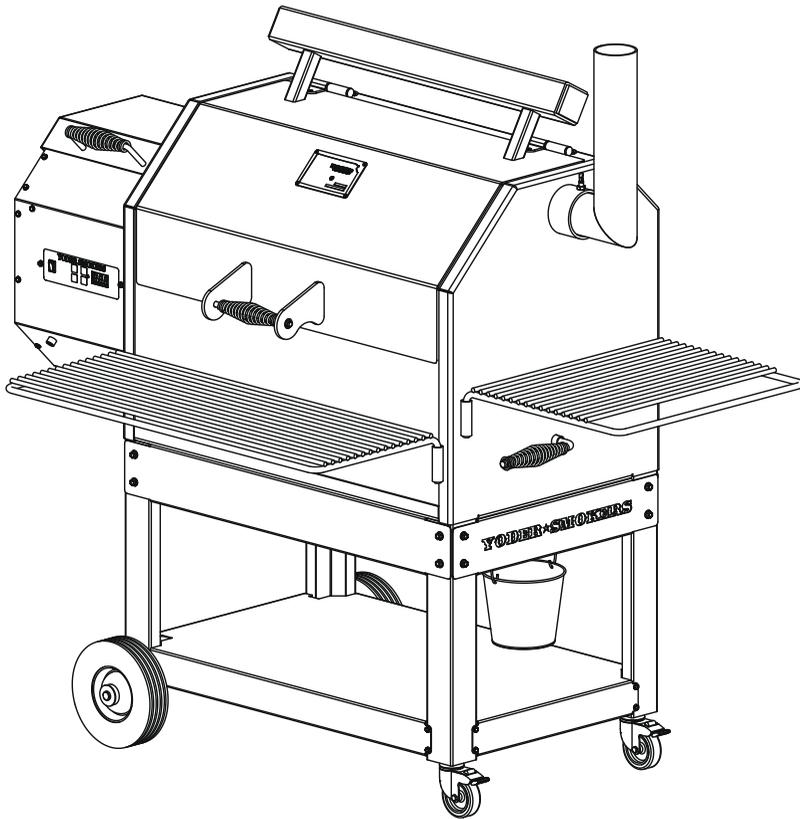
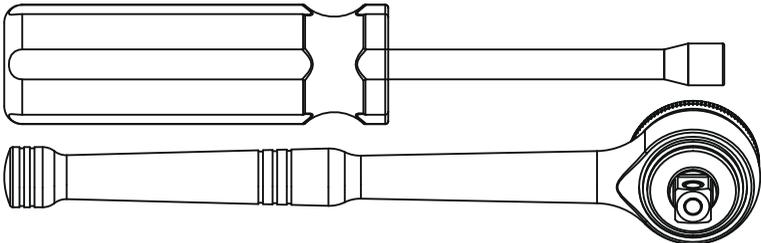



★ **YODER SMOKERS** ★
COMPETITION GRADE BBQ PRODUCTS

ASSEMBLY INSTRUCTIONS
YS480 PELLETT COOKER - 24"
YS640 PELLETT COOKER - 32"

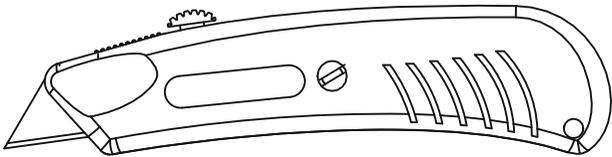


RECOMMENDED TOOLS

<p>NUT DRIVERS OR SOCKET WRENCH</p>	
<p>5/16" SOCKET</p>	
<p>3/8" SOCKET</p>	
<p>7/16" WRENCH</p>	
<p>BOX CUTTER OR UTILITY KNIFE</p>	

Step #1

Place pallet on a flat, level surface. Cut and discard banding. With the help of **another person**, tilt box on end so arrows on the box point up. Remove pallet from assembly area. **FIG 1**



****Note: Use Caution! Box may weigh 350 lb depending on model.**

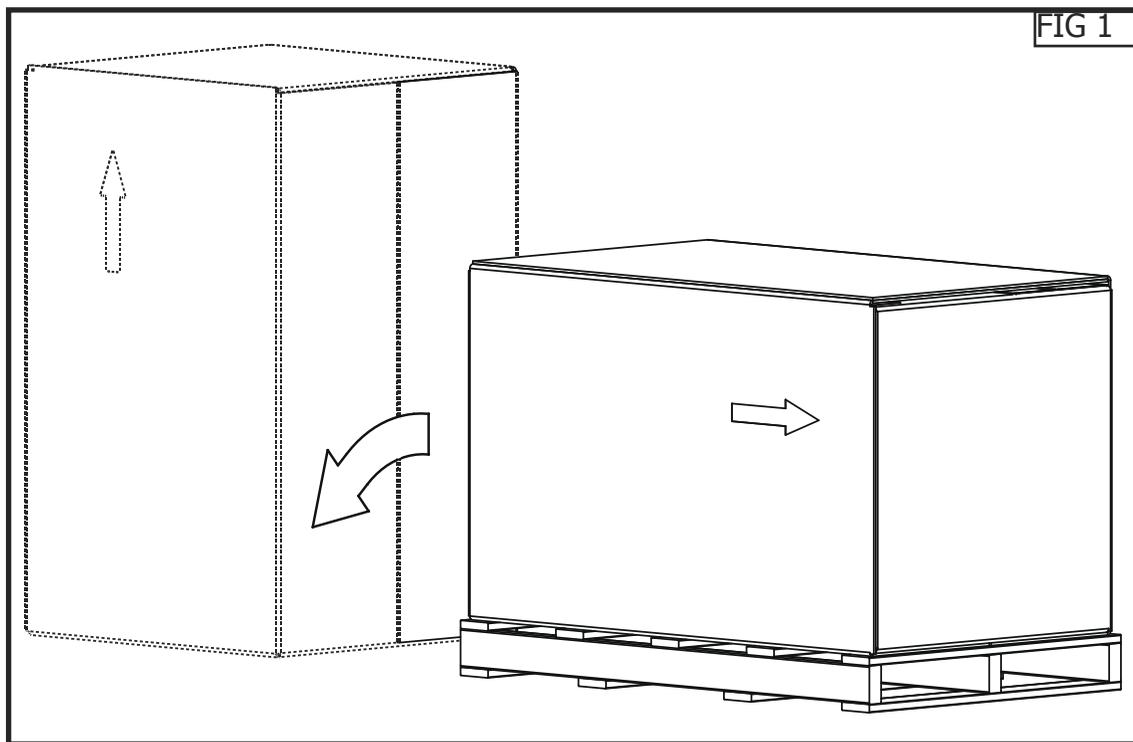

Step #2




Carefully open box by cutting tape and opening the flaps. Locate and remove assembly instructions from envelope marked "Instructions Enclosed." Read instructions thoroughly before continuing assembly. Remove boxes and materials as shown. **FIG 2**

LEAVE MAIN BOX AND INDICATED PACKAGING INTACT AROUND SMOKE CHAMBER! Removal will decrease stability during assembly, and may cause the unit to fall over. **FIG 3**

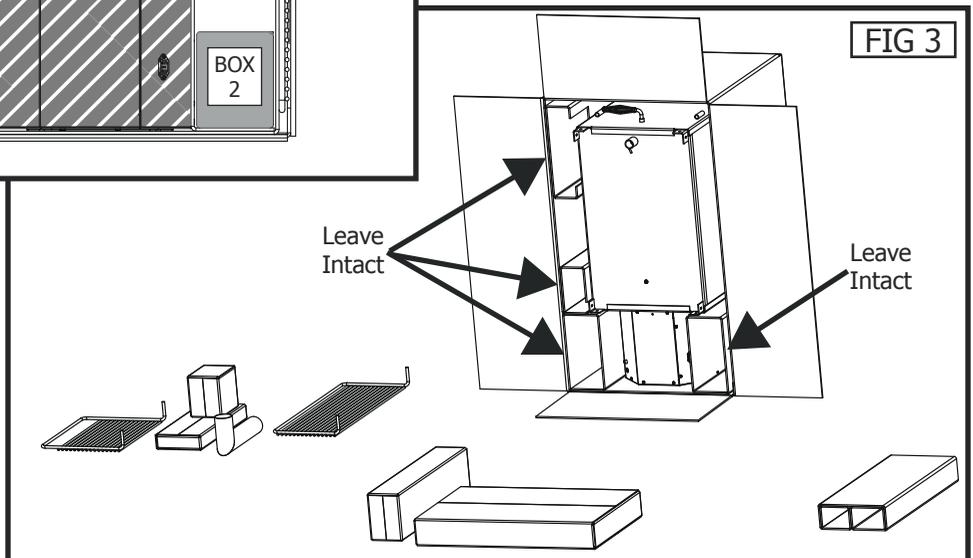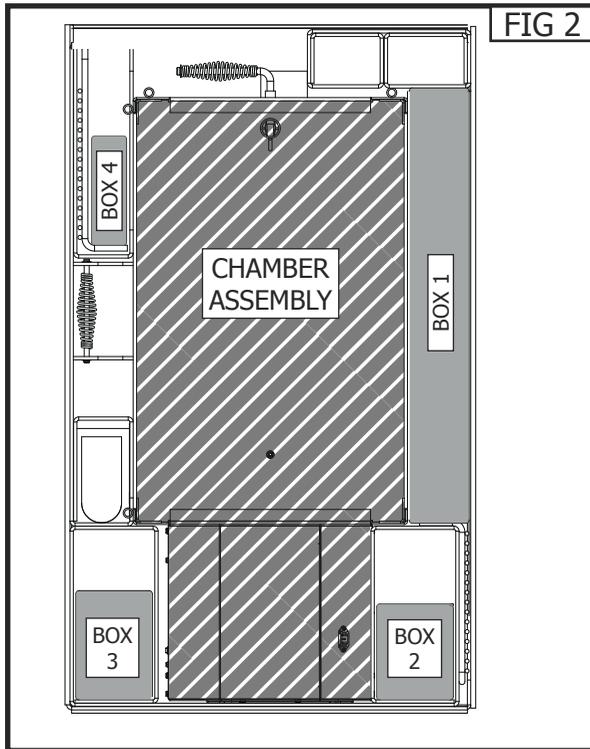


Step #3

Locate and open box 1. Gather parts A (Hardware Package - Qty. 1), B (Bottom Shelf - Qty. 1), G (Yoder Logo Skirt – Qty. 2), and H (Long Skirt – Qty. 2). Set remaining pieces aside. The Operations Manual will instruct you where to use the unlabeled parts.

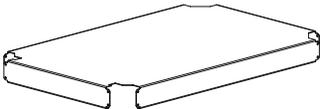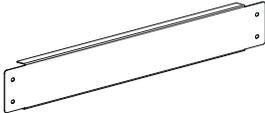
PART ID	DESCRIPTION	ILLUSTRATION	QTY
A	A91842 HARDWARE PACKAGE		1
B	90093 BOTTOM SHELF (YS480)		1
	90172 BOTTOM SHELF (YS640)		
G	90165 YODER LOGO SKIRT		2
H	90092 LONG SKIRT (YS480)		2
	90166 LONG SKIRT (YS640)		

Locate and open box 2. Gather parts C (Leg – Qty. 1), D (Leg – Qty. 1), E (Caster Leg – Qty. 2), and F (Wheel – Qty. 2).




PART ID	DESCRIPTION	ILLUSTRATION	QTY
C	W90783 LEG		1
D	W90785 LEG		1
E	A91726 CASTER LEG		2
F	24252 WHEEL		2

Step #4

Parts Required:

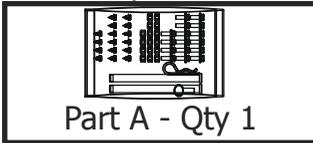


Locate part A and empty contents of bag. Carefully sort and confirm all pieces are accounted for.

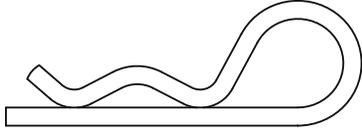HARDWARE LIST	
A1 90398 AXLE PIN - QTY: 2	
A2 701-212-02 COTTER PIN - QTY: 2	
A3 1016X38HHSMS SHEET METAL SCREW - QTY: 16	
A4 1420X58WHB WHIZ BOLT - QTY: 16	
A5 1420LNN HEX NUT - QTY: 16	

Step #5

Parts Required:

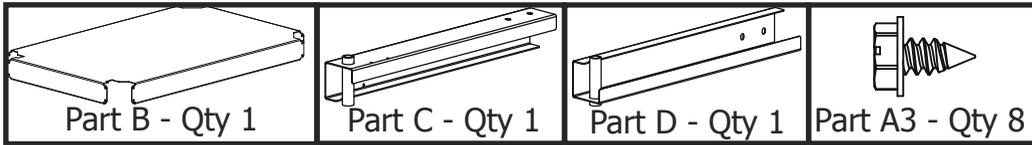


Locate part B. Orient the part with the notched cutouts toward you. These cutouts will be labeled with a C or a D sticker just inside the slot. These labels will match the Part ID of the leg that will be installed in that cutout. **FIG 4**

Lay box 1 flat on the ground. Position part B cross-ways on top of box 1 as shown with the notched cutouts toward you. Orient part with the B decal facing down. Locate part C. Carefully slide part downward through the indicated slot in part B until the holes align. **FIG 5**


Using a 5/16" nut driver or socket wrench, attach part C to part B with four A3 screws. Use caution to not overtighten the screws! The screws are tight when the head of the screw is flush with the sheet metal. **FIG 6**

Locate part D. Carefully slide part downward through the indicated slot in part B until the holes align. Using a 5/16" nut driver or socket wrench, attach part D to part B with four A3 screws. Use caution to not overtighten the screws! The screws are tight when the head of the screw is flush with the sheet metal. **FIG 7**

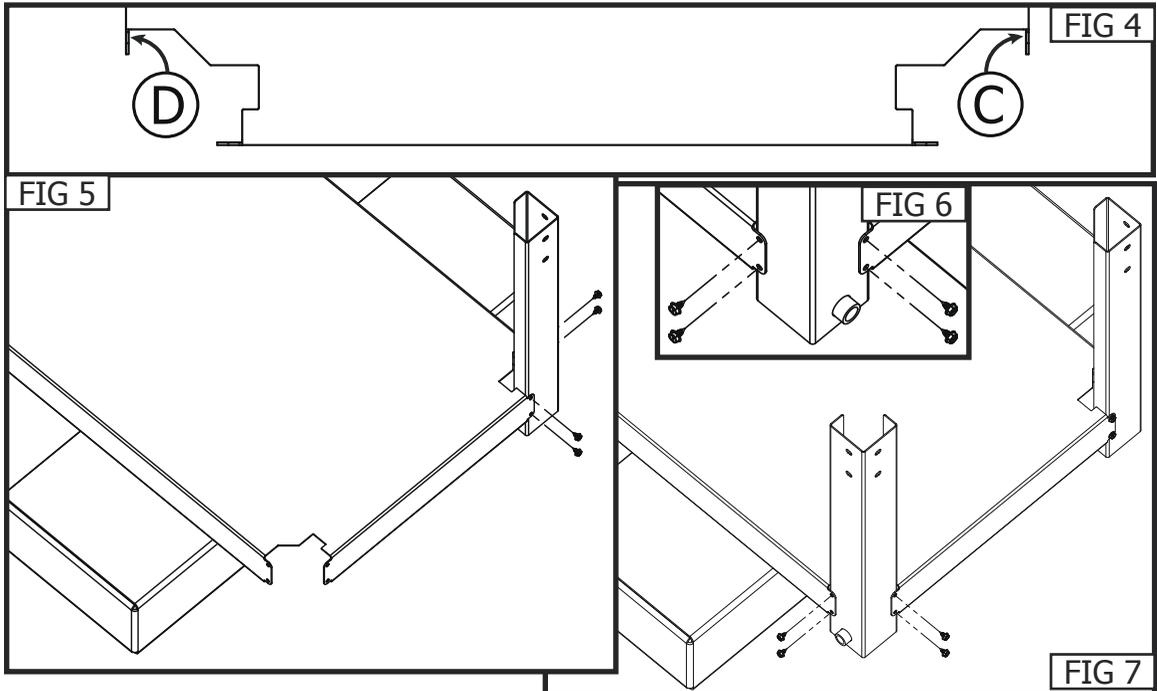

Step #6



Parts Required:

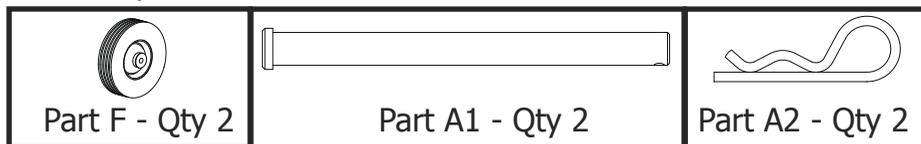

Attach one part F to part C using one A1, and one A2. Insert A1 through part F, and then through the tube in part C until it stops. **FIG 8**


Install part A2 in the small hole at the end of A1. **FIG 9**

Repeat Step #6 to attach wheel to leg D.

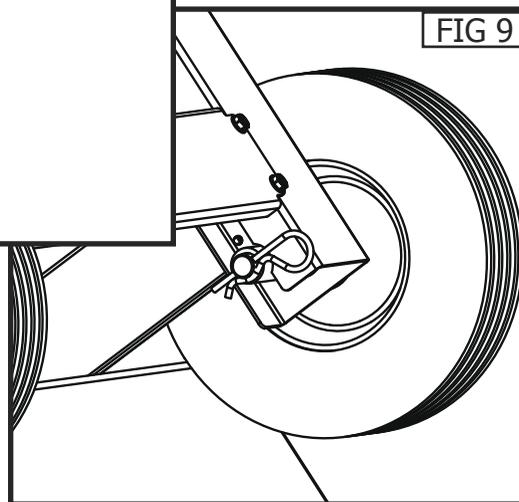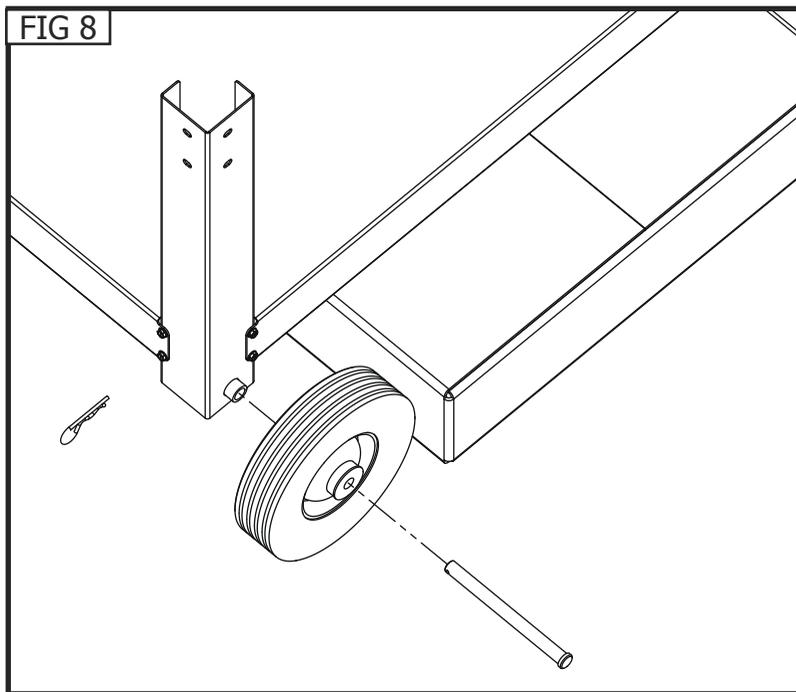

Step #7




Parts Required:

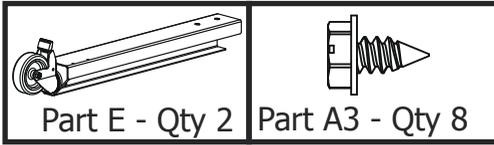

Locate one part E. Carefully slide part downward through one of the open slots in part B until the holes align. **FIG 10**


Using a 5/16" nut driver or socket wrench, attach part E to part B using four A3 screws. Use caution to not overtighten the screws! The screws are tight when the head of the screw is flush with the sheet metal. **FIG 11**

Repeat Step #7 to attach remaining leg to stand assembly. **FIG 12**

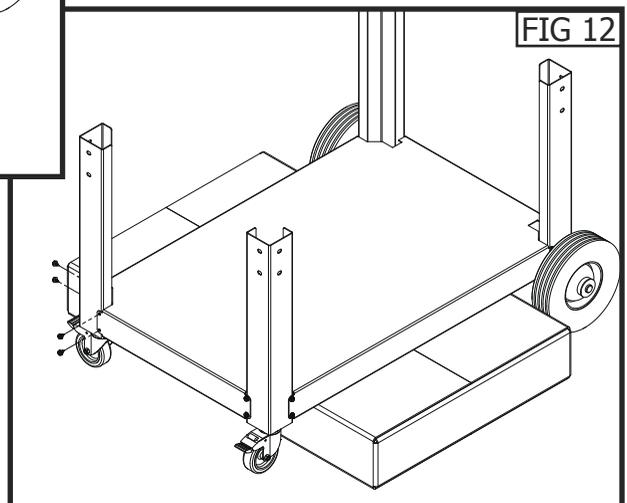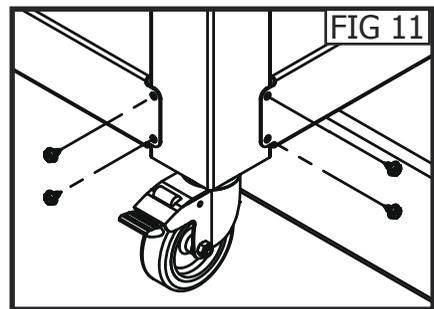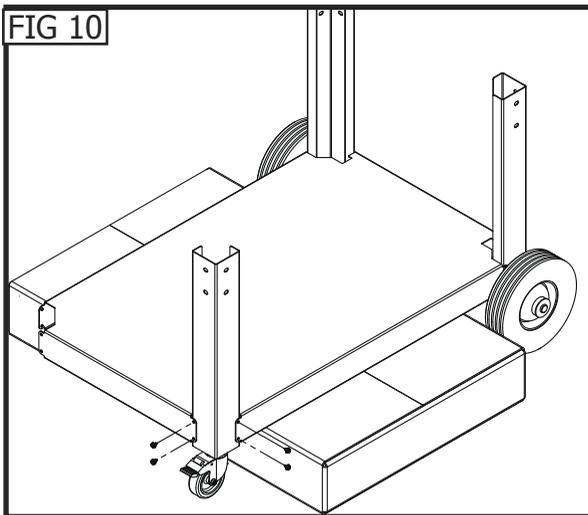

Step #8

Parts Required:

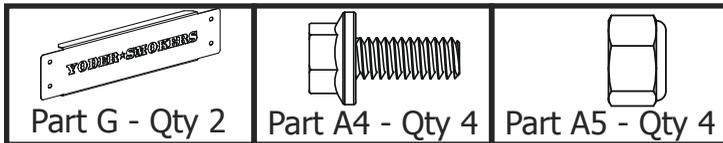


Using two of each A4 & A5, attach one part G to the stand assembly using only the bottom holes in stand assembly. Install part G with diagonal corners on top, as shown below. Hand-tighten the nuts for now.

FIG 13/ FIG 14


Repeat Step# 8 to attach second part G to stand assembly. **FIG 15**

Note: It may be necessary to lightly "bump" the tops of the legs outwards as shown below in order to align the holes. **FIG 16

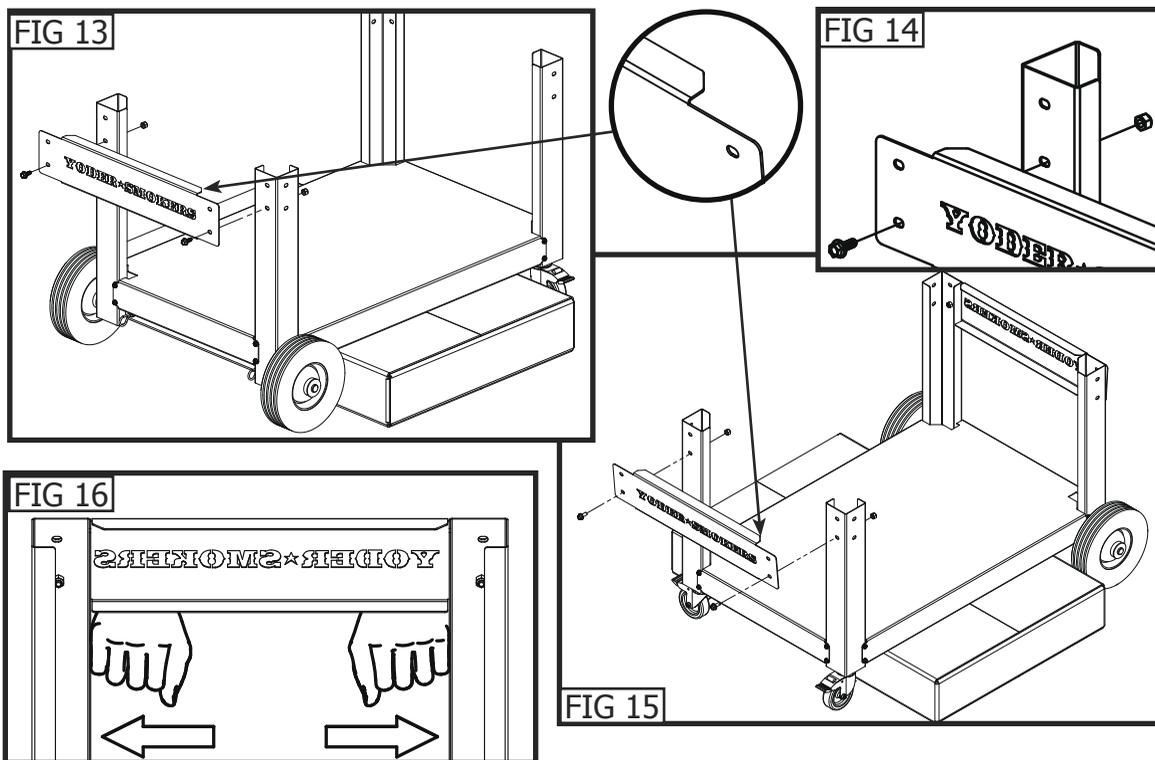

Step #9


Parts Required:

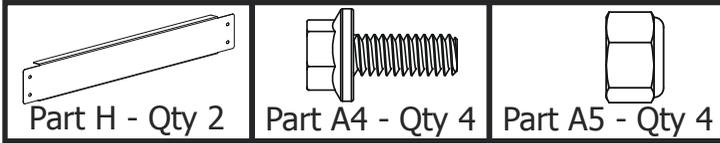

Using two of each A4 & A5, attach one part H to the stand assembly using only the bottom holes in stand assembly as shown. Install part H with diagonal corners on top, as shown below. Hand-tighten the nuts for now. **FIG 17/ FIG 18**

Repeat Step# 9 to attach second part H to stand assembly. **FIG 19**

Note: It may be necessary to lightly "bump" the tops of the legs outwards as shown below in order to align the holes. **FIG 20


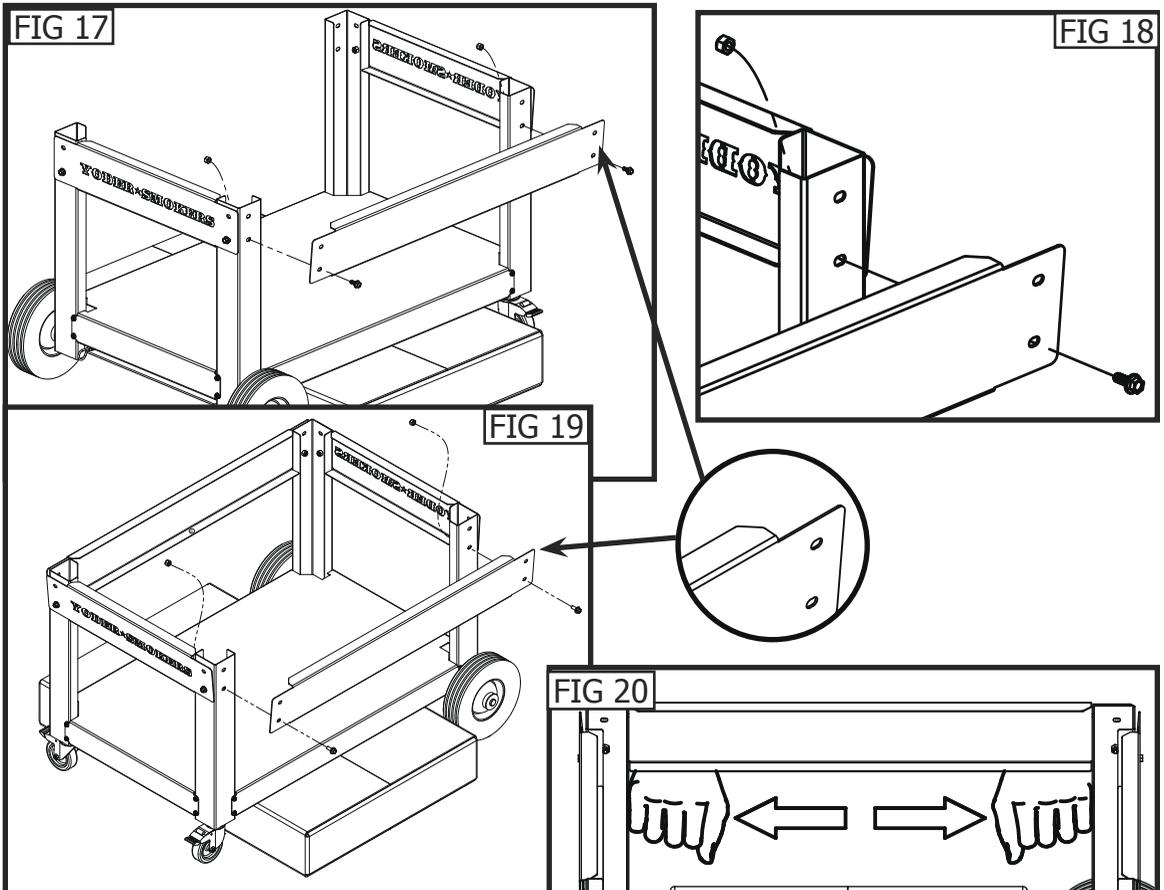


Step #10

Locate chamber legs on Pellet Cooker. **FIG 21**


Pick up stand assembly (large wheels should be down), and carefully guide stand onto chamber legs.

FIG 22

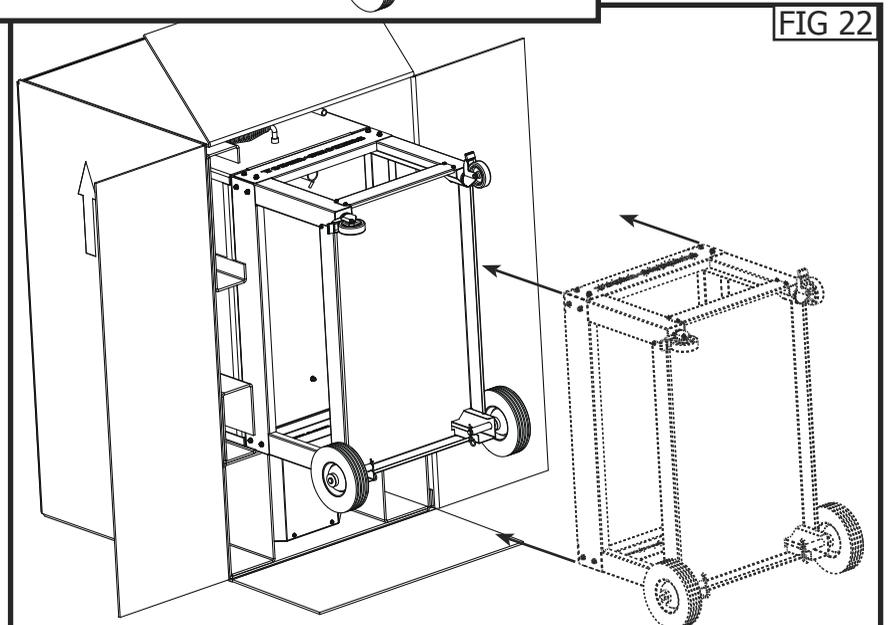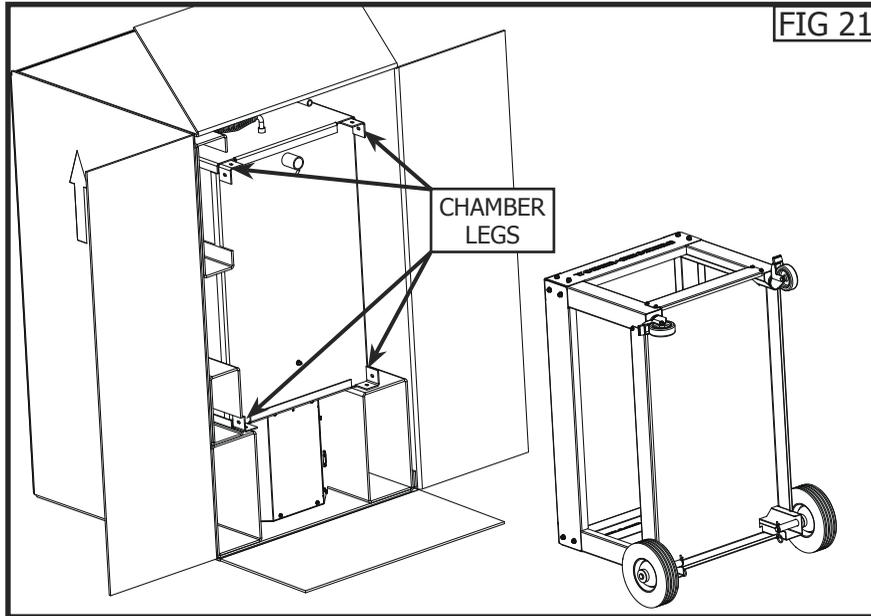

Step #11



Parts Required:

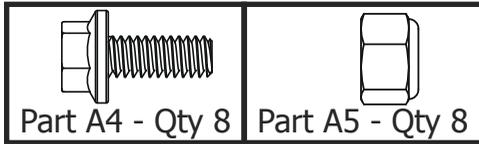

Using two of each A4 & A5, attach stand assembly to the chamber assembly leg through the top holes in the stand assembly, as shown. Hand-tighten the nuts for now. **FIG 23**

Using the remaining six A4 & A5 fasteners, repeat process for the remaining three legs of the stand/chamber assembly. **FIG 24**



Once all of the fasteners are installed and tightened by hand, securely tighten all sixteen fasteners using a 3/8" nut driver or socket wrench, and a 7/16" wrench.

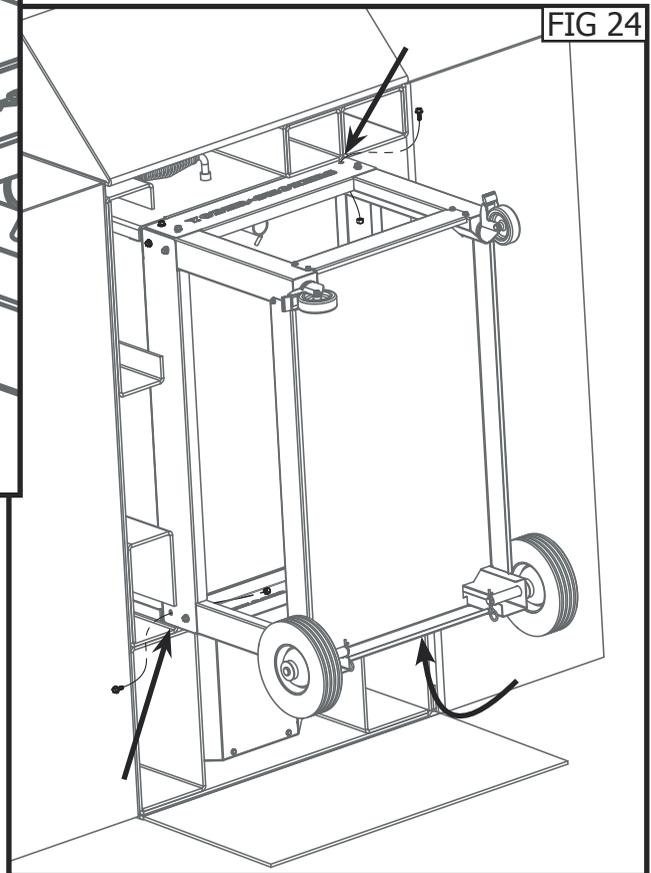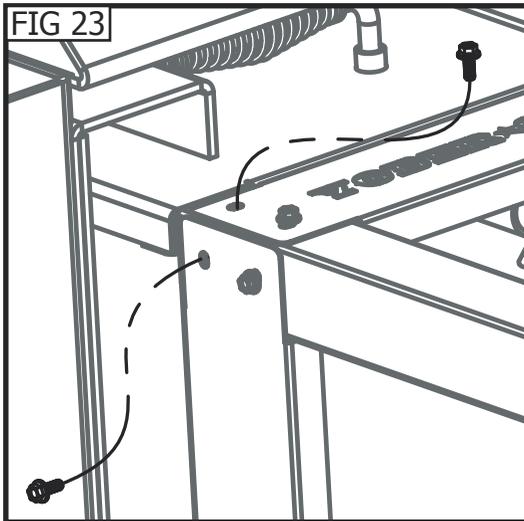

Step #12

Confirm that the stand is fully assembled and all fasteners are tightened. Using a box cutter or utility knife, CAREFULLY cut along top edges of box (dashed lines) as shown. **FIG 25**

Once both cuts are made, fold the flap over the end of the box. **FIG 26**

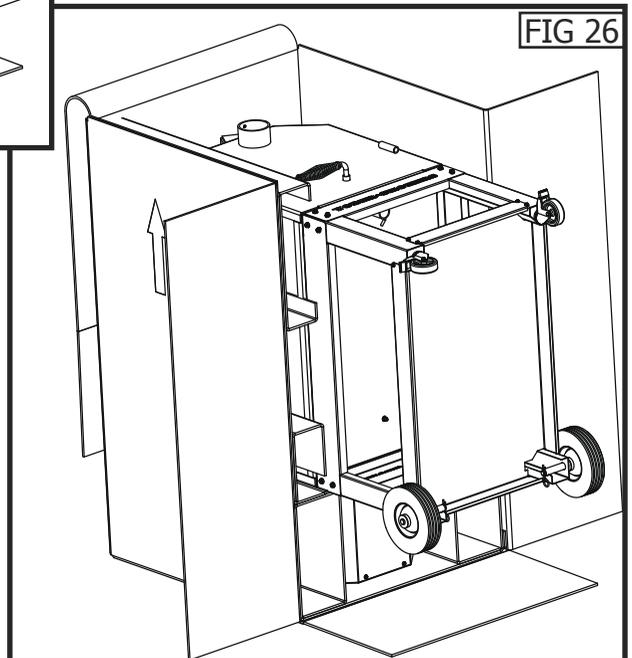
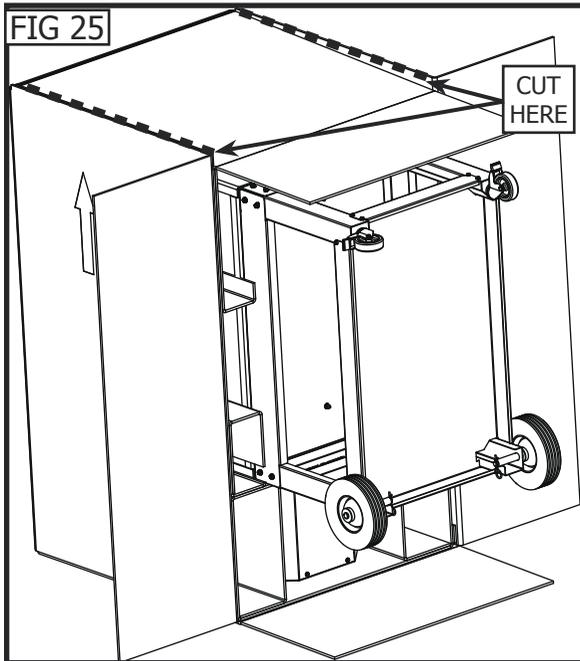


Step #13

With the help of **another person**, carefully tilt the assembled cooker out of the box until the large wheels make contact with the ground. Secure both large wheels from rolling before continuing on with instructions. **FIG 27**

Once the wheels are secured from rolling, continue to tilt cooker out of the box and onto its wheels & casters. **FIG 28**

****Note: Use Caution! Unit may weigh 350 lb depending on model.**

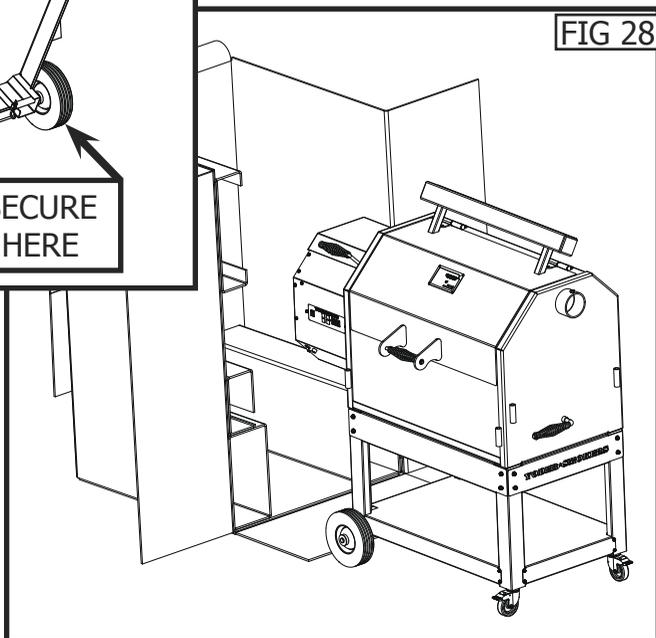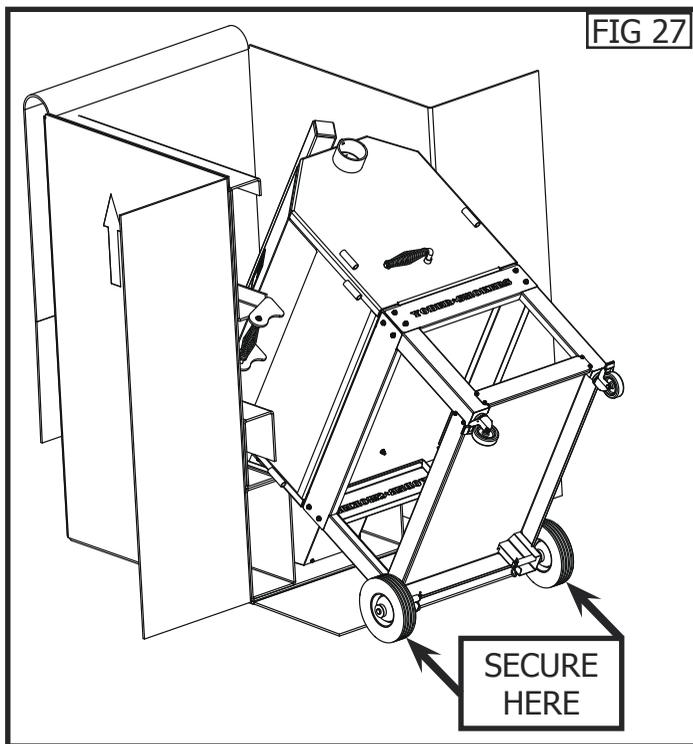

Step #14

Unpack boxes #3 & #4. Locate and read through your Operations Manual (located in box 4) for final assembly and initial start-up instructions. The Operations Manual will provide instruction on how to install or use all of the remaining parts.


Make sure all parts are accounted for before discarding boxing / packaging materials.

For product support call us at:

877.409.6337 ext. 2

or email us at:

customerservice@yodersmokers.com



WWW.YODERSMOKERS.COM