


delta_Δ

Single Bike Adjustable Floor Stand

Assembly instructions RS8600


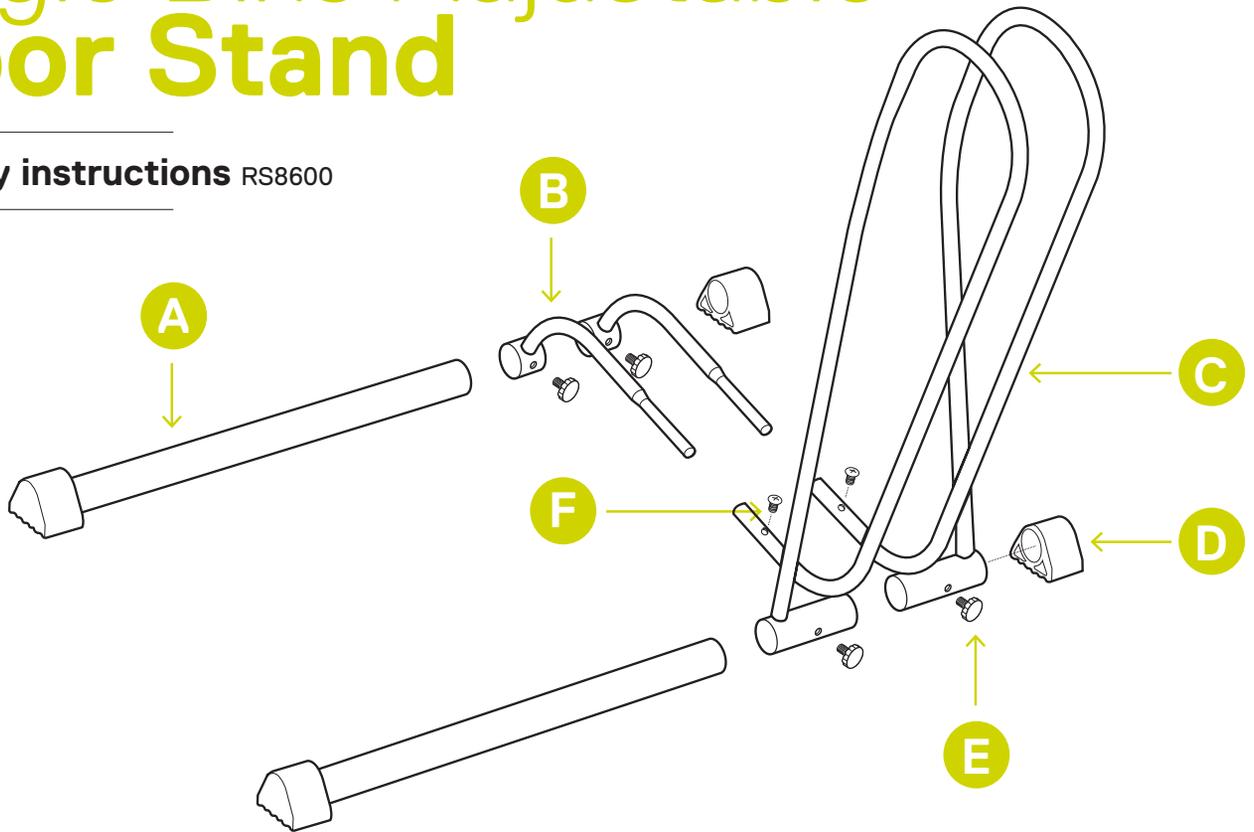


Parts


- A** x2 — Base with Rubber Foot
- B** x2 — Front Arms
- C** x2 — Rear Arms
- D** x2 — Rubber Foot
- E** x4 — Thumb Screws
- F** x2 — Rear Arm Screws

Tool Required


Phillips Head
Screwdriver

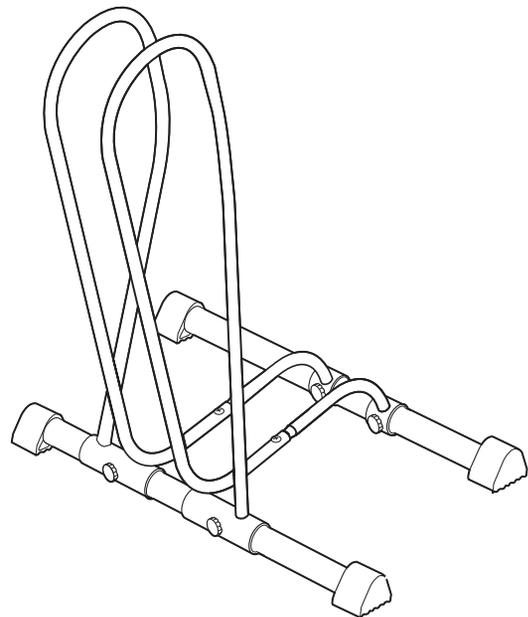


- 1** Attach front and rear arms.
Tighten rear arm screws securely.

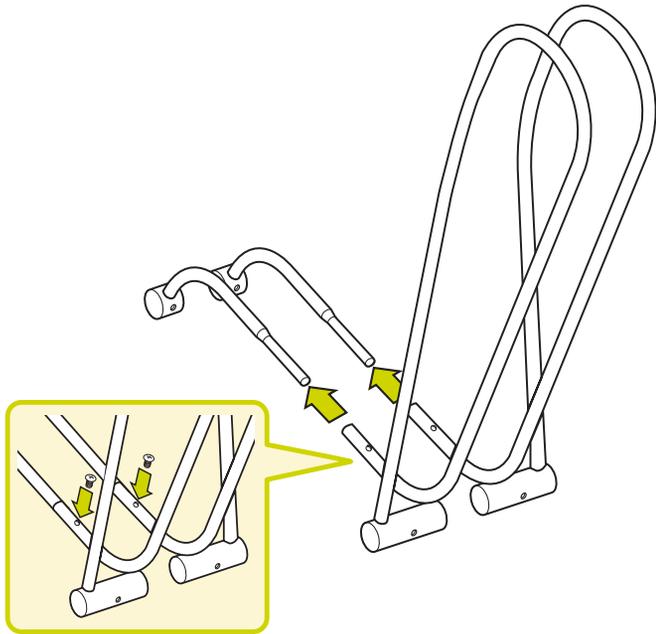

- 2** Slide in base with rubber foot through arms.
Attach rubber foot to opposite end.

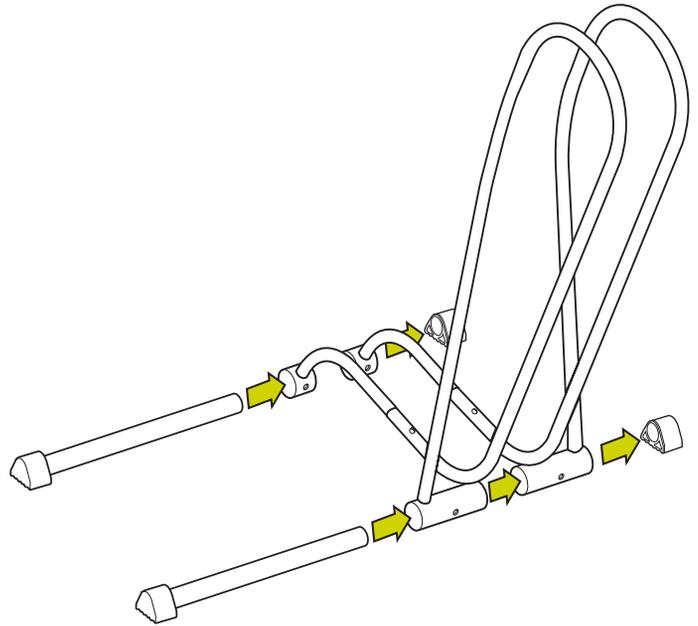


- 1** Position arms as needed,
securely tighten thumb screws.

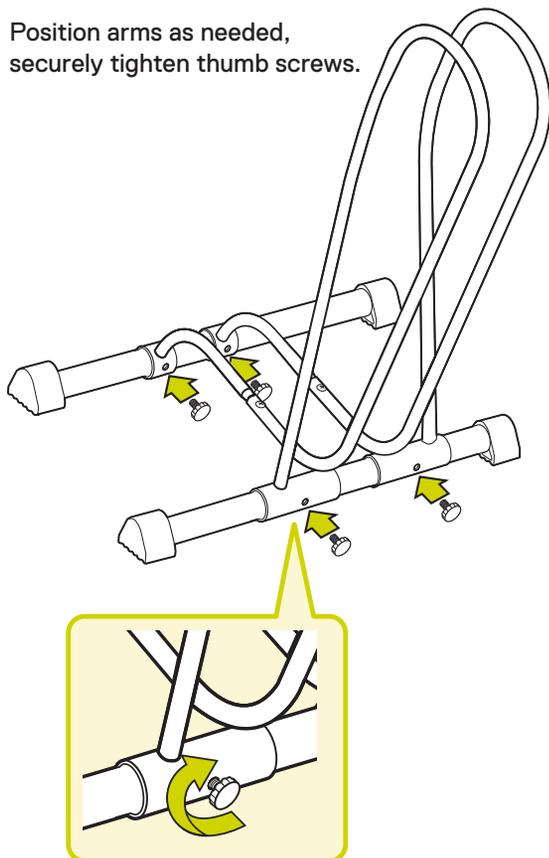

Arm Adjustment:

Simply slide, then lock in place
Precisely holds any wheel size
(from 0.5" to 5")

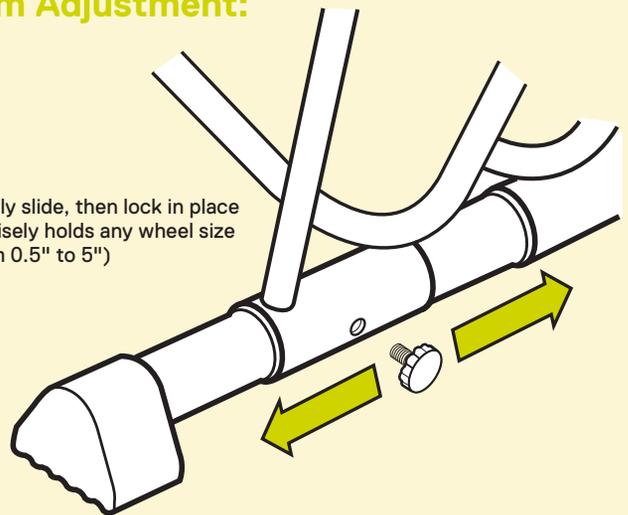

Need help?

Email us at service@designbydelta.com
& we'll help solve your issue.

Assembly video

Visit designbydelta.com/downloads

