

delta

Quick Rack Instant Storage Rack

Assembly instructions WS1003



Parts

A x4 — Leg Tube


B x4 — Extension Tube

C x3 — Shelf

D x2 — Top Tube

E x4 — Collar

F x2 — Joiner

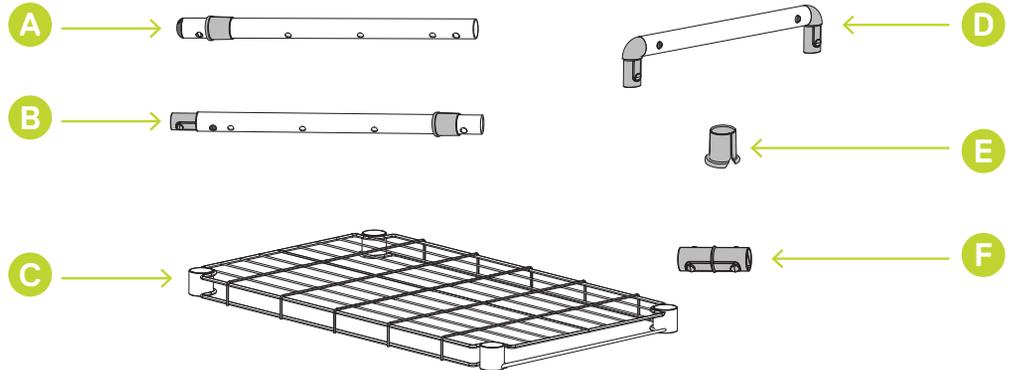

No Tools required!


- 1** Insert the 4 leg tubes (rubber feet on bottom) into the corners of a shelf.




NOTE

Shelves can be mounted either way, as tray or flat shelf.

NOTE:
Holes face
inwards.

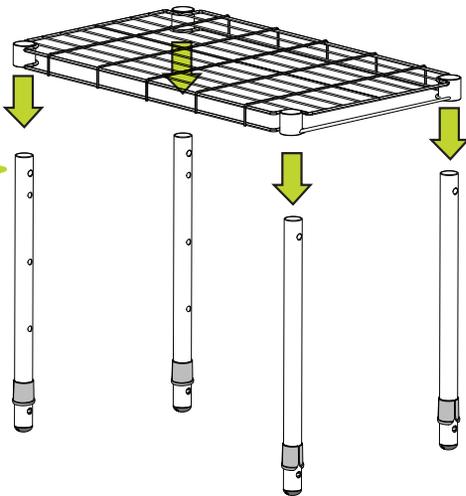

- 2** Slide on next shelf to rest on bottom.

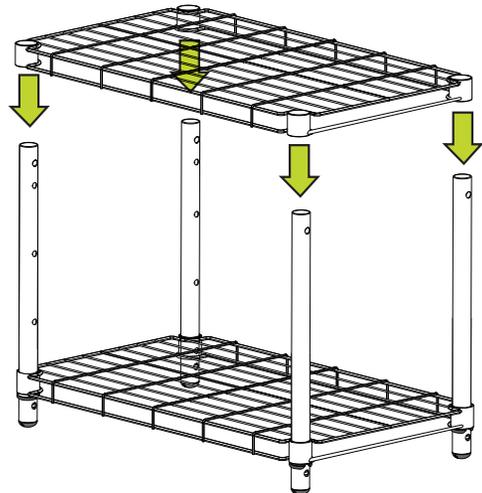


WARNING


Maximum load per shelf (spread evenly): 65lbs (30 kgs)

SAFETY WARNING: Do not use as a step ladder. Never allow children to climb on rack.


- 3 Connect the two top tubes to the 4 extension tubes.

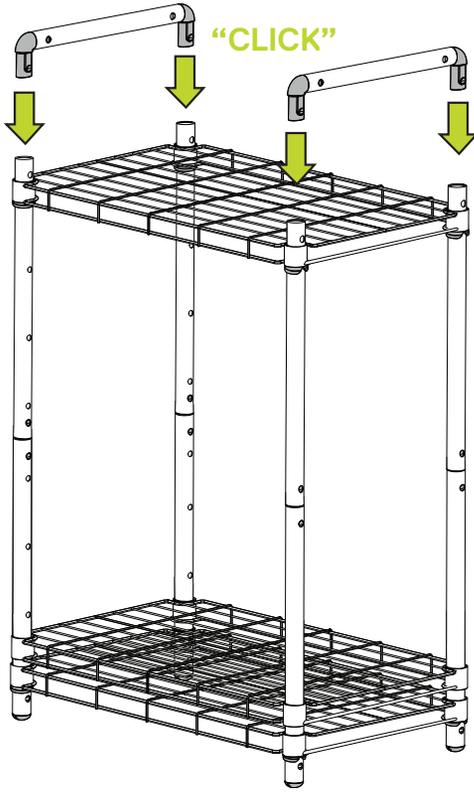



- 4 Determine the desired height of the middle shelf and then slide shelf above the selected holes. Attach the four plastic collars at the desired height.

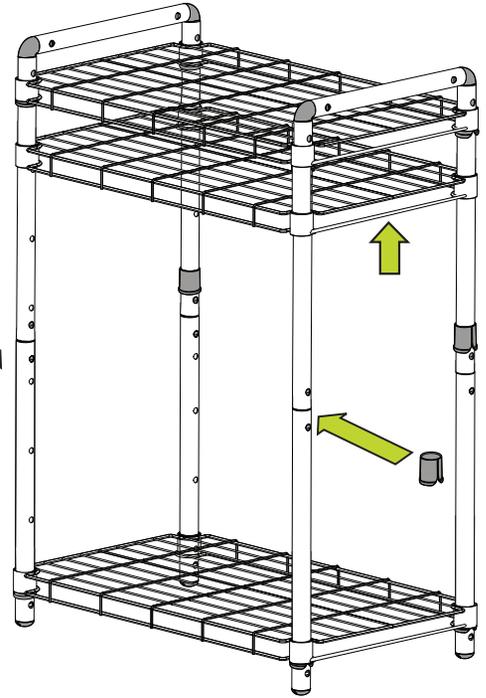

- 5 Press the corners of middle shelf onto the 4 plastic collars. Seat all corners of each shelf onto its plastic collar to keep unit rigid.

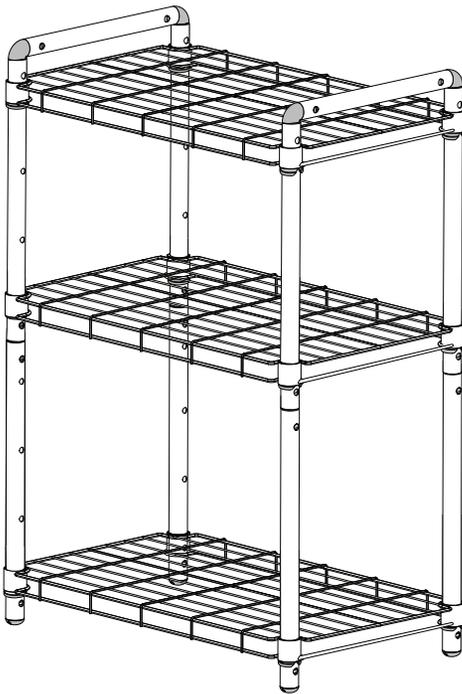

- EXPANDABLE** Two spare joiners are included for stacking extra racks.

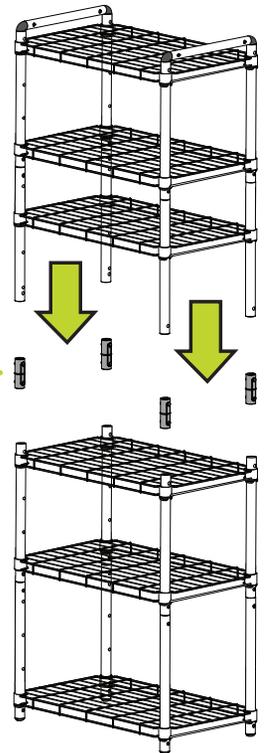

102022

Need help?

Email us at service@designbydelta.com & we'll help solve your issue.

Assembly video

Visit designbydelta.com/downloads

