


# delta

## Slim Floating Shelf

### SHELF 2FT/3FT

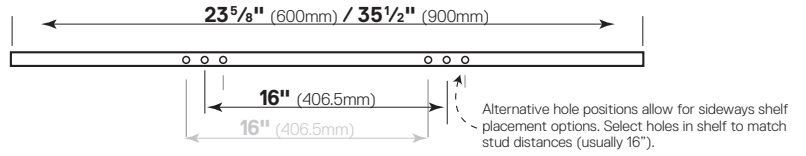


### Assembly instructions (24"/36")

#### Parts

**A** x1 — Floating Shelf

**B** x2 — Invisibolt


#### Tools Required

1/4" Wrench (6.35mm) 

Hand Drill 1/8"(3mm) 

Level 

Way of locating studs within the wall (see hardware store for advice)

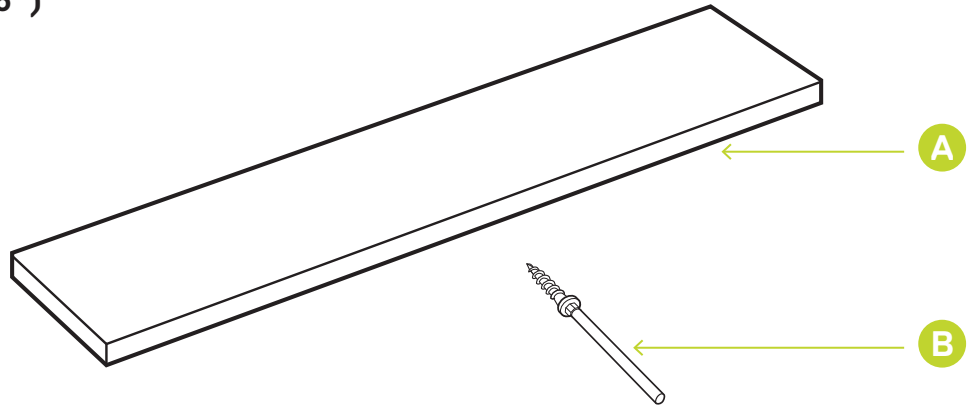

**1** Locate Stud behind wall at desired location for shelf. Ensure that shelf is mounted into at least one stud. If stud mounting is not possible visit [designbydelta.com/collections/shelving](http://designbydelta.com/collections/shelving) for hollow wall mounting solution


**2** Use actual shelf back to determine and mark where mounting holes need to be drilled. Note: Holes in shelf should align with normal 16" stud distances. Use spirit level to ensure shelf will be horizontal.

**3** Drill 1/4" (6mm) pilot holes at 90° to wall.

**! IMPORTANT SAFETY NOTE**  
Beware of drilling into electrical wire or pipes within wall!

**4** Insert InvisiBolt™ into drill (See Fig: 1) and secure into holes from Step 3. Note: If needed, adjust installed InvisiBolt™ with wrench to ensure 90° angle.

**5** Attach shelves onto brackets, pressing completely against the wall.

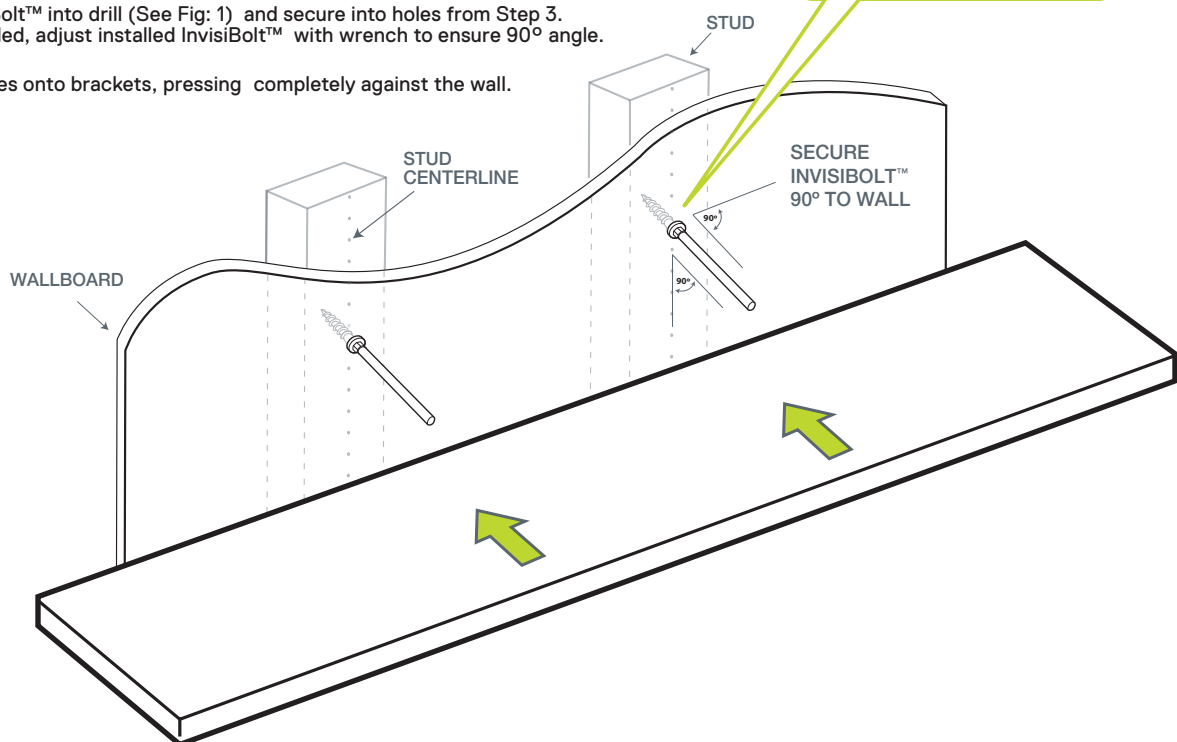

### WARNING

Do not allow children to play or hang from shelf  
Maximum weight on properly installed shelf is 33lbs, 15 KGS evenly distributed.