


delta_Δ

Four Bike Free-Standing Rack

Assembly instructions HDRS6800

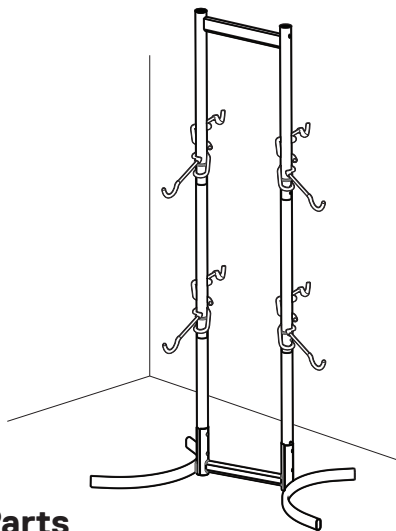

Parts


- A** x1 — Top Connector
- B** x2 — Top Pole
- C** x2 — Center pole
- D** x2 — Bottom Pole
- E** x2 — Base Stand
- F** x1 — Base Bracket
- G** x6 — Long Bolts
- H** x8 — Arms
- I** x4 — Short Bolts
- J** x4 — Nuts
- K** x4 — Washers

Tool(s) Required

Phillips Head



Adjustable
Wrench

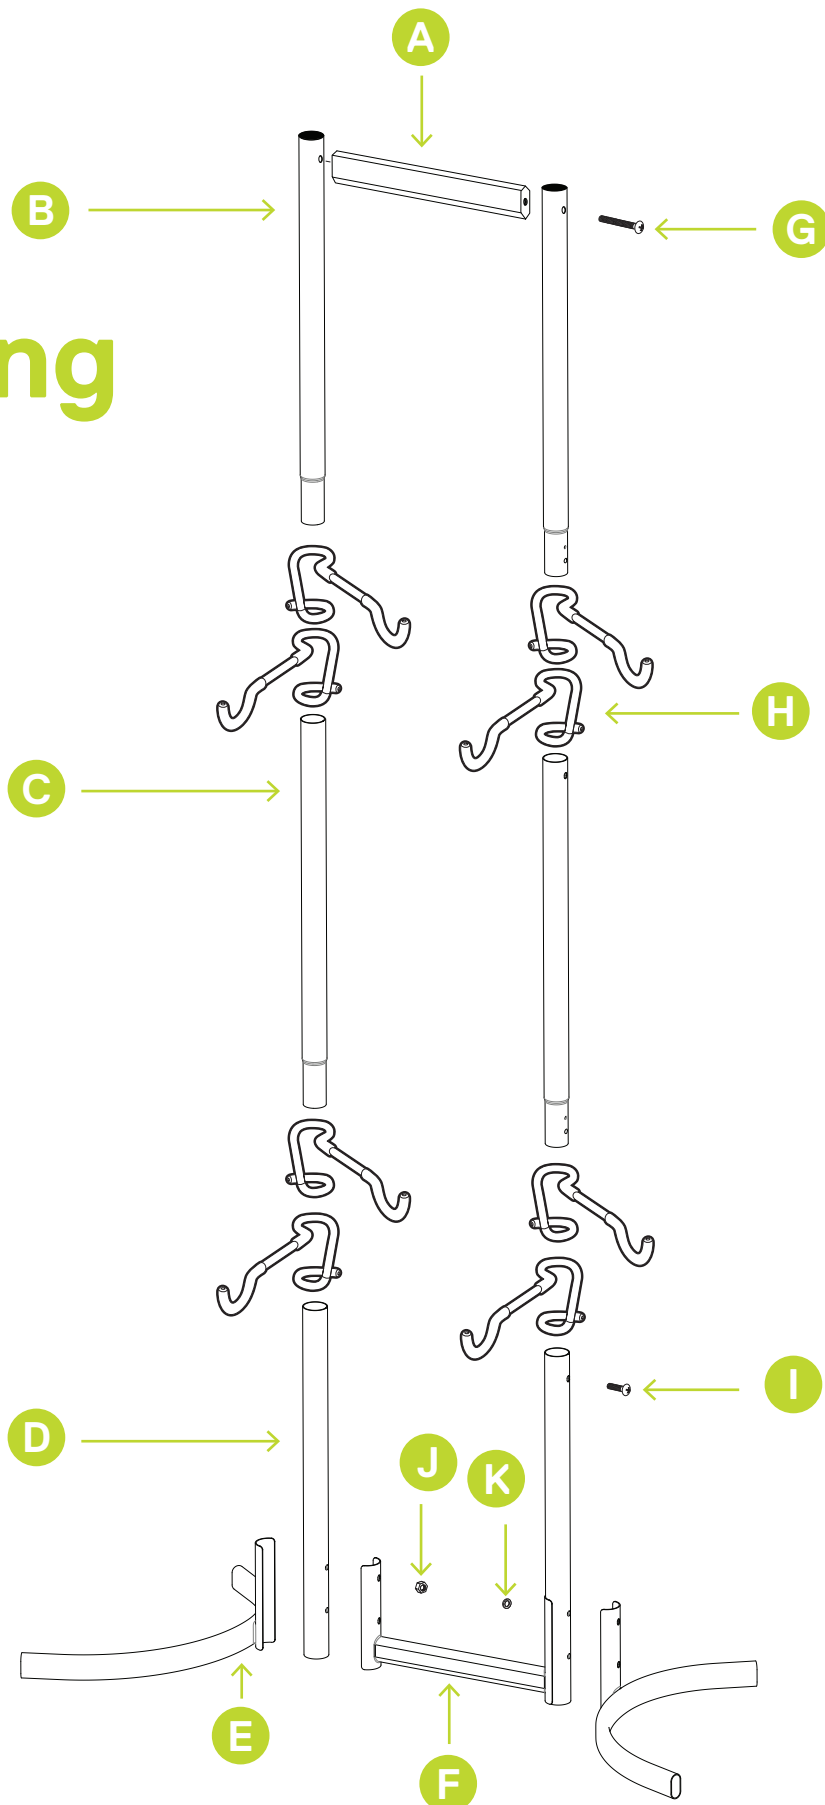


WARNING

DO NOT EXCEED MAXIMUM TOTAL WEIGHT LIMIT OF 160 LBS (70 Kgs)

MAX LOAD PER HOOK: 35 LBS (15.9 kgs) / MAX WEIGHT PER BIKE: 40 LBS (18.2 kgs)

1


Connect base bracket, bottom poles and base stand as shown using long bolts. Do not tighten bolts until rack is fully assembled and tubes are properly aligned. Begin from the bottom and work up.

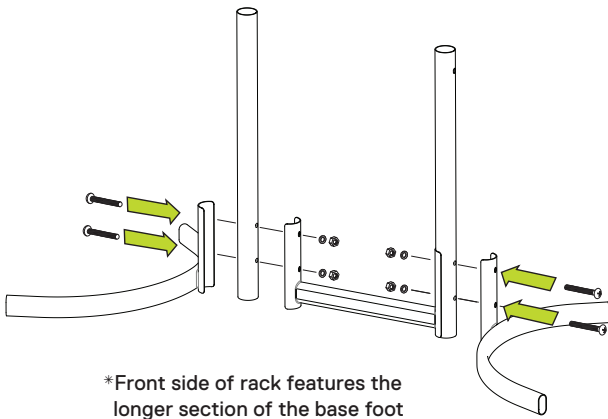

*Front side of rack features the longer section of the base foot


2

Connect center poles to bottom poles, secure with short bolts.

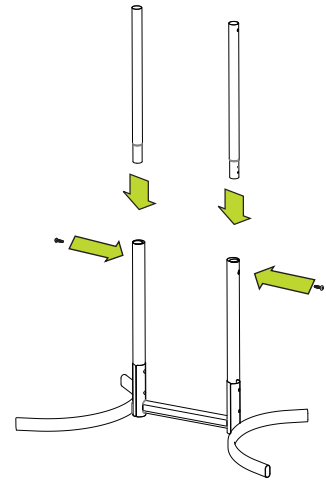


3

Connect top poles to center poles, secure with short bolts. Connect top connector to top poles using long bolts.

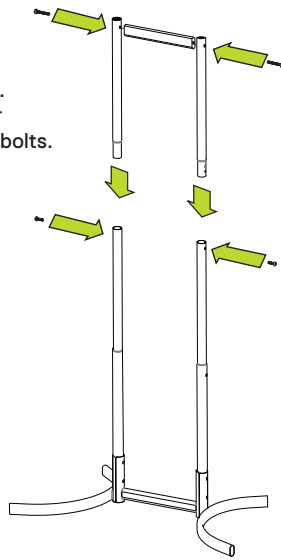


4

Tighten all bolts using an adjustable wrench before using.

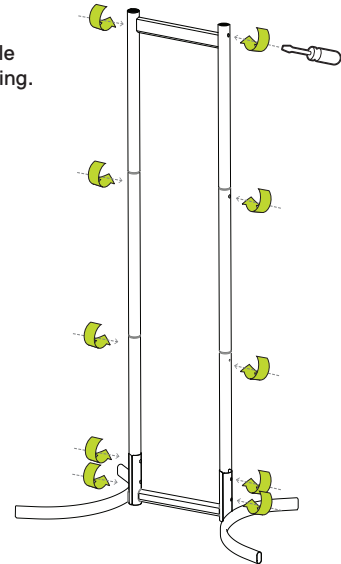

5

After rack is assembled Arms should be placed at desired height - two per bike (front and rear).

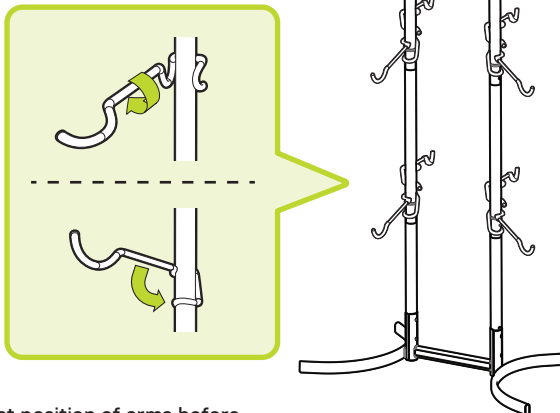

Adjust position of arms before placing bike on stand.



IMPORTANT / SAFETY

In order to maintain stability always load bikes on the front side first. Always load bikes on the bottom first and when removing bikes, take from the top first.

Need help?

Email us at service@designbydelta.com & we'll help solve your issue.

Assembly video

Visit designbydelta.com/downloads

