

delta

Single Bike Hinge Wall Mount Rack

Assembly instructions RS4100

- 1 Locate stud beneath wallboard.
- 2 Position plate at desired height and screw into place.
(screws should be in center of wall stud)




IMPORTANT SAFETY NOTE

Make sure the plate is level when mounting.

- 3 Place bike on hook to determine lower plate height.
- 4 Position bottom plate in line with top plate and screw in place.

Tools Required

Phillips Head
Screwdriver





Hand Drill 1/8"
(3mm)



Spirit Level



Way of locating studs within the wall
(see hardware store for advice)

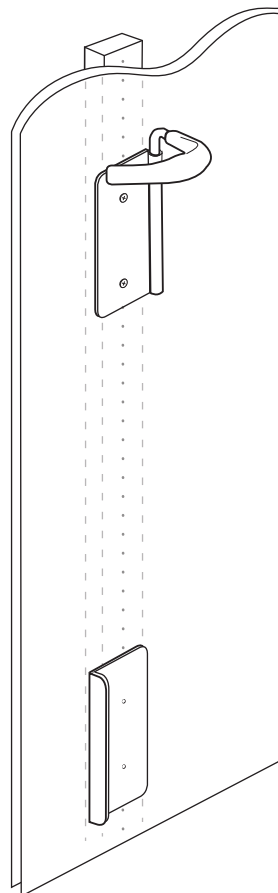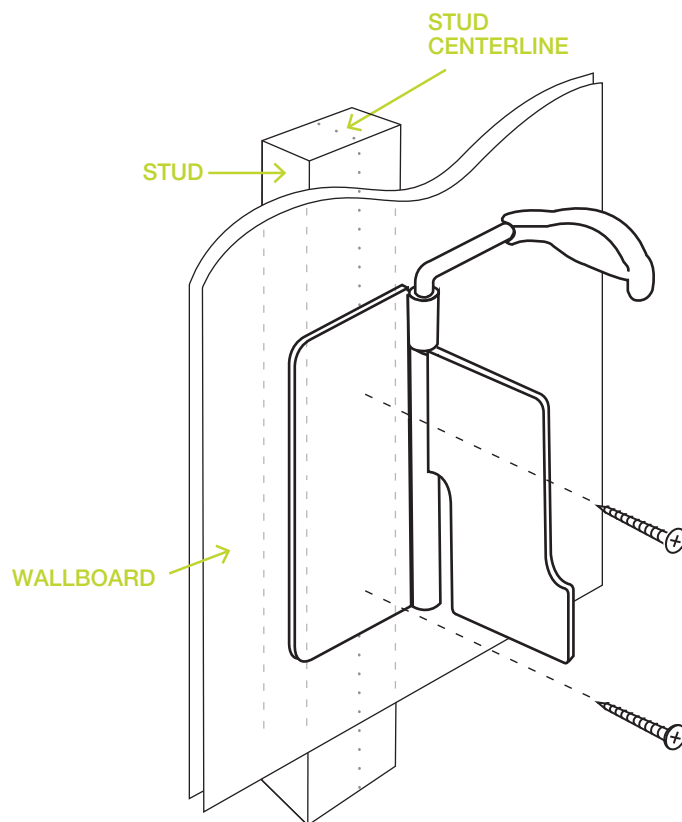

WARNING

Do not exceed maximum total weight limit of 18kg/40lbs.
Incorrect wall mounting could result in items falling and injury to persons.
Avoid mounting in a position where personal injury could result from walking into protruding rack.