



Wheel Hitch™ Front Wheel Holder


Assembly instructions BH4000

Parts

- A** x1 — Wheel Hitch
- B** x2 — Bolts
- C** x2 — Nuts



Tool Required

Allen Key (Included)

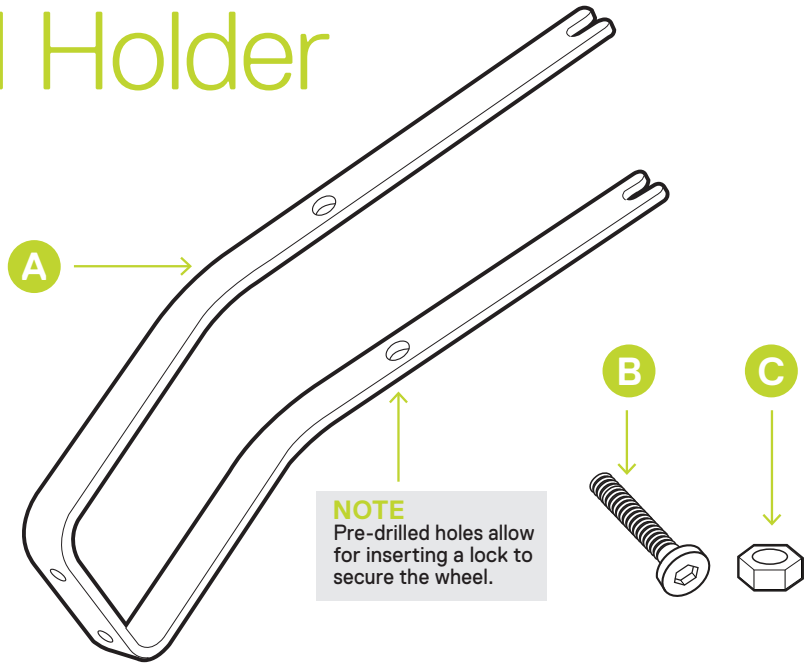

- 1** Place Wheel Hitch in desired location of flat surface and mark one hole for drilling.
- 2** Drill hole using 1/4" bit.

! IMPORTANT SAFETY NOTE
Wear eye protection when using power tools.
- 3** Insert 1/4" (6mm) diameter bolt through hole and tighten securely. (Using included nut)
- 4** Drill second hole using Wheel Hitch base as a guide.
- 5** Insert second bolt and tighten nut securely.

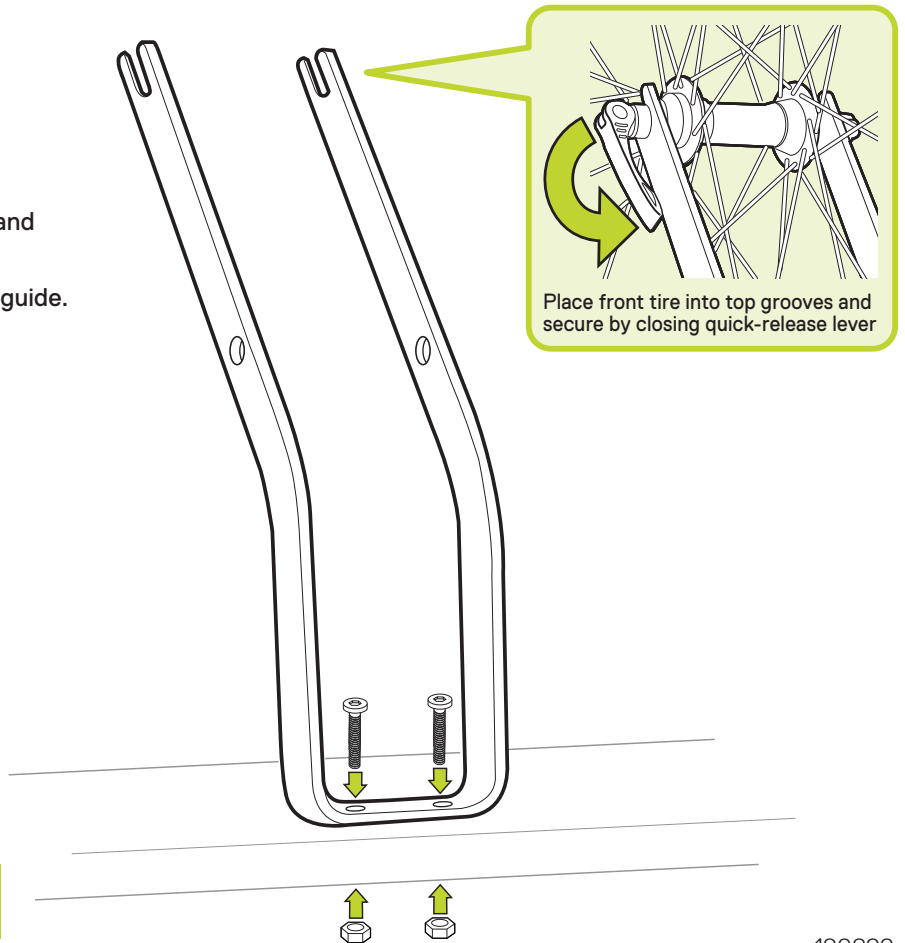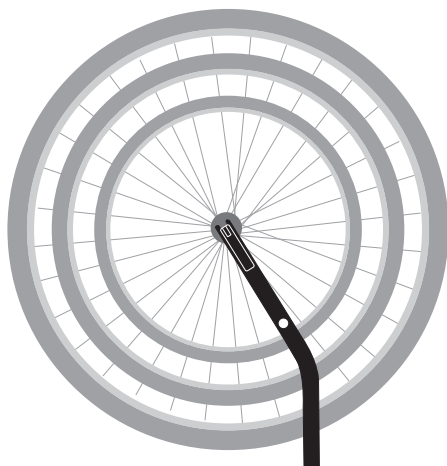

Works with 20-29 inch wheels
Fits bike with a 100 mm x 9 mm dropout



WARNING

The Wheel Hitch is designed to hold a front wheel only and has not been designed to support a rider and should never be used with a person on the bike.