

<b>GRBL01</b>	Cat. #		<b>SELSE<sup>TM</sup></b> LIGHTING PRODUCTS
	Job	Type	
			Approvals



**Annular Diffuser**

Glow soft light around.



**Reflective Cup**

Gather light and make the coverage of the light larger.

**Emergency Battery**



Emergency battery pack would provide the necessary brightness in emergency situations. Applicable ambient temperature is 10°C (50°C) to 40°F (104°F).



**Lamp bollard** Round appearance for good decorative effect and harmony with various garden scenes.

**DIMENSIONS**

unit: mm/inch

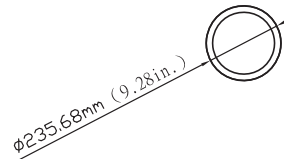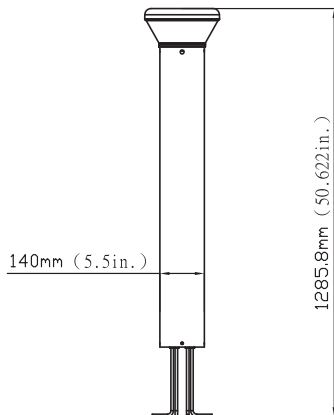

© 2019 Selser Lighting Products All rights reserved.  
 Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

**SELSE<sup>TM</sup>**  
LIGHTING PRODUCTS

Selser Lighting Products  
 Po Box 45160  
 Baton Rouge, La. 70895  
 Phone # (225) 412-0025

PERFORMANCE DATA		4000K (70CRI)		5000K (70CRI)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW
26W	120-277V	2500lm	96 lm/W	2500lm	96 lm/W

#### ELECTRICAL DATA


NUMBER OF DRIVERS	DRIVER CURRENT (mA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09

Applications: Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

#### FEATURES

- » Efficacy higher than 96 lm/W with zero uplight while consumes 26W
- » Round appearance for good decorative effect, sized in 35ft height
- » Dark bronze polyester powder-coat finish
- » 360 degrees surround illumination with 80 CRI
- » 1-10V dimming and projected over 50,000 hrs life span
- » Operating temperature is -40°C to 45°C (-40°F to 113°F)
- » Optional emergency function for emergency needs
- » Robust ground cage pre-buried installation

#### ORDER MATRIX



FIXTURE TYPE	WATTAGE	VOLTAGE	CCT	Finish	BACKUP BATTERY (Option)	Internal Code
<b>GRBL01</b>	<b>26 26W</b>	<b>27V 120-277V</b>	<b>40K 4000K 50K 5000K</b>	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White <b>SG</b> Silver Grey	<b>P0</b> 120-277V Photocell <b>Blank</b> Without Photocell	<b>Blank</b> <b>Alphanumeric</b>



© 2019 Selsler Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selsler Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

**SELSE**<sup>™</sup>  
LIGHTING PRODUCTS

Selsler Lighting Products  
Po Box 45160  
Baton Rouge, La. 70895  
Phone # (225) 412-0025