

GRWP09	Cat. #		SELSETM LIGHTING PRODUCTS
	Job	Type	
			Approvals



Small Size: 27W & 40W




Medium Size: 70W & 100W




DIMENSIONS
unit: mm/inch

Small size: 27W & 40W

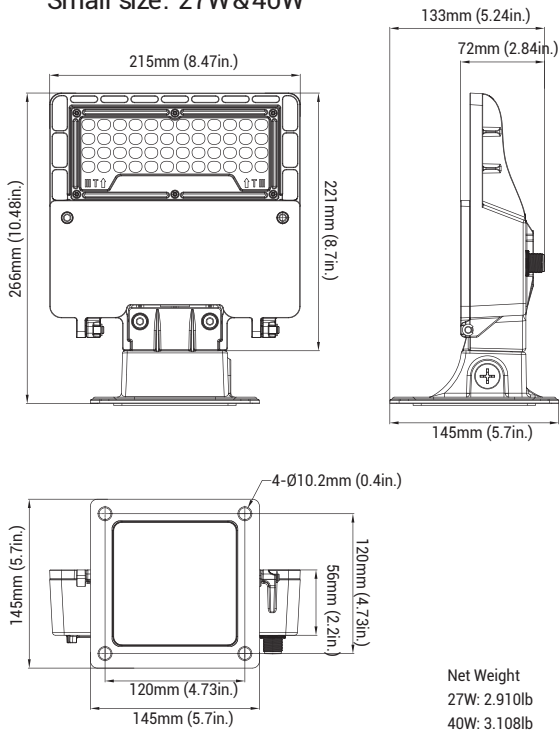

Net Weight
27W: 2.910lb
40W: 3.108lb

Medium size: 70W & 100W

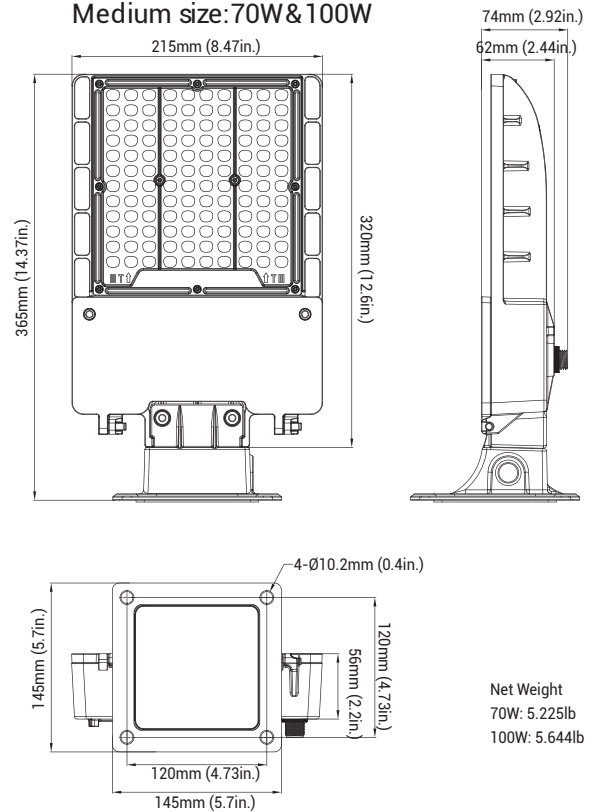

Net Weight
70W: 5.225lb
100W: 5.644lb




© 2019 Selser Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



Selser Lighting Products
Po Box 45160
Baton Rouge, La. 70895
Phone # (225) 412-0025

PHOTOMETRICS



ACCESSORIES



Photocell
No. Pc-jl-120-277v
Use: Photocell is field installed or pre-installed in factory



Emergency Battery Backup Use:
900Lm 90min
Only suitable for 70w and 100w



Sensor, 120-277V
Use: Sensor can be pre-installed in factory or field installed.

PERFORMANCE DATA

			4000K (70CRI)		5000K (70CRI)	
SYSTEM WATTS	VOLTAGE	CRI	LUMENS	LPW	LUMENS	LPW
27W	220-277V	70	3750lm	139 lm/W	3800lm	141 lm/W
40W	120-277V/347-480V	70	5350lm	134 lm/W	5400lm	135 lm/W
70W	120-277/347-480V	70	9550lm	136 lm/W	9600lm	137 lm/W
100W	120-277V	70	13850lm	139 lm/W	13900lm	139 lm/W

The GRWP09 appearance is complementary with the area/site luminaire bringing a modern architectural style to wall mounted lighting applications. The optics are specifically designed to maximize light in the desired area making it the smart choice for building-mounted doorway and pathway illumination on nearly any type of facility. To meet local requirements, emergency battery backup and a variety of motion sensor options are available.

FEATURES

- » Solid cast aluminum walls between the housing and arm create a thermal barrier between the optical and electrical compartments
- » Molded silicone gaskets throughout to insure sealing between the two compartments and ingress protection
- » Suitable for applications requiring 3G testing prescribed by ANSI C136.31
- » Light engines are available in standard 4000 K and 5000 K (70 CRI) configurations
- » Scalable Lumen Packages from 3,750 to 13,900 Lumens
- » Tempered UV coated flat lens provide outstanding performance, uniformity and glare control
- » Universal 120-277 VAC or 347-480 VAC input voltage
- » Externally mounted emergency battery backup for operation in an ambient temperature ranging from -40°C to 45°C (-40°F to 113°F)
- » Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations
- » Five-year warranty

ORDER MATRIX

FIXTURE TYPE	WATTAGE	VOLTAGE	CCT	FINISH	PHOTOCELL (Option)	SENSOR (Option)	DIMMABLE (Option)	EMERGENCY BATTERY (Option)	INTERNAL CODE
GRWP09	27 27W	27V 120-277V	40K 4000K	DB Dark Bronze B Black W White SG Silver Gray	P0 120-277V Photocell Blank Without Photocell	M With 120-277V Sensor Blank Without Sensor	D 1-10V DIM Blank NO DIM	B Emergency Battery Blank Without Emergency Battery	Blank Alphanumeric
	40 40W	48V 347-480V	50K 5000K						
	70 70W								
	100 100W								

- Note: 1. 27W is limited to 120-277V input voltage and non dimming.
2. 100W is limited to 120-277V input voltage and dimming.
3. 70W with dimming and non dimming options.
4. Only the DIM has emergency batter options.



© 2019 Selsler Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selsler Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SELSE
LIGHTING PRODUCTS

Selsler Lighting Products
Po Box 45160
Baton Rouge, La. 70895
Phone # (225) 412-0025