




KEEP FOR FUTURE REFERENCE

The product has been approved according to the strictest European safety standards (ECE R 44/04) and is suitable for Group I+II+III (9-36kg).

phil&teds®

columbus™

Group I+II+III (9 – 36kg)

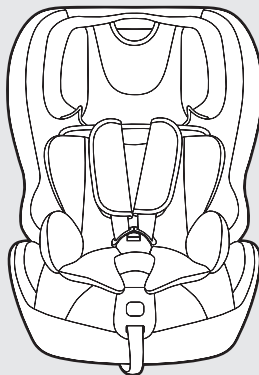

phil&teds

UNIVERSAL
Isola, Class B1
9-18 KG

UNIVERSAL /
SEMI-UNIVERSA L
15-36 KG



0444313
ECE R44/04

Contents

Contents	2	4.0 Installation in the vehicle	17 - 19
Introduction	4	4.1 tightening the harness	17
Important	5 - 7	4.2 Installation of group I with ISOFIX & top tether for children who weigh 9 - 18kg	17 - 18
Know your car seat	8 - 9	4.3 Installation of group II for the children who weigh 15 - 25kg.	19
1.0 Use in the vehicle	10 - 12	4.4 Installation of group III for children who weigh 22 - 36kg	20
1.1 Certification	10	4.5 Installation of group II / III with seatbelt and additional connectors	20
2.0 Use in the vehicle	11 - 12	5.0 Care instructions	21 - 23
2.1 Use in the vehicle	11 - 12	5.1 removing the 5 point harness system and cover	21
3.0 Securing your baby	13 - 16	5.2 Refitting the 5-point harness system and cover	22
3.1 Securing your baby using the baby insert	13	5.3 Cleaning	23
3.2 How to adjust the belts, headrest and seat positions	14	5.4 Warranty	23
3.3 Adjusting the belts	14		
3.4 Ten heights of the headrest	14		
3.5 Stepless adjustment device	15		
3.6 Securing your baby using the harness	15		
3.7 Tightening the harness	16		
3.8 Checklist to ensure your baby is buckled up correctly	16		

The columbus™ complies with requirements applicable in market of sale

For rights & remedies, refer www.philandteds.com/warranty

Please register your purchase through our online warranty registration by visiting: www.philandteds.com/register

 philandteds.com

Introduction

Dear parents

Thank you very much for purchasing our product.

The function and design of this seat delivers the highest levels of safety and comfort when your child is in this child restraint.

In order to achieve the best function, please adjust the child restraint to be suitable for your child's stature and weight before using our product.

Research shows that a high number of car safety seats are incorrectly installed. Therefore, please take the time to read through the instruction manual carefully. Our product offers maximum safety only when it is used in accordance with the instructions.

Continuous research by our development team, user tests and consumer reactions ensure that we are kept fully up to date in the field of child safety. Therefore, if you have any questions concerning the use of our product, please do not hesitate to contact us.

You can see our contact information in the service card.

Important


- **WARNING:** Read this instruction manual carefully.
- **WARNING:** The correct fitting of the ISOFIX and Top Tether anchoring systems or 3-point belt is of vital importance for the safety of your child.
- **WARNING:** For the future use of the seat, it is important that you keep the instruction manual carefully. There is a pocket on the side of the base where the instruction can be retained with the child restraint.
- **WARNING:** Never leave your child unattended in the car.
- **WARNING:** Do not use a child safety seat if the vehicle seat is equipped with a front airbag. This can be dangerous. This does not apply to so-called side airbags.
- Before using our product, please read the instruction manual carefully, the product is a safety product and is only safe when used in accordance with the instruction manual.
- The product must only be used on a forward facing seat that is fitted with the ISOFIX and Top Tether anchoring systems or 3-point belt which is approved according to ECE R16 or an equivalent standard.
- The product may be used on either the front or the back seat. However, we recommend that it is fitted on the back seat.
- The product has been approved according to the strictest European safety standards (ECE R44/04) and is suitable for Group I (9-18kg) with the ISOFIX and Top Tether anchoring systems, Group II (15-25kg) and Group III (22-36kg), or 3-point belt with 3-point belt and additional anchors.
- After an accident the seat may become unsafe due to damage that is not be noticeable immediately. It should therefore be replaced.
- The safety of the seat can only be guaranteed by the manufacturer if used by the original owner.
- We advise you strongly not to use a second-hand product, because you are not sure what has happened to it.
- The belt pads are important for the safety of your child, therefore use them all the time.
- Ensure that all luggage and objects likely to cause injury in the event of an accident are properly secured.

- It is recommended that the car seat should not be used more than 5 years from the date of production. The properties of the products may deteriorate due to, for example, ageing of the plastic and this may not be visible.
- The moving parts of the car seat should not be lubricated in any way.
- The baby car seat must not be used without the cover. Please use an original cover, as the cover contributes to the safety of the seat.
- The seat must be secured with a seat belt or ISOFIX and Top Tether, even when it not on use. An unsecured seat may injure other passengers in the car in an urgent stop.
- The rigid items and plastic parts of a child restraint must be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.
- Ensure that the seat is not damaged by the webbing between or underneath heavy luggage, adjustable seats or slamming the car door etc.
- No alterations may be made to the product as this could affect part or the overall safety of the seat
- In hot weather the plastic and metal parts of the product will be hot. You should cover the seat when the car parked under the sun. In order to prevent damage to the cover, do not remove the product's logo.
- Use the seat even in a short journey, as this is when most accidents occur.
- Before the purchase, please check that the seat is properly in your car.
- Take a regular breaks during long journeys so that your child has the opportunity to move around and stretch.
- Set a good example yourself by always wearing your seat belt. Tell your child that he/she should be never play with the belt buckle.


Questions

Contact your supplier or importer if you wish to make a warranty claim or have any other questions.

Your car seat can be fixed safely on almost seats of the cars. However, on some seats the belts are fixed so that proper installation is not possible, in that case, try another seat.

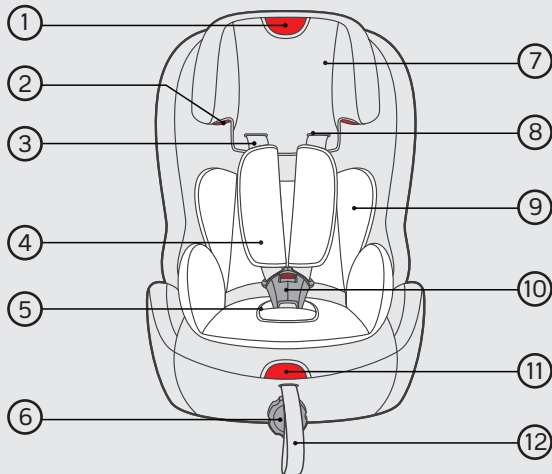

1. Headrest Handle
2. Shoulder Belt Guide
3. Harness Strap
4. Shoulder Pads
5. Buckle Pads
6. Recline Adjustment Knob
7. Headrest
8. Harness Slots
9. Baby Insert
10. Harness Buckle
11. Adjustment Device
12. Harness Adjustment Strap

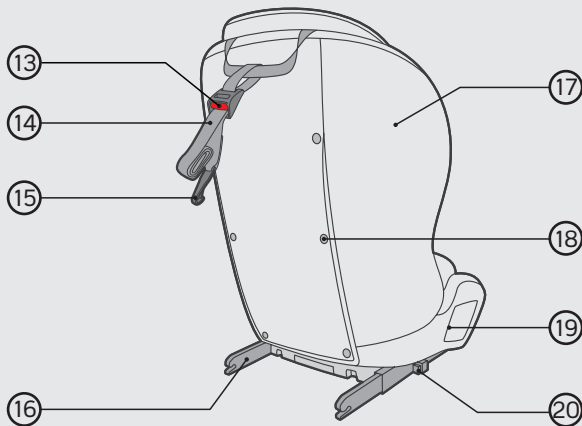

- 13. Top Tether Release Button
- 14. Top Tether Strap
- 15. Top Tether Hook
- 16. ISOFIX Connector
- 17. Cover
- 18. Snap Button
- 19. Instructions
- 20. ISOFIX Release Button

1.0 Suitability

1.1 Certification

The child safety seat has been designed, tested and certified according to the requirements of the European Standard for Child Safety Equipment (ECE R 44/04).

The seal of approval E (in a circle) and the approval number are located on the approval label (sticker on the child safety seat).

This approval will be invalidated if you make any modifications to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat.



as a child safety seat installed
in a vehicle

WELLDON / PG07-TT Child Safety Seat	Tested and certified according to ECE* R 44/04	
	Group	Body Weight
BS01N	1+2+3	9 - 36kg


*ECE = European Standard for Safety Equipment



This approval will be invalidated if you make any modifications to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat.

2.0 Use in the vehicle

2.1 Use in the vehicle



**DO NOT use with a 2-point belt -
use with a vehicle's 3-point seatbelt.**

Please observe the regulations applicable to your particular country.

Do not use with 2-point belt.

The safety belt must be approved to ECE R 16 or a comparable standard .

Can be used if the vehicle seat is equipped with a 3-point belt.

You can use your child car seat as follows:



against the direction of travel	no
with 2-point belt	no ¹⁾
with 3-point belt	yes ²⁾
on front passenger seat	yes ⁴⁾
on outer rear seat	yes
on centre rear seat	yes ⁵⁾
in the direction of travel	yes

(Please observe the regulations applicable to your particular country).




1. The use of a 2-point belt substantially increases the risk of injury to your child in the event of an accident.
2. The safety belt must be approved to ECE R 16 or a comparable standard (see test label on belt with an "E" or "e" in a circle).
3. If there is a front airbag: slide the passenger seat back fully and refer to any instructions in vehicle owner's manual.
4. Do not use on passenger seats with a front airbag! The front passenger seat may be used with or without ISOFIX, with the same notes as currently given for the ISOFIX (slide the seat back and refer to vehicle instructions).
5. Can be used if the vehicle seat is equipped with a 3-point belt.

3.0 Securing your baby

3.1 Securing your baby using the baby insert



For the protection of your baby



Baby Insert

The baby insert gives your baby the necessary support while he or she is still small.

The baby insert is used to provide extra comfort for the very small babies.



Caution! Please use the baby insert attached to this car seat when your baby's weight is less than 15kg.

Always secure your baby in the car seat using the harness.

Never leave your baby unattended in the car seat when placing it on elevated surfaces (e.g. a table, nappy changing unit, etc.).

Never allow the strap end to become caught in moving parts (e.g. automatic doors, escalators, etc.).

Caution! The plastic parts of the car seat heat up in the sun, so that your baby may get burnt. Protect your baby and the car seat against intensive solar radiation (e.g. by putting a light cloth over the seat).

Take your baby out of the car seat as often as possible to relieve its spine. We recommend frequent breaks during long journeys. Even outside of the car, please avoid leaving your baby in the car seat for too long.

3.2 How to adjust the belts, headrest and seat positions




The correct belt height of the shoulder belts is attained when the belt disappears into the shell slightly above the shoulder of the child.

Make sure that the shoulder belts fit properly over the shoulders of the child.




3.3 Adjusting the belts

- Loosen the harness straps by pressing the release button and pulling the harness straps as far as you can. (3a)
- Note! Do not pull the shoulder pads.




3.4 Ten heights of the headrest

- Group 1: The headrest can be set at five different heights with the shoulder belts axle in place. Groups 2 and 3: five additional positions once the shoulder belts axle and harness straps has been removed.
- Press the button on the headrest handle on the top of the seat. It is important to make sure the headrest fits properly to head. (3b) (3c)



3.5 Stepless adjustment device

- The recline angles of the car seat can be adjusted by front knob. (3d)
- Rotate clockwise to add the recline angles, to reduce in the opposite, as shown by the icon on the knob. (3e)

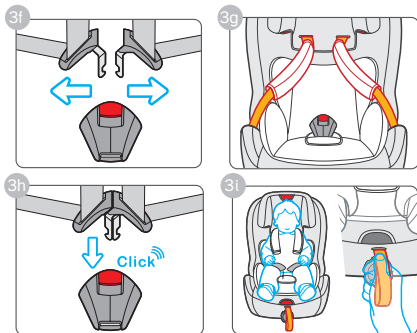

3.6 Securing your baby using the harness

- Loosen the harness straps by pressing the release button and pulling the harness straps as far as you can. Note! Do not pull the shoulder pads. (3a)
- Open the harness buckle(3f), then place the harness straps to the sides of the car seat. (3g) Put the baby into the car seat.
- The correct belt height of the shoulder pads is attained when the strap disappears into the shell slightly above the shoulder of the child. Make sure that the harness straps fit properly over the shoulders of the child. (3c)
- Slide buckle tongues together and insert them in the buckle with an audible sound "click". (3h)
- Pull the straps tight by the harness adjustment strap, and make sure the tightness is comfortable to your kid. (3i)




CAUTION: Do not twist or interchange the harness straps.

3.7 Tightening the harness



Pull the straps end straight towards you, not upwards or downwards.

Please pay attention to the strap end. Whilst traveling (especially outside the car) it should always be attached to the cover. (3j)




3.8 Checklist to ensure your baby is buckled up correctly



For the safety of your baby please check that...

- The harness straps of the car seat are comfortable but firm fit around your child.
- The harness straps are adjusted correctly.
- The harness straps are not twisted.
- The buckle tongues are engaged in the harness buckle.



4.0 Installation in the vehicle

4.1 Tightening the harness



Please do not leave your child unattended in the child safety seat in the vehicle.



For the protection of all vehicle occupants

In the case of an emergency stop or an accident unsecured persons or objects may cause injury to other vehicle occupants. Please always check that...

- The backrests of the vehicle seats are locked (i.e. that a foldable rear seat bench latch is engaged).
- All heavy or sharp-edged objects in the vehicle (e.g. on the parcel shelf) are secured.
- All persons in the vehicle have their seat belts fastened.
- The child safety seat is always secured when it is in the vehicle, even if no child is being transported.

To protect your vehicle:

Some vehicle seat covers of sensitive materials (e.g. velour, leather, etc.) may develop wear marks when child seats are used. This can be avoided by placing a blanket or towel under the child seat.

4.2 Installation of Group I with ISOFIX and Top tether for children who weigh 9-18kg




First please check if there are 2 ISOFIX anchorages in the perpendicular intersection of the vehicle seat back and seat cushion, and the user-ready tether anchorage behind the vehicle seat.



Tip: The user-ready tether anchorage usually permanently installed on the inner rear luggage shelf or on the vehicle floor. Details you could read your vehicle guidelines or contact the vehicle manufacturer.








- Press the ISOFIX release button and push the ISOFIX connectors forward as far as possible. (4a)





If the top tether is tightened correctly, a green mark will turn up on the other end of the strap release button, please do check it.

- Push the ISOFIX connectors directly into the anchorages until heard an audible sound "click". (4b) (4c)
- Grasp the seat body to check the seat if it is fastened tightly or shakes. If the seat shakes and the ISOFIX connectors are pulled out, please repeat the above steps and install it again. (4d)
- Pull out the top tether and press the tether strap release button to extend the strap until it is long enough to hook the user-ready tether anchorage behind. (4e) (4f)
- Hook the tether strap hook onto the user-ready anchorages. Check there maybe are 3 anchorages for the hook, please find one in your favor. (4g) (4h)
- Pull the tether strap on another end back to tighten the top tether. (4i)



4.3 Installation of Group II for children who weigh 15-25kg

- Before the installation, please take away the Harness system of baby car seat. (4a) Note: The Baby insert, Harness strap, Harness buckle, Buckle pads and Shoulder pads should be stored away safely for future use (see 5.1 Removing the S-point harness system and cover).




Do not to use any load bearing contact points other than those described in the instructions and marked in the child restraint. The belt must be routed as shown in the instructions.



Note: In the interest of safety the seatbelt retractor must be switched to ALR mode when using the car seat in group 2 & 3. Please refer to your vehicle user instructions for further information.

- Put the shoulder belt through the shoulder belt guide under the headrest. (4k)
- Place your child into the car seat and pass the belts through the bottom of the armrest. Fasten the car belt with an audible sound "click". (4l) (4m)
- Make sure the Lap belt is stretched as low as possible over the child's hips within the Belt guides, and fastened into the buckle. The Shoulder belt must cross midway between child's shoulder and neck. (4n)



4.4 Installation of Group III for children 22-36kg.

- Adjust the height of the headrest to suit your child (3b).
- Refer to the Group II installation instructions. Details please refer to P17.



Please make sure that any lap strap is worn low down, so that the pelvis is firmly engaged.

4.5 Installation of Group II/III with seat belt and additional connectors








OPTIONS! This car seat also allow to install with the ISOFIX, please operate as following:

- Extend the ISOFIX connectors and fix it into the ISOFIX anchorages until you hear an audible sound "click". (4c)
- Fasten the car belt. Details please refer to the abovementioned instructions for the car belt installation for group II & III.

5.0 Care instructions






5.1 Removing the 5-point harness system and cover

- Unbutton the cover at back of the seat, and remove it (5a).
- Push down the adjustment device and pull the harness strap out off the strap yoke to unlock it (5b).
- Pull the shoulder strap axle out from the gap of the shell. Then untie the shoulder strap and pull it out from the harness slots (5c) (5d).
- Loosen the bottom part of the cover and push the strap clip through the strap clip slot. (5e) Then pull the buckle clip through the buckle clip slot (5f).
- Remove the 5-point harness system then remove the headrest cover and the shell cover. (5g)



5.2 Refitting the 5-point harness system and cover

- After washing, place the cover on the shell (5g).
- Loosen the bottom part of the cover and pull the strap clip through the strap clip slot. Then pull the buckle clip through the buckle clip slot (5h) (5i).
- Put the end of the shoulder strap through the harness slot, fix into shoulder strap axle, and lock the shoulder strap axle to the seat shell (5j) (5k).
- Also put the end of the harness strap through the harness strap slot and shell, fix into the strap yoke. Make sure the seat straps can not be rotated.(5l).
- Close the buckle, then fasten the cover all around. Close the snap buttons on the back. Check that it works! (5m).



5.3 Cleaning

Please be sure to use only original seat covers, as the seat cover is important to the proper functioning of the system. Replacement seat covers are available from your retailer and or at branches.



The child seat must not be used without the seat cover.

- The cover can be removed and washed with a mild detergent using the washing machine's cycle for delicate items (30°C). Please observe the instructions on the washing label of the cover. The colours of the cover may fade if washed at more than 30°C. Do not spin, and never tumble dry in an electric clothes dryer (the fabric may separate from the padding).
- The plastic parts can be cleaned using soapy water. Do not use harsh cleaning agents (such as solvents).
- The harness can be removed and washed in lukewarm soapy water.
- **Caution!** Never remove the buckle tongues from the straps.

5.4 Warranty

The warranty period starts from the date of purchase and is valid for a period of 12 months. The warranty is only applicable to the original owner and is not transferable. The warranty is only applicable to products that have not been adapted by the user. In the case of any defects, the owner is required to return the product to the retailer. If the retailer can not solve the problem, he must return the product, complete with a clear description of the complaint and a validated purchase receipt to the manufacturer. Exchange or return can not be demanded. Repairs do not constitute an extension. The manufacturer is not liable for any damages other than those on products supplied.

No warranty is given if:

- The product is not supplied complete with the validated purchase receipt to the manufacturer.
- Defects are caused by misuse or maintenance which differ from that indicated in the instruction manual.
- Repairs are carried out by third parties.
- Defects are caused by neglect.
- Damage or removal of any serial number is found. If there is normal wear and tear which may be expected from everyday use.
- The stated warranty terms and conditions have not been satisfied.

Notice

1. This is a child restraint system approved Regulation No.44,04 standards, for three different types of installation: using the ISOFIX and Top Tether anchoring systems, the device is classified as a "Universal" for Group1(9-18kg), which under more stringent conditions than those that were applied to earlier designs which do not carry this notice. - using the child car seat without the additional ISOFOX, with the 3-point car seat belts, the device is classified as a "Universal" device, for Group 2&3(15-36kg) - using the additional ISOFOX, with the 3-point car seat belts, the device is classified as a "Semi-Universal" device which is compatible for use on the vehicles indicated in the relative "List of approved vehicles" for Group 2&3(15-36kg).
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.
3. To use the UNIVERSAL ISOFIX SYSTEM, it is approved to Regulation No. 44, 04 series of amendments for general use in vehicles fitted with ISOFIX anchorage systems. It will fit vehicles with positions approved as ISOFIX positions (as detailed in the vehicle handbook), depending on the category of the child seat and of the fixture.
4. The mass group and the ISOFIX size class for which this device is intended is: ISOFIX size class B1.
5. If in doubt, consult either the child restraint manufacturer or the retailer.



© Phil and Teds Most Excellent Buggy Company Ltd 2012.

We (Phil and Teds Most Excellent Buggy Company Ltd) own the intellectual property rights in our brands, designs and inventions featured in this publication. These include, without limitation, the phil&teds, adapt&survive!, &, INLINE trade marks and INLINE DOUBLE BUGGY shape. We actively pursue people who infringe our intellectual property.

©Phil & Teds Most Excellent Buggy Company Ltd 2012.

Nous (Phil and Teds Most Excellent Buggy Company Ltd) sommes détenteurs de tous les droits de propriété intellectuelle associés à nos marques, modèles et inventions mentionnés dans le présent document. Ceux-ci incluent, sans que cela soit limitatif, les marques commerciales phil&teds, adapt&survive!, &, et INLINE et la forme du INLINE DOUBLE BUGGY. Nous engageons des poursuites contre tous ceux qui enfreignent nos droits de notre propriété intellectuelle.

© Phil and Teds Most Excellent Buggy Company Ltd 2012.

Wir (Phil and Teds Most Excellent Buggy Company Ltd) sind Eigentümer aller geistigen Eigentumsrechte bezüglich unserer in dieser Veröffentlichung aufgeführten Marken, Designs und Erfindungen. Diese schließen die Marken phil&teds, adapt&survive!, &, und INLINE sowie die Form INLINE DOUBLE BUGGY ohne Einschränkungen ein. Personen, die unsere Eigentumsrechte verletzen, werden von uns aktiv verfolgt.

© Phil and Teds Most Excellent Buggy Company Ltd 2012.

Nos pertenecen a nosotros (Phil and Teds Most Excellent Buggy Company Ltd) los derechos de propiedad intelectual de nuestras marcas, diseños e inventos mostrados en la presente publicación. Se incluyen, sin limitarse a, las marcas phil&teds, adapt&survive!, &, e INLINE la forma de INLINE DOUBLE BUGGY. Iniciaremos acciones legales contra aquéllos que violen nuestra propiedad intelectual.

© Phil and Teds Most Excellent Buggy Company Ltd 2012.

Wij (Phil and Teds Most Excellent Buggy Company Ltd) bezitten de intellectuele eigendomsrechten op onze merken, ontwerpen en uitvindingen die in deze publicatie worden vermeld. Dit zijn, zonder beperking, de handelsmerken phil&teds, adapt&survive!, &, INLINE en de INLINE DOUBLE BUGGY-vorm. We dienen daadwerkelijk een aanklacht in tegen degenen die inbreuk maken op ons intellectueel eigendomsrecht.

© Phil and Teds Most Excellent Buggy Company Ltd 2012.

Vi (Phil and Teds Most Excellent Buggy Company Ltd) ejer de intellektuelle ejendomsrettigheder til vores mærker, design og opfindelser, der fremgår af denne publikation. Disse omfatter, uden begrænsning, varemærkerne phil&teds, adapt&survive! og INLINE samt INLINE DOUBLE BUGGY-formen. Vi følger aktivt personer, der krænker vores intellektuelle ejendom.



AUS/NZL

phil&teds
102-112 Daniell Street
Newtown, Wellington 6021
New Zealand
+ 64 4 3800 833

USA/CAN

phil&teds USA Inc
221 Jefferson Street
Fort Collins, CO 80524
USA.
1 800 839 4985

GBR

phil&teds UK
71-73 Victoria St
Windsor, Berkshire
SL4 1EH, United Kingdom
+44 (0) 20-30519264

EUR/FRA

phil&teds Spain
Calle Casas de Campos
N°15, 3° Planta
Malaga 29001, Spain
+34-91-290 14 82

CHN

phil&teds China
No.10 East Chuangyeyuan
Road, Yangzhou
China
0086-514-87634533

Designed in New Zealand. Made in China
Conçu en Nouvelle Zélande. Fabriqué en Chine

Produit conforme aux exigences de sécurité

