



Quickinfo

GENERAL
track light

LED
COB LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME
L80 / 50,000h

OPTICAL
direct illumination
beam angle 12°, 18°, 25°, 40°

ELECTRICAL
non DIM

PHYSICAL
aluminium
powder coating

Function

ALPHA S perfectly combines design and function. The head rotates through 355° and pivots through 90°. The rotating position can be read by the scale marked on LED driver box. Optimized passive cooling system ensures low temperature and long lifetime of LED.

Front ring provides good glare control. A combination of perfectly developed lens and reflector provides highly precise light distribution.

Features



Transparent gear box cover makes it easy for driver maintenance
Delicate detail for scale markings

Order options

SYSTEM POWER
15W
28W

COLOUR TEMPERATURE
2700K
3000K
4000K

COLOUR RENDERING INDEX
CRI 80
CRI 90


HOUSING




REFLECTOR



ANTI-GLARE ACCESSORY




TRACK ADAPTER




ALPHA S

3000K
(Standard)



Light distribution for 3000K


15 W 1000lm-1100lm

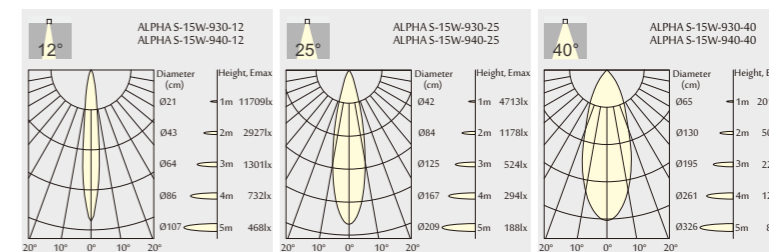

Order Information

ALPHA S-15W 1000 Lm MODELS		(CITIZEN LED)						
Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM
ALPHA S-15W-930-12	1300 lm	1000 lm	11715 cd	13 W	15 W	90	3000K	12°
ALPHA S-15W-940-12	1400 lm	1100 lm	12392 cd	13 W	15 W	90	4000K	12°
ALPHA S-15W-930-25	1300 lm	1000 lm	4721 cd	13 W	15 W	90	3000K	25°
ALPHA S-15W-940-25	1400 lm	1100 lm	5056 cd	13 W	15 W	90	4000K	25°
ALPHA S-15W-930-40	1300 lm	1000 lm	2018 cd	13 W	15 W	90	3000K	40°
ALPHA S-15W-940-40	1400 lm	1100 lm	2078 cd	13 W	15 W	90	4000K	40°

28 W 1900-2000lm

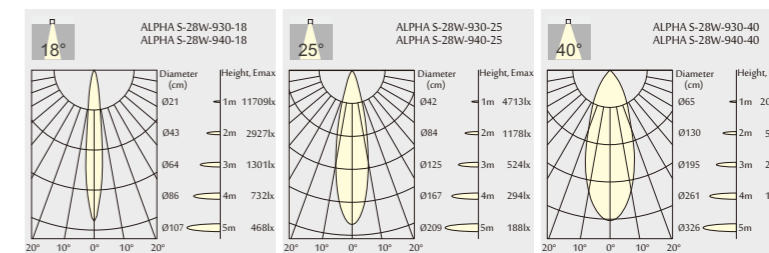

Order Information

ALPHA S-28W 1900 Lm MODELS		(CITIZEN LED)						
Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM
ALPHA S-28W-930-18	2500 lm	1900 lm	11606 cd	25 W	28 W	90	3000K	18°
ALPHA S-28W-940-18	2600 lm	2000 lm	12158 cd	25 W	28 W	90	4000K	18°
ALPHA S-28W-930-25	2500 lm	1900 lm	6890 cd	25 W	28 W	90	3000K	25°
ALPHA S-28W-940-25	2600 lm	2000 lm	7260 cd	25 W	28 W	90	4000K	25°
ALPHA S-28W-930-40	2500 lm	1900 lm	3305 cd	25 W	28 W	90	3000K	40°
ALPHA S-28W-940-40	2600 lm	2000 lm	3478 cd	25 W	28 W	90	4000K	40°