




>> MORE INFO

		P	CCT	I	Flux	LOR
SHOT LIGHT M 1	A297-01-10-   N   W   NMG   WMG	5W	2700K	150mA	675 lm	86%
	A297-01-11-   N   W   NMG   WMG	5W	3000K	150mA	700 lm	86%
	A297-01-12-   N   W   NMG   WMG	5W	4000K	150mA	710 lm	86%
SHOT LIGHT M 2	A297-02-10-   N   W   NMG   WMG	6,5W	2700K	200mA	910 lm	86%
	A297-02-11-   N   W   NMG   WMG	6,5W	3000K	200mA	940 lm	86%
	A297-02-12-   N   W   NMG   WMG	6,5W	4000K	200mA	960 lm	86%
	A297-02-30-   N   W   NMG   WMG	6,5W	2700K	200mA	910 lm	86%
	A297-02-31-   N   W   NMG   WMG	6,5W	3000K	200mA	940 lm	86%
	A297-02-32-   N   W   NMG   WMG	6,5W	4000K	200mA	960 lm	86%
SHOT LIGHT M 3	A297-03-10-   N   W   NMG   WMG	10,3W	2700K	300mA	1230 lm	86%
	A297-03-11-   N   W   NMG   WMG	10,3W	3000K	300mA	1280 lm	86%
	A297-03-12-   N   W   NMG   WMG	10,3W	4000K	300mA	1300 lm	86%
	A297-03-30-   N   W   NMG   WMG	10,3W	2700K	300mA	1230 lm	86%
	A297-03-31-   N   W   NMG   WMG	10,3W	3000K	300mA	1280 lm	86%
	A297-03-32-   N   W   NMG   WMG	10,3W	4000K	300mA	1300 lm	86%

220 V~ | 240 V~ | IP20 | CRI>90 | L80B10 >60.000h

\* PHASE CUT & OTHER DIM OPTIONS PLEASE CONSULT

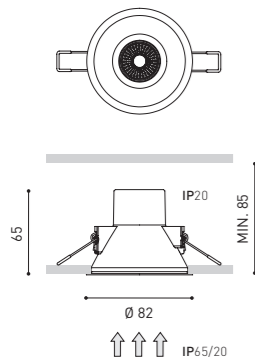

		P	CCT	I	Flux	LOR
SHOT LIGHT M IP65 1	A297-21-10-   N   W	5W	2700K	150mA	675 lm	78%
	A297-21-11-   N   W	5W	3000K	150mA	700 lm	78%
	A297-21-12-   N   W	5W	4000K	150mA	710 lm	78%
SHOT LIGHT M IP65 2	A297-22-10-   N   W	6,5W	2700K	200mA	910 lm	78%
	A297-22-11-   N   W	6,5W	3000K	200mA	940 lm	78%
	A297-22-12-   N   W	6,5W	4000K	200mA	960 lm	78%
	A297-22-30-   N   W	6,5W	2700K	200mA	910 lm	78%
	A297-22-31-   N   W	6,5W	3000K	200mA	940 lm	78%
	A297-22-32-   N   W	6,5W	4000K	200mA	960 lm	78%
SHOT LIGHT M IP65 3	A297-23-10-   N   W	10,3W	2700K	300mA	1230 lm	78%
	A297-23-11-   N   W	10,3W	3000K	300mA	1280 lm	78%
	A297-23-12-   N   W	10,3W	4000K	300mA	1300 lm	78%
	A297-23-30-   N   W	10,3W	2700K	300mA	1230 lm	78%
	A297-23-31-   N   W	10,3W	3000K	300mA	1280 lm	78%
	A297-23-32-   N   W	10,3W	4000K	300mA	1300 lm	78%

220 V~ | 240 V~ | IP65 | CRI>90 | L80B10 >60.000h

\* PHASE CUT & OTHER DIM OPTIONS PLEASE CONSULT



OPTIONAL

SHOT LIGHT M High Chromatic LED ⓘ » 536

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

COLOUR | N ■ | W □ | NMG ■■ | WMG □■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 538

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N, NMG & WMG COLOURS

Ⓢ & Ⓢ » PLEASE CONSULT




>> MORE INFO

		P	CCT	I	Flux	LOR
SHOT LIGHT M 1 Trimless	A298-01-10-   N   W   NMG	5W	2700K	150mA	675 lm	86%
	A298-01-11-   N   W   NMG	5W	3000K	150mA	700 lm	86%
	A298-01-12-   N   W   NMG	5W	4000K	150mA	710 lm	86%
SHOT LIGHT M 2 Trimless	A298-02-10-   N   W   NMG	6,5W	2700K	200mA	910 lm	86%
	A298-02-11-   N   W   NMG	6,5W	3000K	200mA	940 lm	86%
	A298-02-12-   N   W   NMG	6,5W	4000K	200mA	960 lm	86%
	A298-02-30-   N   W   NMG	6,5W	2700K	200mA	910 lm	86%
	A298-02-31-   N   W   NMG	6,5W	3000K	200mA	940 lm	86%
	A298-02-32-   N   W   NMG	6,5W	4000K	200mA	960 lm	86%
SHOT LIGHT M 3 Trimless	A298-03-10-   N   W   NMG	10,3W	2700K	300mA	1230 lm	86%
	A298-03-11-   N   W   NMG	10,3W	3000K	300mA	1280 lm	86%
	A298-03-12-   N   W   NMG	10,3W	4000K	300mA	1300 lm	86%
	A298-03-30-   N   W   NMG	10,3W	2700K	300mA	1230 lm	86%
	A298-03-31-   N   W   NMG	10,3W	3000K	300mA	1280 lm	86%
	A298-03-32-   N   W   NMG	10,3W	4000K	300mA	1300 lm	86%

220 V~ | 240 V~ | IP20 | CRI>90 | L80B10 >60.000h

\* PHASE CUT & OTHER DIM OPTIONS PLEASE CONSULT

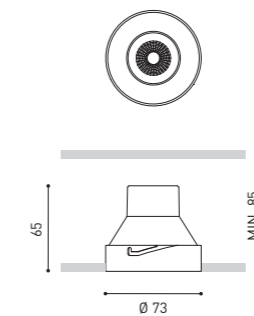


ACCESSORIES

SHOT LIGHT M High Chromatic LED ⓘ » 536

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

SHOT LIGHT M Trimless Accessory\*\* A298-00-00

\*\* MANDATORY FOR INSTALLATION ⓘ

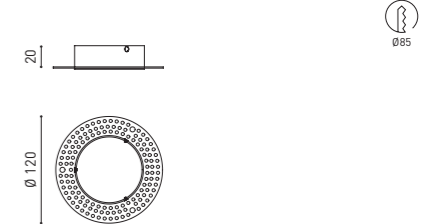

COLOUR | N ■ | W □ | NMG ■■ | MATERIAL | AL | ABS+PC | RAL ⓘ » 538

COLOURS MAY AFFECT THE LIGHTING PARAMETERS  
"THE INVISIBLE BLACK" IS ONLY AVAILABLE FOR N & NMG COLOURS

Ⓢ & Ⓢ » PLEASE CONSULT

